

ENVIRONMENTAL MANAGEMENT PLAN

FOR THE PROPOSED MINERALS EXPLORATION
FOR BASE & RARE METALS, INDUSTRIAL MINERALS,
PRECIOUS METALS, AND PRECIOUS STONE
WITHIN EPL 8177,

NEAR ARIAMSVLEI

//Karas Region



TABLE OF CONTENTS

1.	INTRODUCTION	1
	1.1. Project Activities.....	1
	1.2. Purpose of the document.....	3
	1.3. Summary of the receiving environment.....	4
2.	ENVIRONMENTAL MANAGEMENT PRINCIPLES	11
3.	ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT	13
	3.1. Communication between Parties.....	13
	3.2. The Exploration Operating Company.....	13
	3.3. Site Managers.....	14
	3.4. Environmental Control Officer (ECO).....	14
	3.5. Contractors.....	14
4.	ENVIRONMENTAL SPECIFICATIONS	16
	4.1. Compliance with the Environmental Specifications.....	16
	4.2. Training and Awareness.....	16
	4.3. Stakeholder Relations.....	16
	4.4. Permits.....	16
	4.5. Road Safety.....	16
	4.6. Access Tracks.....	17
	4.7. Conservation of Biodiversity.....	17
	4.8. Wildlife Poaching.....	17
	4.9. Soil Management and Erosion Control.....	17
	4.10. Pollution Control.....	18
	4.11. Waste Management.....	19
	4.12. Hazardous Substances.....	19
	4.13. Fire Prevention.....	19
	4.14. Archaeological Sites.....	20
	4.15. Health and Safety.....	20
	4.16. Work Stoppage.....	21
	4.17. Compliance Monitoring.....	21
5.	MITIGATION MEASURES	22

6. MONITORING PLAN 32

7. CONCLUSION 32

LIST OF FIGURES

FIGURE 1 – REGIONAL LOCATION OF THE EPL 8177 AND SURROUNDING INFRASTRUCTURE..... 6

FIGURE 2 – GEOLOGY / ROCK TYPE OF THE PROPOSED PROJECT..... 7

FIGURE 3 - GEOLOGY OF THE PROPOSED PROJECT AREA 7

FIGURE 4 - DOMINANT SOIL TYPE SURROUNDING THE PROJECT AREA 8

FIGURE 5 - GROUNDWATER BASINS AND HYDROLOGY OF THE PROJECT SITE 9

FIGURE 6 - VEGETATION OF THE PROJECT SITE..... 10

LIST OF TABLES

TABLE 1 – EMP MITIGATION MEASURES..... 23

1. INTRODUCTION

Alliance Environmental Consultancy CC (AEC) has been appointed by Geonamib Minerals CC to act on their behalf in obtaining an Environmental Clearance Certificate (ECC) for the proposed minerals exploration on Exclusive Prospecting License (EPL) 8177. The project area is located approximately 15km southeast of Ariamsvlei, a small settlement located at the foot plateau south of Namibia which borders the country from South Africa. The site is accessible via tracks from the D202 road from Ariamsvlei. The EPL covers approximately an area of 15965 hectares. Figure 1 shows the locality of the area. The exploration activities will be assessed in the scoping report and an Environmental Management Plan will be provided (This document).

1.1. Project Activities

The projected mineral exploration activities are summarized as follows:

- i. Exploration activities include a desktop review of existing data as well as all past research. This is conducted in the general area to see if there are any prospective targets. This is done by purchasing high-resolution data from the Government and interpreting it as part of the first stage of exploration.
- ii. Reconnaissance Regional reconnaissance assessment, which includes field-base activities inclusive of regional mapping and sampling in order to validate and identify prospective targeted areas identified in phase 1. This phase gives a green light for more to be done, it is only proceeded if some targets have been identified and will need further exploration.
- iii. Initial field-based activities such as widely distributed geological mapping, sampling, surveying, and maybe widely spaced trenching and drilling to verify the feasibility of any identified local target based on the regional data acquired in step 2 above. The degree or depth of exploration carried out at this stage is contingent on the discovery of viable/prospective mineral resources. Alternatively, if the specified target(s) proves to be non-variable, the license is revoked.

To assess the viability of the delineated local targets, detailed local field-based operations such as localized site-specific detailed geology mapping, trenching, bulk sample, surveying, and detailed drilling are carried out. If the detailed exploration activities yield positive results, the exploration data will be compiled into a pre-feasibility report, and if the prefeasibility

results are positive, a detailed feasibility study will be conducted on the identified site-specific area, which will include detailed site-specific drilling, bulk sampling, and laboratory testing/test mining.

The following is a summary of the envisaged project development process that will be implemented during the proposed exploration activities;

- planning and permitting
- Site preparation for the exploration team if required (temporary camps).
- Supporting infrastructure, access, energy and water supply
- Preparation of drill sites and drilling operations
- Decommissioning final rehabilitation

ACCESS AND TRANSPORT

The location will be accessible through the D202 district road and via exiting tracks as far practically possible. If the need to create new tracks arises, this will be assessed for any environmental sensitivity.

If the Proponent intends to continue with field-based activities, it is the Proponents responsibility to negotiate access agreements with landowner's interests are always observed and as may be agreed upon with the landowners individually. Permission from landowners and appropriate authorities is required for any new tracks.

RESOURCES (WATER AND ELECTRICITY)

Exploration activities usually needs a supply of water which will be brought to the site. Should the company find good groundwater during the exploration activity, the borehole may be used as a water source provided the permission of the community is given and the necessary abstraction permit is attained from the department of water affairs. Again, only sustainable yields may be abstracted. A diesel-powered generator will be used as needed for exploration equipment and lighting for the project.

ACCOMMODATION AND SUPPORTING INFRASTRUCTURE

The exploration team will either be commuting from nearby settlements or will establish camp sites within the license area and with the permission of the community. The exploration team is envisioned to consist of three skilled and 15 non-skilled workers. Clearing of vegetation at the planned drill sites will be necessary. Larger trees should be retained so that the bush can restore itself. Permits from the forestry directorate will be required for this purpose. Where necessary, stockpiling of topsoil for rehabilitation at a later stage will be undertaken.

Rehabilitation landscaping of exploration areas will be undertaken upon completion of the exploration program.

portable toilets will be installed on-site and regularly serviced. Vehicles (especially pick up bakkies) and heavy machinery including drill rigs and truck will be used during the exploration phase of the project. Waste will be collected and deposited to the nearest municipal dumpsite. Hydrocarbon tanks will be appropriately stored and banded to hold 110% of the capacity of the tanks and all relevant permits should be applied for by the proponent as required (MME).

1.2. Purpose of the document

Alliance Environmental Consultancy CC (AEC) has prepared this document as part of the Environmental Scoping and Impact Assessment for Proposed Exploration which was conducted in terms of the Environmental Management Act, 2007 (Act No 7 of 2007). This Environmental Management Plan is a live document that has been prepared based on the environmental effects identified in Environmental Scoping and Impact Assessment and should be read in conjunction with the Environmental Scoping and Impact Assessment Report.

The aim of this document is to provide management measures to address the environmental effects that have been identified in the Environmental Scoping and Impact Assessment report and to give possible mitigation measures/recommendations to address these effects. It is essential for personnel involved to fully be aware of the possible environmental issues and the means to avoid or minimize the potential impacts of activities on site.

Furthermore, the proponent fully understands the legal and policy requirements as a holder of the EPL. Impacts identified in the EIA form the basis of a set of environmental specifications that will be implemented on-site. These environmental specifications act as an agreement between the company and the Ministry of Environment, Forestry, and Tourism (MEFT).

1.3. Summary of the receiving environment

//Karas region is the largest region in the country and border the country with South Africa. The region constitutes of 6 constituencies (Keetmanshoop rural and urban, Berseba, Karasburg, Luderitz and Oranjemund) and it is the country's largest contributor towards mining activities. //Karas, its name reflects the prominence of the Karas mountain range, this region is known for its predominantly small stock farming the most dominant being sheep and goat.

The project area is located approximately 15km southeast of Ariamsvlei, a small settlement located at the foot plateau south of Namibia which borders the country from South Africa. The site is accessible via tracks from the D202 road from Ariamsvlei. The EPL covers approximately an area of 15965 hectares. **Error! Reference source not found.** shows the locality of the area.

According to Liebenberg and Krause 2010, Karas has a subtropical desert like climate though it is one of the coldest regions in the country, with an average daily temperature of 28 °C. The average highest temperature for Ariamsvlei is 35 °C and the lowest is 7°C. Other times the area has extreme temperatures rising over 40-degree Celsius and dropping to sub-zero during winter.


With the Orange River mouth recognized importantly as wetlands which holds a significant seabird population globally, Karasburg area also host a small variety of game, such as Kudus (*Tragelaphus strepsiceros*), Caracal (*Caracal caracal*), Duiker (*Sylvicapra grimmia*), Springbok (*Antidorcas marsupialis*), Jackal (*Canis aureus*), Gemsbuck (*Oryx gazella*), Bat eared fox (*Otocyon megalotis*), Aardwolf (*Proteles cristatus*), Red Hartebeest (*Alcelaphus buselaphus caama*) and Porcupine (*Hystrix africaeaustralis*) (Mendelson,2002). A number of reptiles; Broadleys Flat lizard, Water Monitor, Blacknecked spitting Cobra and Bushmanland Tent Tortoise, this diversity is found on the rocky slopes (Mendelson, 2003). Other species such as birds might exclusively also be associated with this environment.

The area falls within the Nama Karoo Biome of Namibia with grass cover of about 2 to 10%. However, the succulent area has less than 0.1% grass cover, this area might be suitable for quiver though none are observed around the area. Ariamsvlei is located in a dry farming

area, the vegetation in the surrounding consist of; trees, shrubs, grass cover and spares woodland occurring along riverbeds. Vegetation in the area is predominantly Tamarix usneoides trees associated with loam soil, other areas are populated by Phragmite australis reeds, capensis trees, Schotia afra trees, acacia erioloba, salix mucronate subps, acacia erioloba and Sisyndite spartea shrubs (Cunningham, 2010). During rainy seasons, various grass types such as Centropodia glauca and Stipagrostis species can be seen .

The majority topography consists of flat plains interspersed with rocky outcrops. The area is naturally characterized with riverbeds for short periods of time during the rainy season. The geology of the area comprises of the Namaqua Metamorphic Complex and Kuibis and Schwarzrand Subgroups. The Kuibis and Schwarzrand Subgroups of the Nama Group form a succession of shallow-marine and minor fluvial sedimentary rocks that is exposed over much of central and southern Namibia. Reports by Christelis, (2018) stated that, limited volumes of ground water are present in the basement rocks of the southern Karas Region, since there are no productive aquifers. The area falls within the orange groundwater basin. Lack of recharger and poor ground water quality in most areas further aggravates the situation. Potential available underground water is held in tributary features such joints in sedimentary rocks of origins (shale, quartz and sandstone) and in limestones as well as dolomites in forms of solutions.

Figures 2 to 5 provides some baseline maps of the project area.

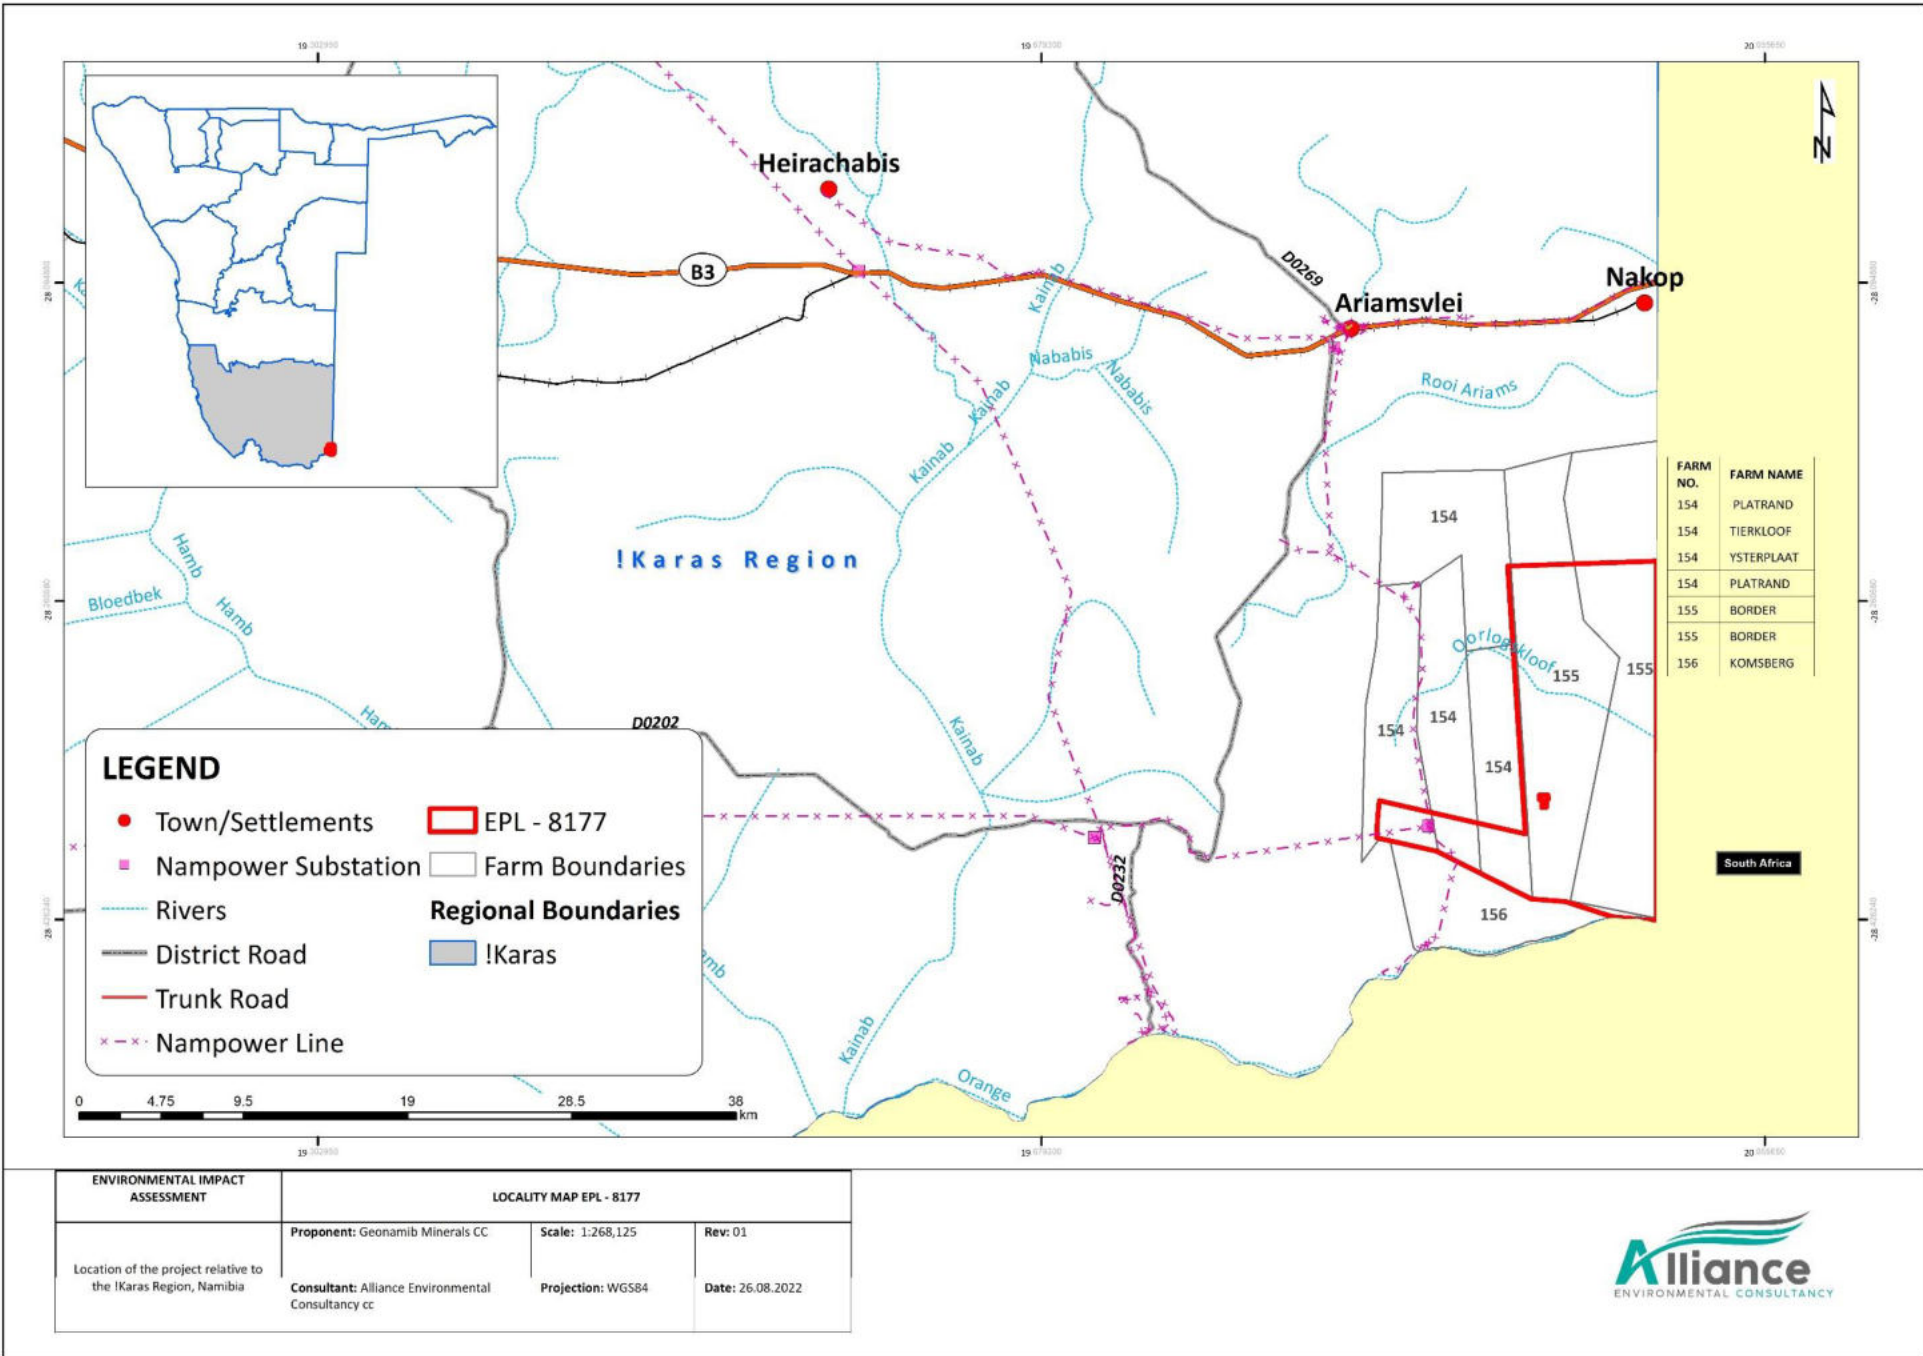

ENVIRONMENTAL IMPACT ASSESSMENT	LOCALITY MAP EPL - 8177		
Location of the project relative to the !Karas Region, Namibia	Proponent: Geonamib Minerals CC	Scale: 1:268,125	Rev: 01
	Consultant: Alliance Environmental Consultancy cc	Projection: WGS84	Date: 26.08.2022



FIGURE 1 – REGIONAL LOCATION OF THE EPL 8177 AND SURROUNDING INFRASTRUCTURE.

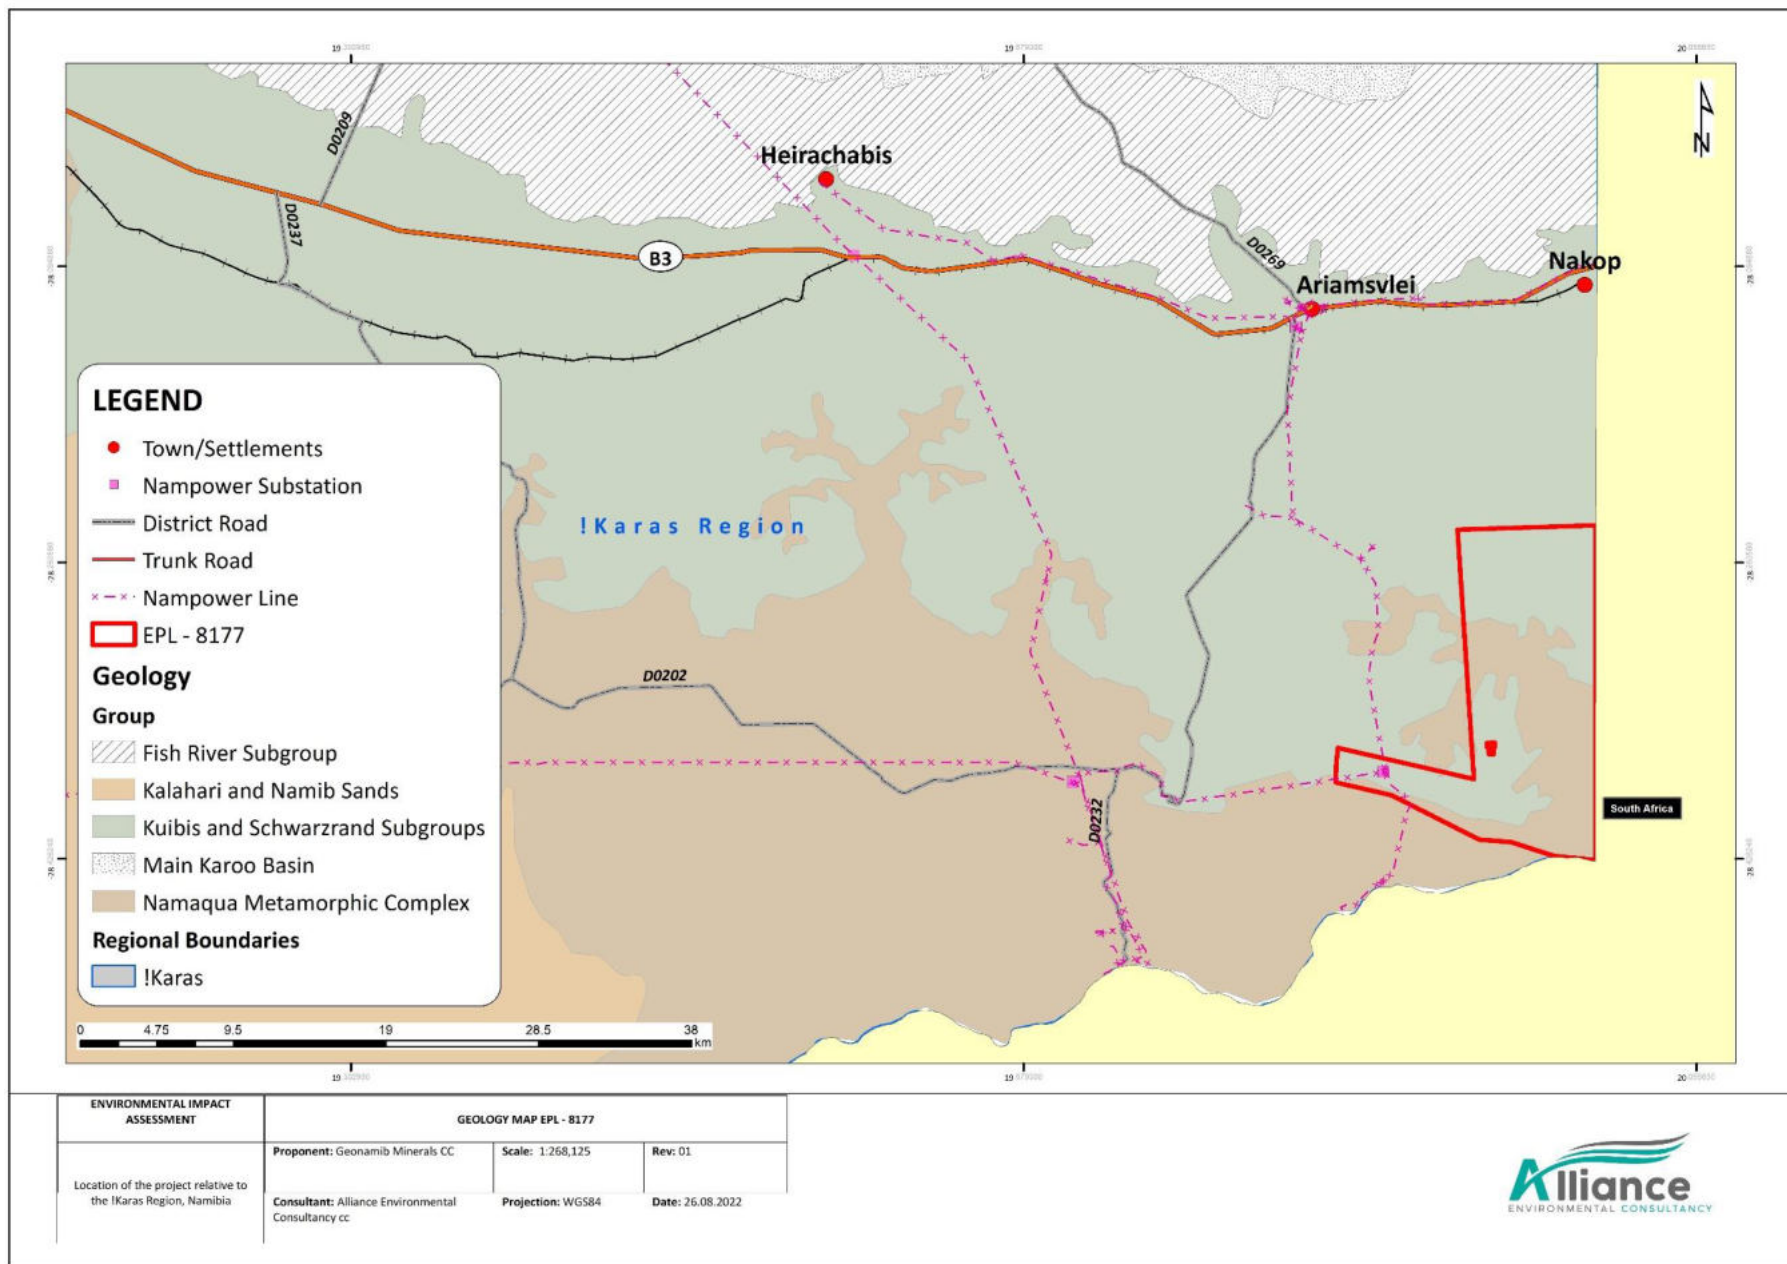


FIGURE 3 - GEOLOGY OF THE PROPOSED PROJECT AREA

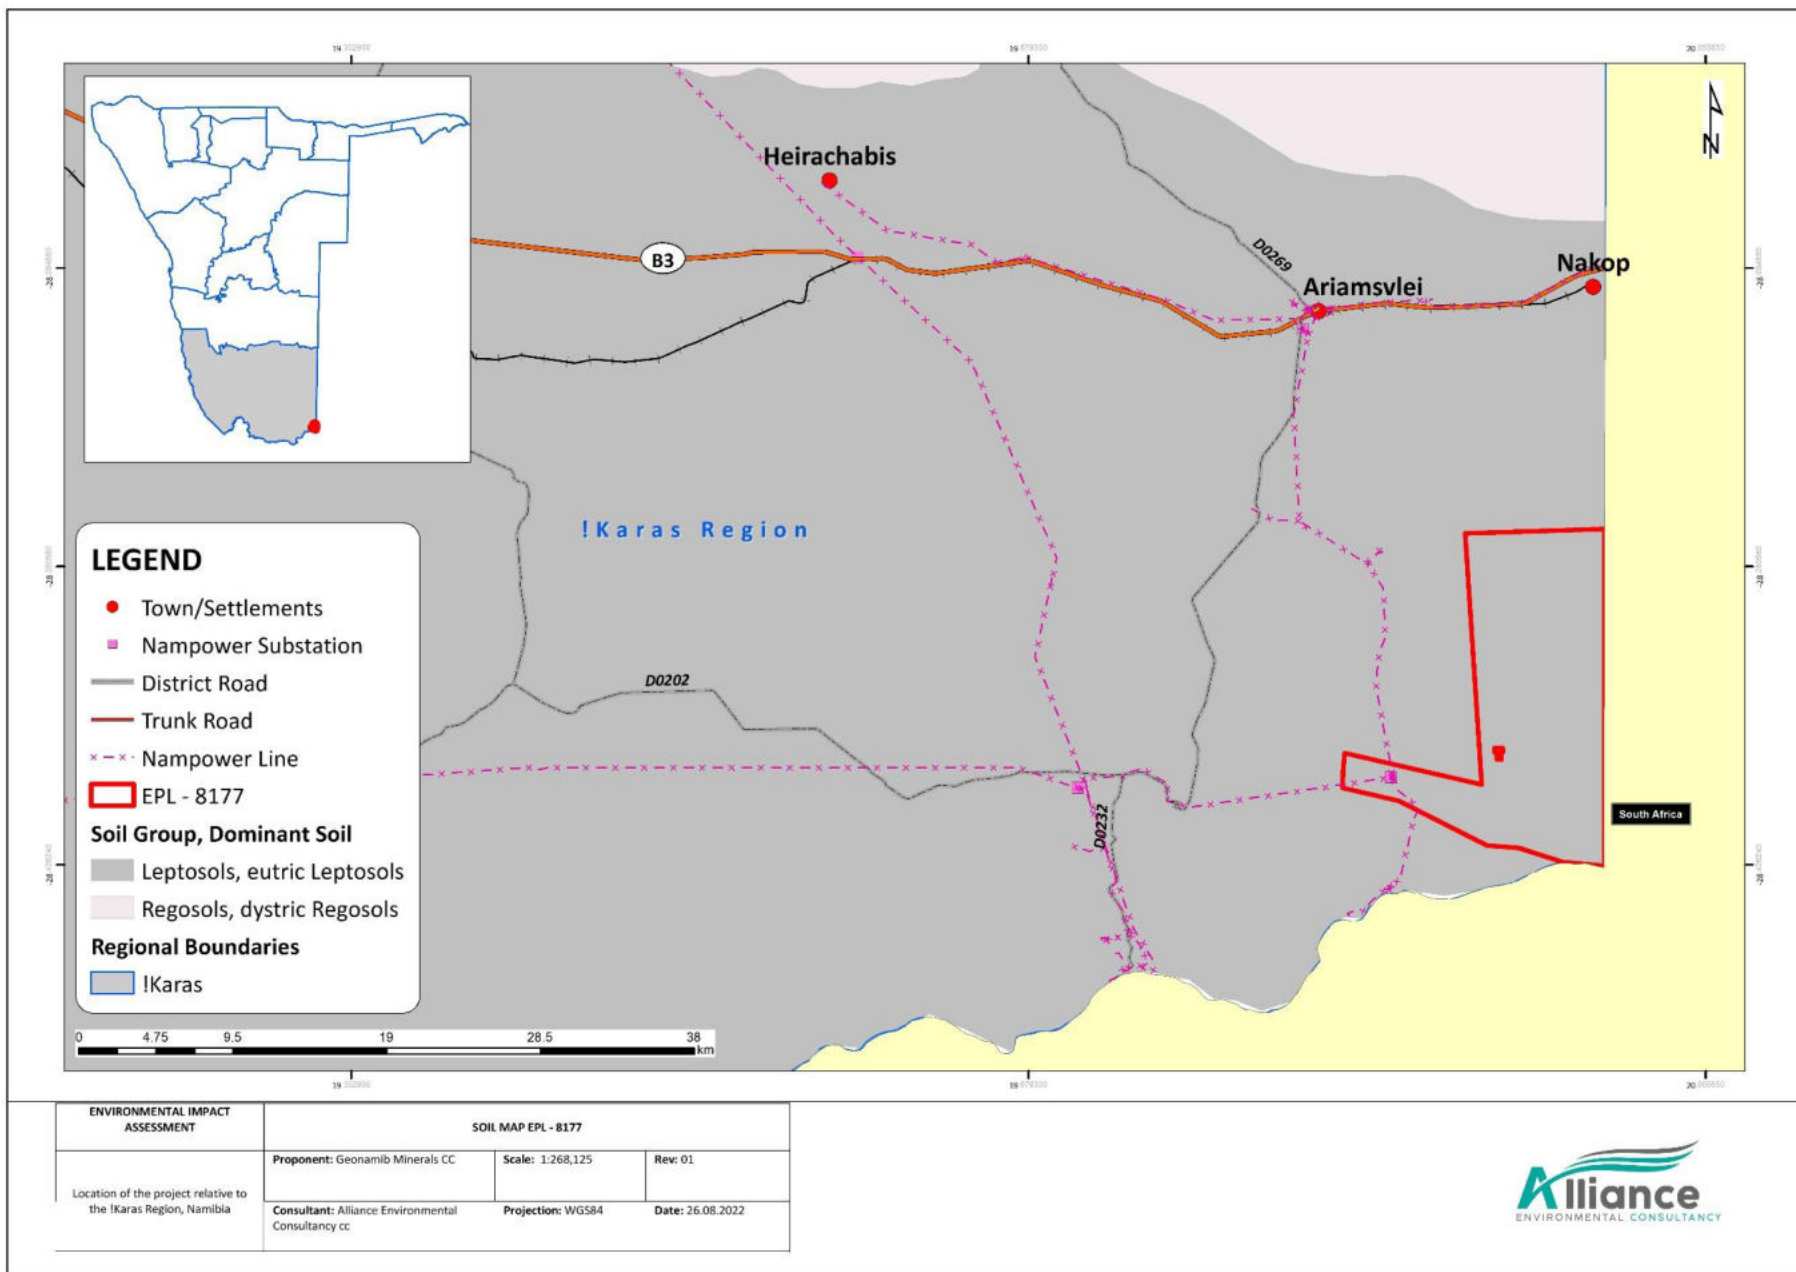


FIGURE 4 - DOMINANT SOIL TYPE SURROUNDING THE PROJECT AREA

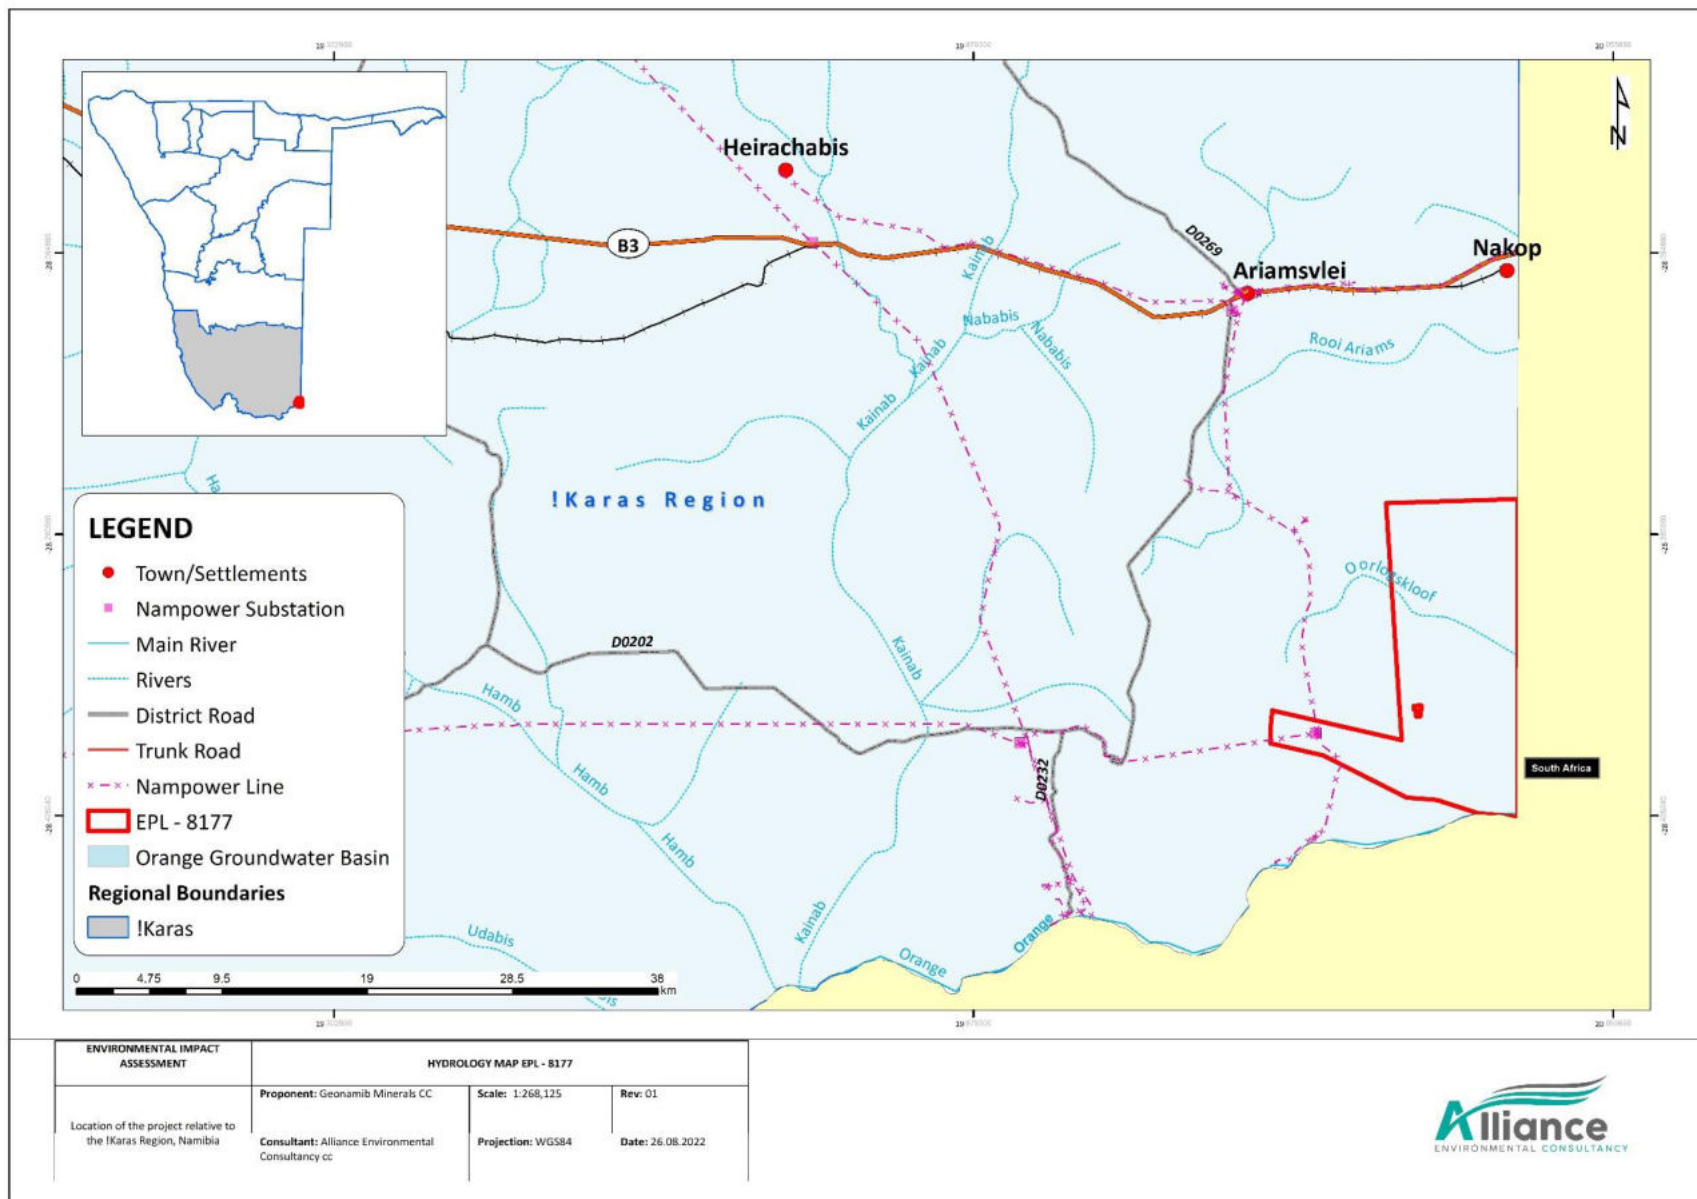


FIGURE 5 - GROUNDWATER BASINS AND HYDROLOGY OF THE PROJECT SITE

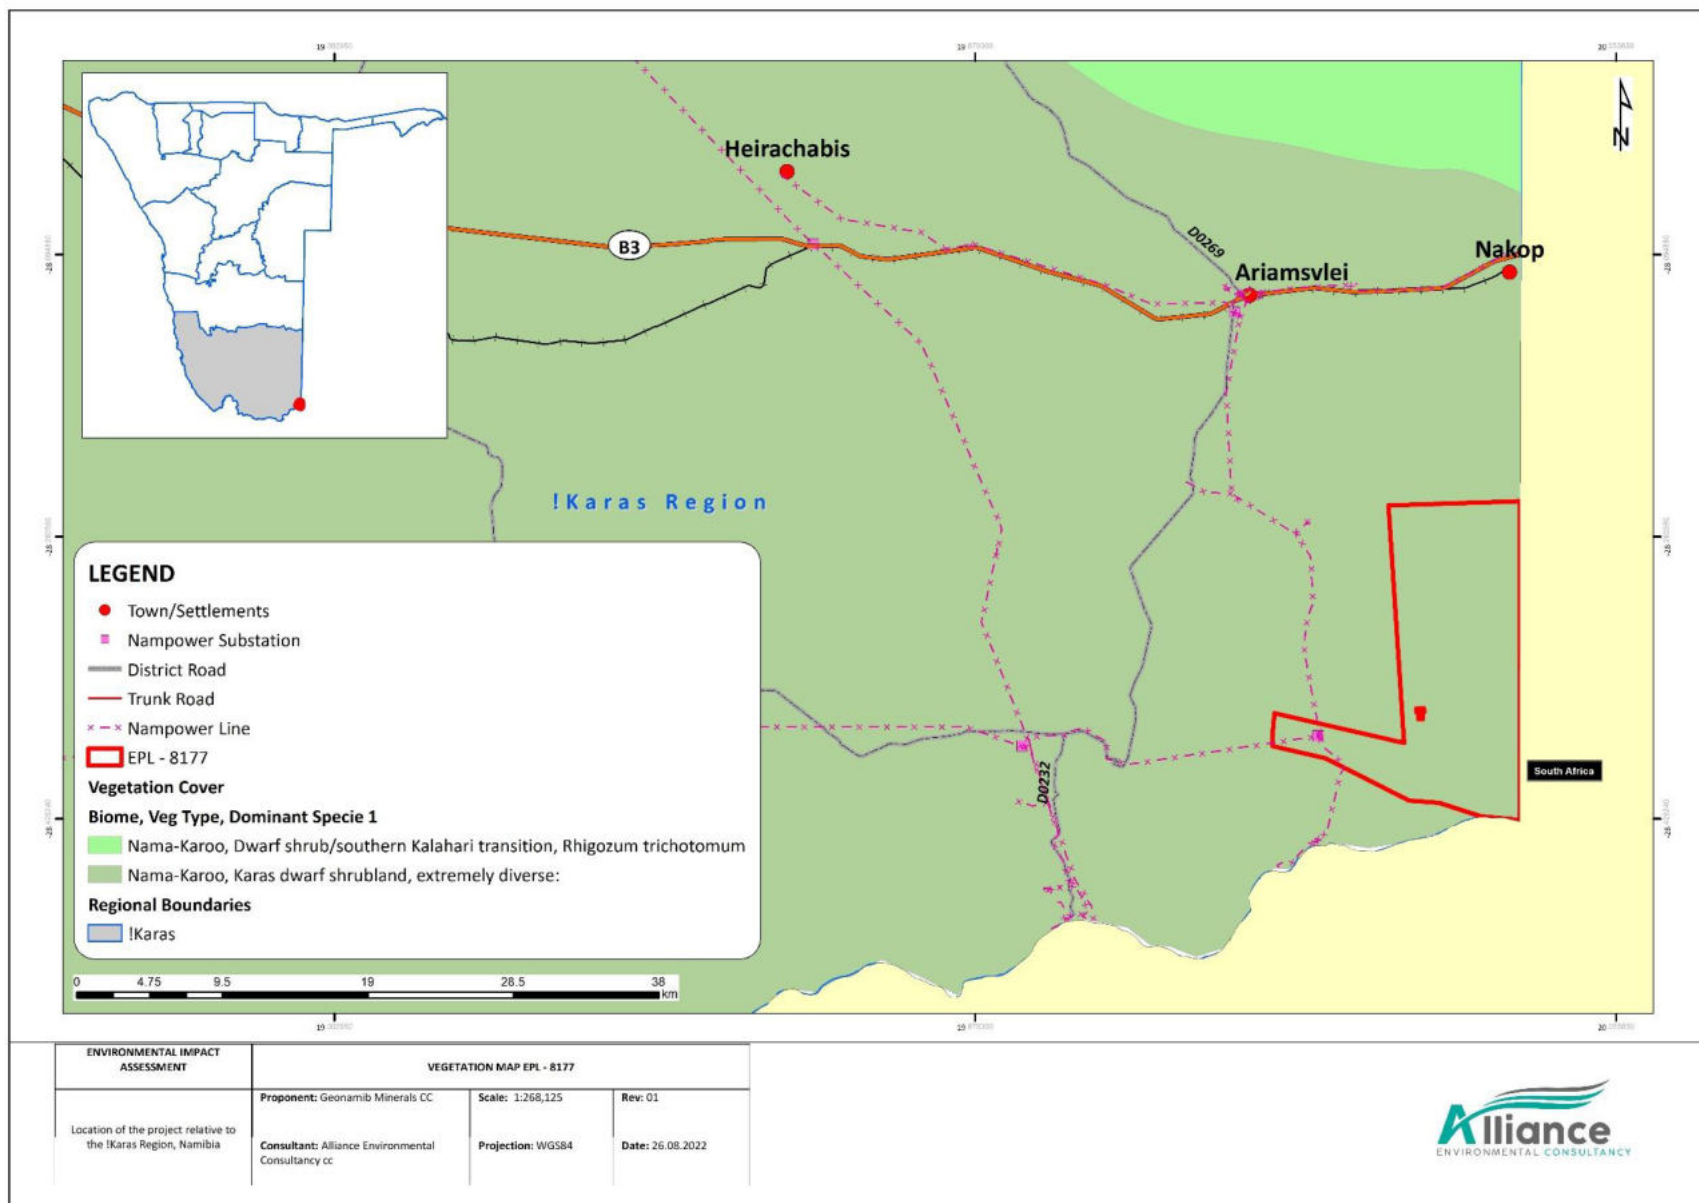


FIGURE 6 - VEGETATION OF THE PROJECT SITE

2. ENVIRONMENTAL MANAGEMENT PRINCIPLES

The Proponent will ensure that all project participants adhere to the following company goals:

- i. All employees will be obliged to undertake activities in an ecologically and socially responsible way. This applies to all consultants, workers, contractors, and subcontractors, as well as transporters, visitors, and anyone else who enters the premises.
- ii. Safeguard the health and safety of project personnel and the public against potential impacts of the project. This includes issues of road safety, precautions against dangers on site, potential hazards; and,
- iii. Promote good relationships with the surrounding settlements and other stakeholders.
- iv. Biophysical Environment
- v. Wise use and conservation of environmental resources, giving due consideration to the use of resources by present and future generations;
 - a. Prevent or minimize environmental impacts;
 - b. Minimize air, water, and soil pollution; and
 - c. Conserve Biodiversity.

In order to achieve the project's goal, the following principles must be followed:

TERM	DESCRIPTION
Accountability and Commitment	The Company Senior Executives and Line managers will be held responsible and accountable for: <ul style="list-style-type: none"> a. Health and safety of site personnel while on duty, b. Environmental impacts caused by exploration activities or by personnel engaged in the daily operations of the site.
Competence	The company will ensure a competent workforce through appropriate selection, training, and awareness of all safety, health, and environmental matters.

TERM	DESCRIPTION
Risk Assessment, Prevention, and Control	Identify, assess and prioritize potential environmental risks. Prevent or minimize risks through careful planning and design, allocation of financial resources, management, and workplace procedures. Intervene promptly in the event of adverse impacts arising.
Performance and Evaluation	Set appropriate objectives and performance indicators. Comply with all laws, regulations, policies, and environmental specifications. Implement regular monitoring and reporting of compliance with these requirements.
Stakeholder Consultation	Create and maintain opportunities for constructive consultations with employees, authorities, and other interested or affected parties. Seek to achieve an open exchange of information and mutual understanding in matters of common concern.
Continual Improvement	Through continual evaluation, reports, and innovation, seek to improve performance with regard to social health and well-being as well as environmental management throughout the lifespan of the project.
Financial Provisions for retail activities	In line with the internationally recognised "polluter pays principle" the company will make the necessary financial provision for compliance with the EMP.

3. ROLES AND RESPONSIBILITIES FOR ENVIRONMENTAL MANAGEMENT

3.1. Communication between Parties

Emphasis will be put towards open communication between all parties, in order to reach a proactive approach towards potential environmental issues deriving from the project. This approach should guarantee that environmental impacts are anticipated and prevented, or minimized, rather than adopting a negative “policing” approach after negative impacts have already occurred.

The importance of a proactive approach cannot be over-emphasized, particularly in relation to preventing unnecessary tracks, and damage to vegetation (i.e., protected and endemic species) as these impacts cannot easily be remedied.

3.2. The Exploration Operating Company

The company is ultimately responsible for all stages of the project and the impacts resulting from those activities. The responsible persons will be the company’s Environmental Control Officer (ECO) and Managing Director to ensure that:

- The EMP and its environmental specifications are included in contractual documents and it is required that contractors, and subcontractors, consultants etc. do meet the EMP requirements;
- The company and all its subcontractors, consultants etc. comply with all Namibian legislation and policies and any relevant International Conventions;
- Compliance with the environmental specifications is enforced on a day-to-day basis;
- Environmental audits are conducted periodically by a suitably qualified ECO to confirm that the environmental requirements are properly understood and effectively implemented;
- Sufficient budget is provided to implement those measures that have cost implications;
- The Site Manager must commission tree surveys well in advance of planned road construction so that the necessary site visits by forestry personnel and forestry permits are acquired; and,
- Open and effective communication is maintained between all parties concerning environmental management on the project.

3.3. Site Managers

Day-to-day responsibility for environmental management will be assigned to the (Environmental Control Officer (ECO) and Manager Field Operations (MFO) for the duration of the project to:

- Be familiar with the contents of the EMP and applicable sections of the EIA and the measures recommended therein;
- Monitor compliance with the environmental specifications on a daily basis and enforce the environmental compliance on-site by communicating the ECO's directions to all personnel involved;
- In the event of any infringements leading to environmental damage, personnel need to consult with the ECO and seek advice on any remedial measures to limit or rectify the damage;
- Maintain a record (photographic and written) of "before-and-after" conditions on site;
- Facilitate communication between all role players in the interests of effective environmental management; and,

3.4. Environmental Control Officer (ECO)

The proponent must appoint a suitably qualified ECO who is responsible to:

- Undertake environmental audits of overall compliance with the environmental specifications. This should be done at least bi-annually for the project area,
- Submit a site inspection report to the Managing Director and MFO;
- Advise the MFO on interpretation and implementation of the environmental specifications as required; and,
- Make recommendations for remedial action in cases of non-compliance with the environmental specifications.
- The report should be submitted to the MEFT periodically at the time interval stipulated by law.

3.5. Contractors

The contractors will have the responsibility to:

- Familiarize themselves with the requirements of the EMP and comply with the environmental specifications within;

- Notify the ECO through the MFO timeously in advance of any actions that might have significant negative impacts. Mitigatory measures should be discussed and implemented before negative impacts arise;
- Conduct or arrange for environmental training for employees and sub-contractors;
- Undertake rehabilitation measures where required as far as possible, rehabilitation measures should be carried out progressively and not left till the end of the project.

4. ENVIRONMENTAL SPECIFICATIONS

4.1. Compliance with the Environmental Specifications

The activities will be conducted in an environmentally and socially responsible manner. The contractor and all personnel on-site will comply with the environmental specifications contained in this section.

4.2. Training and Awareness

All site personnel and site contractors will receive the training to equip them with the necessary knowledge to comply with the environmental specifications. The MFO will ensure that an appropriate level of training is provided at all levels of site personnel.

4.3. Stakeholder Relations

All site personnel will maintain good relations with the landowners and members of the public. Any complaints received by the ECO will be addressed.

4.4. Permits

All relevant permits shall be obtained from relevant authorities.

The removal or relocation of rare and endangered plants will be conserved and should it be removed or relocated it shall be done with the required permits from the Directorate of Forestry.

4.5. Road Safety

The access roads can be dangerous at times due to dust from passing vehicles, poor camber, patches of loose sand, careless drivers and other external factors. All drivers must be aware of these hazards and take precautions to avoid them. Such precautions will include, but not be limited to:

- Complying with speed limits;
- Reducing speed considerably when visibility is poor;
- Being wary of other vehicles
- Travelling with lights on even in daylight;
- Slowing down for animals and birds on the road; and,

- Being cautious of other road users– taking into account reduced visibility due to dust.

4.6. Access Tracks

- No new tracks will be made unless there are no pre-existing tracks, any new tracks or extensions should be established with the permission of the Municipality and other landowners.
- The selected access and site roads will be clearly marked. A single road only will be used to and from each destination. Turning points for vehicles will also be pre-selected and marked. Particular care will be taken to avoid damage to plants.
- Any elevated sites, or sites away from existing tracks, will be accessed on foot rather than by a vehicle.

4.7. Conservation of Biodiversity

- Damage to protected species will be avoided at all costs.

4.8. Wildlife Poaching

NB: It is an offence to poach wildlife.

No animal or bird is to be captured, killed or harmed in any way. Anyone caught violating this law will face suspension from the project and could be liable for prosecution. In a likewise manner, domestic livestock on farms may also not be harmed.

4.9. Soil Management and Erosion Control

- During any excavating and clearing the Contractor shall take care to remove as little topsoil as possible. All soil within 100mm of the cleared surface level shall be regarded as topsoil.
- Remove and separately stockpile any subsoil material that can be used for site backfilling.
- Topsoil shall be stockpiled (and seeded) in areas within the site boundary and approved by the Project Engineer in conjunction with the Environmental Consultant, for reuse and restoration.

- Avoid handling soil when wet as this may result in the loss of soil structure and compaction. Soils should not be handled during windy conditions, which may lead to the loss of soil through wind erosion.
- Soil erosion must be prevented at all times. Where evidence of soil erosion can and/or is taking place, this should be reported by the Contractor to the Project Engineer or Environmental Consultant.
- Unnecessary compaction of construction areas must be prevented, to reduce runoff velocity.
- Suitable erosion measures should be implemented in areas sensitive to erosion such as near water supply points, edges of slopes, etc. These measures could include the use of sandbags, hessian sheets, retention or replacement of vegetation.
- All the necessary precautions in terms of design and construction of earthworks, cuts, and fills must be taken.

4.10. Pollution Control

Should any incidence occur in terms of spilling, the shall report it immediately to the Developer and the Contractor shall be responsible for containing and cleaning up the spillage. The Contractor (Developer) shall ensure that correct mitigation of the pollution is undertaken.

4.10.1. Air pollution / Dust emission

- Excavations and other clearing activities should only be done during permissible weather conditions to avoid drifting of sand and dust into neighboring areas.
- Soil and sand stockpiles shall be located in sheltered areas not exposed to the wind.
- Retention of vegetation where possible will reduce dust travel.
- Exposed surfaces must be re-vegetated as soon as possible.
- The movement of vehicles and other vehicles should be strictly controlled in order to reduce the impact of increased air pollution.
- Adherence to speed limits shall be enforced.
- Sensible and responsible use of equipment which generates dust.
- It is recommended to practice dust monitoring per month in order to take note of the dust emitted at different distances and directions around the project area during operations.

4.10.2. Noise pollution

- Noise levels shall be kept within acceptable limits. All noise and sounds generated shall adhere to SABS 0103 specifications for maximum allowable noise levels for industrial areas.
- Noisy activities must be limited to between 06h00 to 18h00 to avoid disturbance of adjacent landowners.
- Noisy activities should not be allowed on weekends and public holidays unless specific arrangements have been made with the proponent and provided that neighbors have been timeously notified
- Vehicles and operating equipment must be regularly serviced.

4.11. Waste Management

- The area needs to be kept clean, neat, and tidy to the satisfaction of the proponent and ECO. The proponent will provide bins at the worksites and will be responsible for the collection and containment of daily refuse and waste generated by his staff. Bins will be secured in such a way that wind cannot remove papers and plastics. Bins will also be secured against animals around the vicinity.
- No waste will be buried on site. All waste will regularly be removed to an approved waste disposal facility.

4.12. Hazardous Substances

- All containers of fuel, oil, and any other hazardous substances will be kept sealed, and clearly labeled for identification.
- Tanks for fuels, oils, and any other hazardous substances need to be banded to hold 110% of the capacity of the tank to contain any possible spills.
- If any spills occur, clean-up shall occur immediately and disposed of appropriately.

4.13. Fire Prevention

- Ensure an Emergency Response Plan
- No fires are to be left unattended
- Charcoal sourced from farmers should be 100% cured to avoid combustion

- The re burning of charcoal at minimal scale should be conducted during the day on less windy days with full supervision to avoid fly ashes to neighboring land.

4.14. Archaeological Sites

- All archaeological remains are protected under the National Heritage Act (2004) and are not to be destroyed, disturbed, or removed. The Act also requires that any archaeological finds, be reported to the Heritage Council Windhoek (**Tel. 061-244375**). The same applies to rock art sites.
- The ECO will be notified without delay of any archaeological finds.

4.15. Health and Safety

All company personnel will receive a detailed induction upon joining the project and on a regular basis thereafter.

- **Dust:** All staff will receive dust masks and proper PPE to prevent inhalation of potentially charcoal dust while carrying out any dust-producing activities associated with charcoal processing and packaging.
- Eating, drinking, and **smoking** while working with any materials that may contain radioactive or hazardous substances is forbidden. Good personal hygiene is encouraged (e.g., washing hands before eating) to prevent ingestion of potentially hazardous or radioactive materials.
- **Bees:** Bee stings are potentially dangerous to persons who are allergic to them. Bees are attracted to water, so water / liquid should not be left standing.
- **Snakes & Scorpions:** A number of poisonous snake and scorpion species may occur in the area. Therefore, precautions are required which include: -
 - Exercising caution when picking up rocks or equipment from the ground;
 - Looking at the ground when walking; and,
 - Wearing closed shoes and not walking barefoot.

In case of emergency Aspivenin (suction syringe) is permanently available at all workstations for the first aid treatment of snake bites, scorpion stings and bee stings. Antihistamine tablets should also be available for the first aid treatment of allergic reactions to bee stings.

4.16. Work Stoppage

The MFO will have the right to order work to stop in the event of environmental specification infringements that could result in damage to plants, wildlife, or personnel. Work will continue once the situation is rectified and brought to a state of compliance.

In the event of such work stoppage, the Contractor will not be entitled to claim for delays or standing time.

4.17. Compliance Monitoring

During exploration activities, the company ECO will conduct site compliance inspections at least once a month. After each inspection the ECO will compile an EMP compliance report for regular submission to the MFO and biannually to the MEFT or as required.

5. MITIGATION MEASURES

The purpose of the Environmental Management Plan is to provide a detailed plan to mitigate the negative and positive impacts identified in the environmental scoping and assessment report. Furthermore, it aims to provide actions with roles and responsibilities to implement the environmental specifications provided for to the proponent, contractors, subcontractors who will undertake exploration activities.

The following table provides a large-scale summary overview of all the major environmental management aspects. The scoping study submitted with this EMP also provide mitigation measures for impacts identified therein under chapter 12.

Table 1 – EMP Mitigation Measures

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
Access Control	<ul style="list-style-type: none"> • Make use of existing tracks/roads as much as possible throughout the area. • Only drive along the existing tracks and avoid unnecessary drives around the area as it may harm vertebrate fauna and unique flora and may also cause erosion related problems, etc.). • Avoid off-road driving at night as this increases mortality of nocturnal species. • Implement and maintain off-road track discipline with maximum speed limits (30km/h) • Where tracks must be made to potential exploration sites off the main routes, the routes should be selected along already disturbed areas or where there is minimal biodiversity expected to occur. • Avoid placing tracks within drainage lines. Avoid collateral damage (i.e. select routes that do not require the unnecessary removal of trees/shrubs, especially protected species). • Rehabilitate all new tracks created. 	Contractor, Project Manager	On-going
Establishing Storage Areas	<ul style="list-style-type: none"> • Establishment of the supporting exploration infrastructure should be done on an area with the least disturbance to the environment and within the non-sensitive areas. • Choice of location for storage areas must take into consideration prevailing winds, distance to water bodies and general on-site topography. • Storage areas must be designated, demarcated, and fenced if necessary. • Storage areas should be secure to minimize the risk of crime. • They should be safe from access by children and animals etc. 	Contractor, Project Manager	On-going

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<ul style="list-style-type: none"> • Fire prevention facilities must be present at all storage facilities. 		
<p>Establishing Storage Areas</p>	<p><u>Hazardous Material Storage</u></p> <ul style="list-style-type: none"> • Hazardous substances are those that are potentially poisonous, flammable, carcinogenic, or toxic. Some examples are diesel, petroleum, oil, bitumen, cement, solvent-based paints, lubricants, explosives, drilling fluids. • Material safety Data Sheets (MSDSs) shall be readily available on site for all chemicals and hazardous substances to be used on site. Where possible and available, MSDSs should additionally include information on ecological impacts and measures to minimize negative environmental impacts during accidental releases or escapes. • Hazardous storage areas must be 110% banded with an impermeable liner to protect groundwater and soil from contamination. The Contractor shall submit a method statement to the Project Manager for approval. • Storage areas containing hazardous substance materials must be clearly signposted. 	<p>Environmental Control Officer (ECO), Proponent</p>	
<p>Education Of Site Staff on General Environmental Conduct</p>	<p><u>Environmental Education and Awareness</u></p> <ul style="list-style-type: none"> • Ensure that all site personnel have a basic level of environmental awareness training. The proponent must submit a proposal for this training to the ECO for approval. Topics to be covered should include: <ul style="list-style-type: none"> ○ What is meant by “environment”; ○ Why the environment needs to be protected and conserved 	<p>Environmental Control Officer (ECO), Proponent</p>	<p>During staff induction and ongoing</p>

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<ul style="list-style-type: none"> ○ How construction activities can impact on the environment; ○ What can be done to mitigate against such impacts; ○ Awareness of emergency and spills response provisions; ○ Social responsibility during exploration, e.g., being considerate to local residents. <ul style="list-style-type: none"> ● It is the proponent's responsibility to provide the site with no less than 1 hour's environmental training and to ensure that there is sufficient understanding to pass this information onto the anyone operating at the site. ● The need for a 'clean site' policy also needs to be explained to all workers. 		
<p>Education Of Site Staff on General Environmental Conduct</p>	<p><u>Workers Conduct on site</u></p> <ul style="list-style-type: none"> ● A general regard for the social and ecological wellbeing of the site and adjacent areas is expected of the site staff. Workers need to be made aware of the following general rules: ● No alcohol / drugs to be present on site. ● No firearms allowed on site or in vehicles transporting staff to / from site (unless used by security personnel). ● Prevent excessive noise. ● Prevent unsocial behaviour. ● Bringing pets onto the site is forbidden. ● No harvesting of firewood from the site or from the adjacent areas. 	<p>Proponent, Employees, Environmental Control Officer (ECO)</p>	<p>During staff induction and ongoing</p>

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<ul style="list-style-type: none"> • Exploration staff are to make use of the facilities provided for them, as opposed to ad-hoc alternatives, (e.g., fires for cooking, the use of surrounding areas / bush as a toilet is forbidden). • Trespassing on private / commercial properties adjoining the site is forbidden. • Driving under the influence of alcohol is prohibited. • Other than the pre-approved security staff, no workers shall be permitted to live on site. 		
Social Impacts	<ul style="list-style-type: none"> • Avoid exacerbating the influx of unemployed people to the area and address the unrealistic expectations about large numbers of jobs would be created. • Develop a standardized recruitment method for sub-contractor and field workers • The employment of local residents and local companies should be a priority. • Exploration camp if required should be established in close consultation with the landowners. • Exploration camp should consider provision of basic services. • Contract companies could submit a code of conduct, stipulating disciplinary actions where employees are guilty of criminal activities in and around the vicinity of the EPL. Disciplinary actions should be in accordance with Namibian legislation. • Contract companies could implement a no-tolerance policy regarding the use of alcohol and workers should submit to a breathalyser test upon reporting for duty daily. 	Contractor, Project Manager	During staff induction and ongoing

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<ul style="list-style-type: none"> Request that the Roads Authority erect warning signs of heavy exploration vehicles on affected public roads. Ensure that drivers adhere to speed limits and that speed limits are strictly enforced. Ensure that vehicles are road worthy, and drivers are qualified. Train drivers in potential safety issues. 		
Fauna And Flora	<p><u>Fauna and Flora</u></p> <ul style="list-style-type: none"> No protected vegetation may be cleared without prior permission from the forestry department. Care must be taken to avoid the introduction of alien plant species to the site and surrounding areas. Disturbance to birds, animals and reptiles and their habitats should be minimized Wherever possible. Avoid unnecessary affecting areas viewed as important habitat Avoid off-road driving at night as this increases mortality of nocturnal species. Implement and maintain off-road track discipline with maximum speed limits (e.g.30km/h). 	Contractor, Project Manager	Ongoing
Visual	<ul style="list-style-type: none"> Consider the landscape character and the visual impacts of the exploration area including camp site from all relevant viewing angles, particularly from public roads. Use vegetation screening where applicable. Do not cut down vegetation unnecessary around the site and use it for site screening. 	Contractor, Project Manager	Ongoing

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<ul style="list-style-type: none"> • Avoid the use of very high fencing. • Minimise access roads and no off-road that could result in land scarring is allowed. • Minimise the presence of secondary structures: remove inoperative support structures. • Remove all infrastructure and reclaim or rehabilitate the project site after exploration activities are completed. 		
Air Quality	<ul style="list-style-type: none"> • Dust suppression techniques should be employed if the specific operation activity is likely to create dusty atmospheric conditions in excess of the periodic extremes. • Avoid activities that create excessive dust on extremely windy days. • Personnel are required to wear personal protection equipment if excessive dust is created for prolonged working periods. 	Contractor, Project Manager	Ongoing
Noise	<ul style="list-style-type: none"> • A grievance procedure will be established whereby noise complaints can be received, recorded, and responded to appropriately. • Machineries and vehicles (moving and stationed) should be serviced regularly. • A noise management standard operating procedure (SOP) for the activities happening on-site should be developed • Avoid creating unnecessary noise by making sure that equipment that are not in used are always turned off and by avoiding operations during odd hours. • Fit sound mufflers on all machinery where applicable. 	Contractor, Project Manager	Ongoing

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<ul style="list-style-type: none"> Equip employees with proper PPE (noise reduction earmuffs) Employees should work in shifts to avoid prolonged working hours and consequently prolonged exposure to noise. 		
Soil And Groundwater Contamination	<ul style="list-style-type: none"> Accidental spills that occur outside of the bund area must be contained and prevented from entering the stormwater system. Spills must be treated with the appropriate spill absorbent. Any significant spills or leak incidents must be reported in terms of the National Environmental Management Act and the Water Act. 	Contractor, Project Manager	Ongoing
Waste	<ul style="list-style-type: none"> The domestic waste, which is separated from all paper and organic materials, is taken to the nearest official dumpsite. Oil from the servicing of the vehicles and machines is collected in drums and is taken together with all other industrial waste that is generated on site to the nearest hazardous waste site. Storage areas that contain hazardous substances must be banded with an approved impermeable liner. Bins and / or skips shall be provided at convenient intervals for disposal of waste within the exploration site. Bins should have liner bags for efficient control and safe disposal of waste. Recycling and the provision of separate waste receptacles for different types of waste should be encouraged Ensure good housekeeping 	All personnel	Ongoing

Aspect	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<p><u>Ablutions</u></p> <ul style="list-style-type: none"> • Waterless toilets are to be maintained in a clean state and should be moved to ensure that they adequately service the work areas. • The Contractor is to ensure that open areas or the surrounding bush are not being used as a toilet facility. 		
Heritage sites destruction during exploration activities	<ul style="list-style-type: none"> • In addition, where possible, construction and operational activities are to be aligned along previously disturbed areas. Habitats surrounding the washes (rivers) host sensitive plant species which require permits for removal to avoid destruction. No wandering around the site, collecting of plant species or hunting should be allowed. • A 'chance find' of any potential heritage site should be communicated to the police and the National Heritage Council of Namibia. • If activities occur at the location where a 'chance find' has been made, then the activities should cease until the necessary authorities have visited the site and provided the go ahead to proceed with activities • 	Contractor, Project Manager	Ongoing
Rehabilitation	<ul style="list-style-type: none"> • Small samples are preferably removed from site to avoid additional scars in the landscape. • Litter from the site has been taken to the appropriate disposal site. • Debris, scrap metal, etc is removed before moving to a new site or closure of the mine. • Water / Fuel tanks are dismantled and removed if not need for after use. • Tracks on site and the access road are rehabilitated by smoothing the 	Contractor, Project Manager	Progressively and prior ceasing exploration activities

<i>Aspect</i>	MANAGEMENT DETAILS	RESPONSIBLE PERSONS	FREQUENCY
	<p>'middle mannetjie' (middle ridge between the tracks) and raking the surface.</p> <ul style="list-style-type: none"> • if applicable the stockpiled subsoil to be replaced (spread) and/or the site is neatly contoured to establish effective wind supported landscape patterns. • Replace the stored topsoil seed bank layer. 		

6. MONITORING PLAN

The project monitoring is conducted under the EMP includes:

- (i) **Project readiness monitoring** - Monitoring to check progress on project readiness and close gaps through corrective actions.
- (ii) **Environmental quality monitoring** - To be conducted by a competent authority or person appointed by the proponent, involving the collection and analyses of air quality, noise and water quality data at designated monitoring locations for assessing compliance with applicable environmental quality and emission standards.
- (iii) **EMP compliance monitoring** - To be conducted by the Project Management Consultants to verify EMP compliance during project implementation.
- (iv) **Operational monitoring** - This is required as part of the operations of the subproject and will be undertaken by the relevant government department or a nominated private sector operator.

7. CONCLUSION

This Environmental Management Plan highlights the management measures that will be implemented to mitigate the environmental impacts of the proposed activities. Additionally, it highlights the need / requirements for the Environmental Emergency Preparedness and Response procedure.

The EMP is a legal document, which commits the applicant to comply with all management measures, monitoring programmes and other plans as presented herein. As part of the EMP, monitoring programmes have been provided to manage and control critical components of the environment. This is a live document which may be amended if project activities alter.