

UPDATED ENVIRONMENTAL MANAGEMENT PLAN FOR THE RENEWAL OF AN ENVIRONMENTAL CLEARANCE CERTIFICATE FOR EPL 7782, ERONGO REGION


APP NO: 241002004758

Doc Status: FINAL

CONSULTANT	PROPONENT
Impala Environmental consulting Unit 89, Auas Hill Village, Auas Blick, Windhoek Postal Address: P.O Box 29532, Windhoek, Namibia Tel: 061258910/0856630598 eia@impalac.com , www.impalac.com	Blue Sky Mining cc No. 536 Dante street, Prosperita, Windhoek, Namibia P. O. Box 86939, Windhoek, Namibia Tel: +264811600002

Signature consultant:

Signature proponent:



October 2024



Table of Contents

1. Project Background.....	3
1.1 Introduction	3
1.2 Project Location	5
2. Summary of applicable legislation	6
2.1 Environmental Management Act of 2007	6
2.2 The Minerals Prospecting and Mining Act of 1992.....	6
2.3 Water Resources Management Act of 2004	6
2.4 Nature conservation ordinance, ordinance No. 4 of 1975.....	6
2.5 National Heritage Act, 2004 (Act No. 27 of 2004)	7
2.6 Petroleum Products and Energy Act No. 13 of 1990	7
2.7 Forest Act, No. 12 of 2001.....	7
2.8 Atmospheric Pollution Prevention Ordinance (1976)	8
2.9 Hazardous Substance Ordinance, No. 14 of 1974.....	8
2.10 Namibian Water Corporation (Act 12 of 1997)	9
3. Environmental Management Plan.....	10
3.1 Overview	10
3.2 Environmental Management Principles.....	10
3.3 Impacts on the Bio-physical Environment	12
3.3.1 Impacts on Archaeological Sites	12
3.3.2 Impacts on Fauna.....	13
3.3.3 Impacts on Avifauna	13
3.3.4 Impact on Vegetation.....	13
3.3.5 Impacts of Alien Invasive Plants.....	14
3.3.6 Impacts on Socio-Economic.....	14
3.3.7 Visual Impacts	15
3.3.8 Use of Natural Resources	15
3.3.9 Generation of Solid Waste.....	16
3.3.10 Noise.....	16
3.3.11 Air Quality	16
3.4 Summary of Environmental Management Plan during construction,	17
operation and decommissioning phases	17
3.5 Monitoring, Auditing and Reporting	21

3.5.1 Inspections and Audits	21
3.5.2 Environmental Management System Framework	22
4. Conclusion	25
5. References	26

List of Figures

Figure 1 A satellite imagery showing the orientation of the mineral exploration licence.	3
Figure 2 Locality map of the exclusive prospecting licence area	5

1. Project Background

1.1 Introduction

The proponent, Blue Sky Mining cc, was granted an exclusive prospecting licence (EPL 7782) by the Ministry of Mines and Energy. The licence holder intends to explore for industrial minerals (lithium) and dimension stone within the rock units that are found within the vicinity of the area. An outline of the area is shown in the image below.

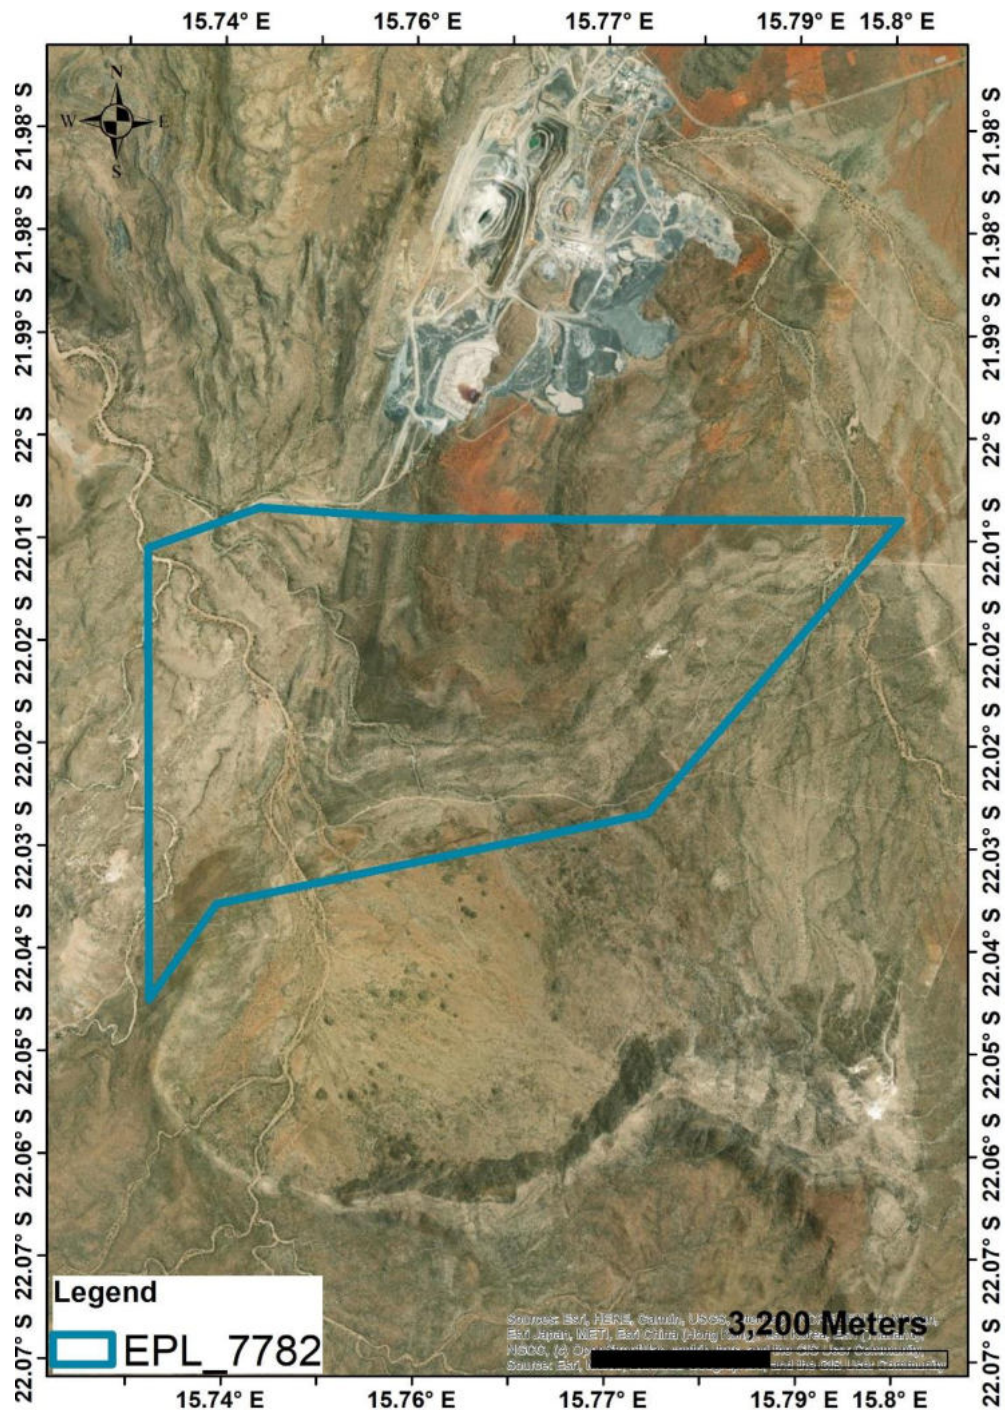


Figure 1 A satellite imagery showing the orientation of the mineral exploration licence.

Although mineral exploration is very costly and risky, environmentally friendly exploration is a cornerstone, yet the mineral exploration process must never be at the expense of people or the environment. The proponent believes that social and environmental responsibility is a prerequisite for providing a conducive environment for mineral exploration and future mining activities.

An environmental impact assessment and environmental management plan (EMP) for the EPL and its operations were completed and an environmental clearance certificate (ECC) was issued by the Ministry of Environment and Tourism. Blue Sky Mining cc requires the renewal of the ECC and has requested Impala Environmental to assist with the process.

1.2 Project Location

The mineral license is located 10 km southwest of Karibib and covers farm Navachab. The coordinates for the centre of the licence are -22.018333 and 15.753331.

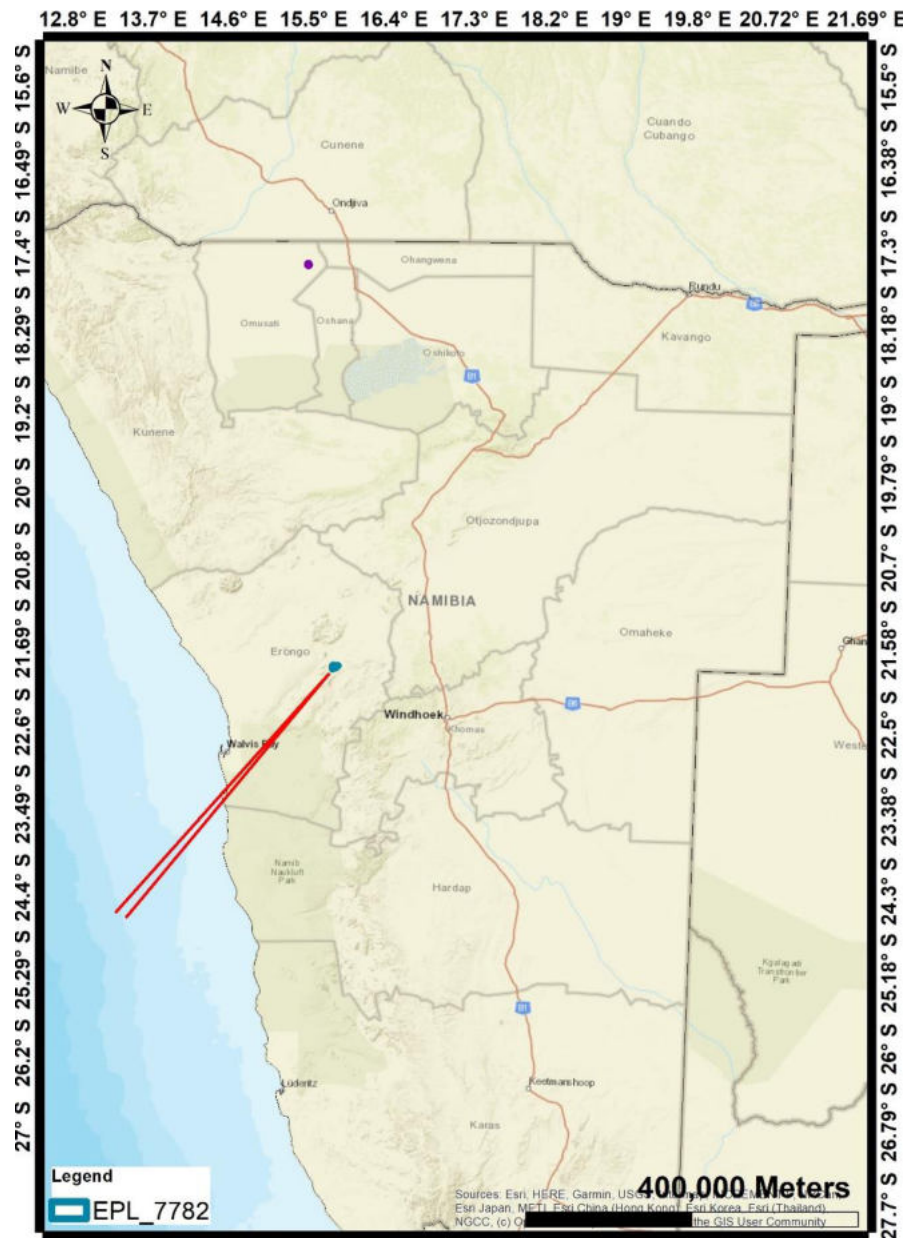


Figure 2 Locality map of the exclusive prospecting licence area .

2. Summary of applicable legislation

All mineral rights, related to mineral exploration activities in Namibia, are regulated by the Ministry of Mines and Energy whereas the environmental regulations are regulated by the Ministry of Environment and Tourism. The acts that affect the implementation, operation and management of mineral exploration activities in Namibia are shown below.

2.1 Environmental Management Act of 2007

Line Ministry: Ministry of Environment and Tourism

The regulations that accompany this act lists several activities that may not be undertaken without an environmental clearance certificate issued in terms of the Act. The act further states that any clearance certificate issued before the commencement of the act (6 February 2012) remains in force for one year. If a person wishes to continue with activities covered by the act, he or she must apply for a new certificate in terms of the Environmental Management Act.

2.2 The Minerals Prospecting and Mining Act of 1992

Line Ministry: Ministry of Mines and Energy

The Minerals Prospecting and Mining Act No.33 of 1992 approves and regulates mineral rights in relation to exploration, reconnaissance, prospecting, small scale mining, mineral exploration, large-scale mining and transfers of mineral licences.

2.3 Water Resources Management Act of 2004

Line Ministry: Ministry of Agriculture, Water and Forestry

The act provides for the management, protection, development, usage and conservation of water resources; to provide for the regulation and monitoring of water resources and to provide for incidental matters.

2.4 Nature conservation ordinance, ordinance No. 4 of 1975

Line Ministry: Ministry of Environment and Tourism

The Nature Ordinance 4 of 1975 covers game parks and nature reserves, the hunting and protection of wild animals (including reptiles and wild birds), problem animals, fish, and the protection of indigenous plants. It also establishes a nature conservation

board. The basic set of regulations under the ordinance is contained in GN 240/1976 (OG 3556). The topics covered in the regulations include tariffs (game parks), regulations relating to game parks, swimming baths, use of boats in game parks, inland fisheries, keeping game and other wild animals in capturing. In addition, the ordinance also regulates game dealers, game skins, protected plants, birds kept in cages, trophy hunting of hunt-able game, hunting at night, export of game and game meat, sea birds, private game parks, nature reserves, regulations of wildlife associations and registers for coyote getters.

2.5 National Heritage Act, 2004 (Act No. 27 of 2004)

Line Ministry/Body: National Heritage Council

The National Heritage Act provides for the protection and conservation of places and objects of heritage significance and the registration of such places and objects; to establish a National Heritage Council; to establish a National Heritage Register; and to provide for incidental matters.

2.6 Petroleum Products and Energy Act No. 13 of 1990

Line Ministry/Body: Ministry of Mines and Energy

The act regulates the importation and usage of petroleum products. The act reads as “To provide measures for the saving of petroleum products and an economy in the cost of the distribution thereof, and for the maintenance of a price thereof; for control of the furnishing of certain information regarding petroleum products; and for the rendering of services of a particular kind, or services of a particular standard; in connection with motor vehicles; for the establishment of the National Energy Fund and for the utilization thereof; for the establishment of the National Energy Council and the functions thereof; for the imposition of levies on fuel; and to provide for matters incidental thereof”.

2.7 Forest Act, No. 12 of 2001

Line Ministry/Body: Ministry of Agriculture, Water and Forestry

The act regulates the cutting down of trees and reads as follows “To provide for the establishment of a Forestry Council and the appointment of certain officials; to consolidate the laws relating to the management and use of forests and forest produce; to provide for the protection of the environment and control and management of forest trees; to repeal the preservation of Bees and Honey proclamation 1923, preservation of Trees and Forests Ordinance, 1952 and the Forest Act, 1968; and to deal with incidental matters”.

The constitution defines the function of the Ombudsman and commits the government to sustainable utilization of Namibia’s natural resources for the benefit of all Namibians and describes the duty to investigate complaints concerning the overutilization of living natural resources for the benefit of all Namibians and describes the duties to investigate complaints concerning the over-utilization of living natural resources, the irrational exploitation of non-renewable resources, the degradation and the destruction of ecosystem and failure to protect the beauty and character of Namibia. Article 95 states that *“the state shall actively promote and maintain the welfare of the people by adopting; inter-alia policies aimed at maintenance of ecosystems, essential ecological processes and biological diversity of Namibia and utilization of natural resources on a sustainable basis for the benefit of all Namibians both present and future”*.

2.8 Atmospheric Pollution Prevention Ordinance (1976)

Line Ministry/Body: Ministry of Health and Social Services

This ordinance provides for the prevention of air pollution and is affected by the Health Act 21 of 1988. Under this ordinance, the entire area of Namibia, with the exception of East Caprivi, is proclaimed as a controlled area for the purposes of section 4(1) (a) of the ordinance.

2.9 Hazardous Substance Ordinance, No. 14 of 1974

Line Ministry/Body: Ministry of Safety and Security

The ordinance provides for the control of toxic substances. It covers manufacture, sale, use, disposal and dumping as well as import and export. Although the environmental

aspects are not explicitly stated, the ordinance provides for the importing, storage and handling.

2.10 Namibian Water Corporation (Act 12 of 1997)

Line Ministry/Body: Namibian Water Corporation

The act caters for water rehabilitation of prospecting and mineral exploration areas, environmental impact assessments and for minimising or preventing pollution.

3. Environmental Management Plan

3.1 Overview

This Environmental Management Plan is intended to give effect to the recommendations of the Environmental Impact Assessment. To achieve this goal, it is essential that all personnel involved on the mineral exploration are fully aware of the environmental issues and the means to avoid or minimize the potential impacts of activities on site. Legal and policy requirements are well known and understood by the proponent, its employees and contractors and will be strictly enforced by its management team.

Environmental management requires a joint effort on the part of all parties involved. The proponent has assigned certain roles to ensure that all players fulfil their responsibilities in this regard.

3.2 Environmental Management Principles

The proponent will ensure that all parties involved in the project uphold the following broad aims:

1. All persons will be required to conduct all their activities in a manner that is environmentally and socially responsible. This includes all consultants, contractors, and sub-contractors, transport drivers, guests and anyone entering the exploration areas in connection with the mineral exploration project.
2. Health, Safety and Social Well Being
 - Safeguard the health and safety of project personnel and the public against potential impacts of the project. This includes issues of road safety, precautions against natural dangers on site, and radiation hazards; and,
 - Promote good relationships with the local authorities and their staff.
3. Biophysical Environment
 - Wise use and conservation of environmental resources, giving due consideration to the use of resources by present and future generations;
 - Prevent or minimise environmental impacts;

-
- Prevent air, water, and soil pollution, Biodiversity conservation and Due respect for the purpose and sanctity of the area.

To achieve these aims, the following principles need to be upheld. **A.**

Commitment and Accountability:

The proponent's senior executives and line managers will be held responsible and accountable for:

Health and safety of site personnel while on duty, including while travelling to and from site in company vehicles and environmental impacts caused by mineral exploration activities or by personnel engaged in the mineral exploration activities, including any recreational activities carried out by personnel in the area

B. Competence

The proponent will ensure a competent work force through appropriate selection, training, and awareness in all safety, health and environmental matters.

C. Risk Assessment, Prevention and Control

Identify, assess and prioritise potential environmental risks. Prevent or minimize priority risks through careful planning and design, allocation of financial resources, management and workplace procedures. Intervene promptly in the event of adverse impacts arising.

D. Performance and Evaluation

Set appropriate objectives and performance indicators. Comply with all laws, regulations, policies and the environmental specifications. Implement regular monitoring and reporting of compliance with these requirements.

E. Stakeholder Consultation

Create and maintain opportunities for constructive consultations with employees, authorities, other interested or affected parties. Seek to achieve open exchange of information and mutual understanding in matters of common concern.

F. Continual Improvement

Through continual evaluation, feedbacks, and innovation, seek to improve performance about social health and well-being and environmental management throughout the lifespan of the mineral exploration project.

G. Financial Provisions for Mineral exploration

In line with Namibia's environmental rehabilitation policy, the proponent will make the necessary financial provision for compliance with the EMP.

3.3 Impacts on the Bio-physical Environment

3.3.1 Impacts on Archaeological Sites

The **nature of impact** is outlined below:

- Potential damage to archaeological sites as a result of vehicle tracks, footprints and actions of contractors, employees and visitors of the mineral exploration site.
- As the mitigation measures below are fully enforced, any impact will be significantly reduced compared to with present situation.

Mitigation Measures to be enforced:

- Buffer zones will be created around the sites.
- Adhere to practical guidelines provided by an archaeologist to reduce the archaeological impact of mineral exploration activities.
- All archaeological sites to be identified and protected before further exploration commences.
- Notices/information boards will be placed on sites.
- Training employees regarding the protection of these sites.

Methods for monitoring:

- An archaeologist will inspect any identified archaeological sites before commencing with the mineral exploration activities.

3.3.2 Impacts on Fauna

The **nature of impact** is outlined below:

- Movement of vehicles in and out of the site.
- Noise produced by moving earth-moving equipment.

Mitigation Measures to be enforced:

- Some habitat areas such as trees of the riverbeds and tunnels outcrops will be avoided wherever possible.
- A fauna survey will be conducted to determine the effect of fragmented habitat on game species should the need arise.
- No animals shall be killed, captured or harmed in any way.
- No foodstuff will be left lying around as these will attract animals which might result in human-animal conflict.
- Care will be taken to ensure that no litter is lying around as these may end up being ingested by wild animals
- No animals shall be fed. This allows animals to lose their natural fear of humans, which may result in dangerous encounters.

Methods for monitoring:

- Regular monitoring of any unusual signs of animal habitat.

3.3.3 Impacts on Avifauna

Birds or Nest sites will not be disturbed by any employee, visitor or contractor.

3.3.4 Impact on Vegetation

The **nature of impact** is outlined below:

- Negative impacts on plants from trenching, compacting and removal of plants.
- Negative Impact from movement of vehicles and the movement of people around the site.
- Negative impacts from land-clearing and mineral exploration operations.

Mitigation Measures to be enforced:

- Environmental considerations will always be adhered to before clearing roads, trenching and excavating.
- Paths and roads will be aligned to avoid root zones. Permeable materials will be used wherever possible.
- The movement of vehicles in riverbeds, rocky outcrops and vegetation sensitive areas will be avoided.
- The movement of vehicles will be restricted to certain tracks only.
- Areas with species of concern will be avoided.
- Ministry of Environment and Tourism will be informed of any protected species which will be transplanted in consultation with MET.

3.3.5 Impacts of Alien Invasive Plants

The **nature of impact** is outlined below:

- Plant or seed material may adhere to car tires or animals
- Seed or plant material may be imported to site in building materials if the source is contaminated.
- Seeds may blow from debris removed at sites.

Mitigation Measures to be enforced:

- The explorer will ensure that debris is properly disposed of.
- Vehicle tyre inspections can be carried out although this may not be a practical mitigation measure.
- Eradicating alien plants by using an Area Management Plan

Methods for monitoring:

- Regular monitoring of any unusual signs of alien species.

3.3.6 Impacts on Socio-Economic

The **nature of impact** is outlined below:

- Impact from loss of grazing for domestic livestock in “exclusive use zone”
- Impacts on cultural and spiritual values.
- Demographic factors: Attraction of additional population that cannot benefit from the project.
- Perception of Health and Safety risks associated with mineral exploration.

Mitigation Measures to be enforced:

- The population change can be mitigated by employing people from the local community and encouraging the contractors to employ local individuals.
- The perception of risks will be mitigated by putting up safety signs wherever possible and ensuring that all employees and visitors to the site undergo a safety induction course.

Methods for monitoring:

- Public meetings will be held by the proponent whenever necessary.

3.3.7 Visual Impacts

The **nature of impact** is outlined below:

- Tracks and damaged vegetation caused by the mineral exploration vehicles.

Mitigation Measures to be enforced:

- Environmental considerations will be adhered to at all times before clearing roads, trenching and excavating.

Methods for monitoring:

- Employees will be trained on the importance of minimizing visual impacts.

3.3.8 Use of Natural Resources

Water and electricity are very scarce in Namibia. During the exploration, best international practices will be considered as a minimum standard for operation. The bulk of the power supply to the exploration site will be sourced from the proponent's

own generator. The proponent will maximize water recycling opportunities wherever possible.

3.3.9 Generation of Solid Waste

Correct management of solid waste will involve a commitment to the full waste life cycle by all the employees and contractors of the site. The Proponent's goal is to avoid the generation of solid waste in the first place and if not possible, to minimize the volumes generated by looking at technologies that promote longevity and recycling of products. Ideally, the proponent should transport solid waste to a registered site for disposal. However, it is not certain if such facilities are available in the area or if they have the capacity to handle large increases in volume. Appropriate on-site facilities will be designed to store large volumes of waste.

3.3.10 Noise

The **nature of impact** is outlined below:

- Movement of people, and vehicles.
- Noise may be generated from an airborne geophysical survey which may be carried out at a later stage.

Mitigation Measures to be enforced:

- Disturbance to fauna that roam the area will be minimized by training the employees on ways to minimize noise.

3.3.11 Air Quality

The **nature of impact** is outlined below:

- Dust from movement of people, vehicles and earth-moving machinery. Emissions from vehicles and drill rigs as well.

Mitigation Measures to be enforced:

- All staff on should be equipped with dosimeters that measure exposure levels to radiation.
- All staff must be made aware of the health risk and obliged to wear dust masks.

3.4 Summary of Environmental Management Plan during construction, operation and decommissioning phases

Construction/Initial Phase			
Environmental Impact	Proposed mitigation measures	Responsibility	Monitoring plan
Air pollution	<ul style="list-style-type: none"> Control speed and operation of construction vehicles. Prohibit idling of vehicles. Maintenance of vehicles and equipment. Sensitize field exploration workers and contractors. Workers should be provided with dust masks if working in sensitive areas. 	<ul style="list-style-type: none"> Contractor Site Manager 	<ul style="list-style-type: none"> Amount of dust produced. Level of Landscaping carried out.
Noise pollution	<ul style="list-style-type: none"> Maintain equipment and vehicles. Field work should only be carried out only during daytime i.e. 08h00 to 17h00. Workers should wear earmuffs if working in noisy section. Management to ensure that noise is kept within reasonable levels. 	<ul style="list-style-type: none"> Contractor Management 	Amount of noise
Solid waste	<ul style="list-style-type: none"> Any debris should be collected by a waste collection company If trenches are dug, waste should be re-used or backfilled. The site should have waste receptacles with bulk storage facilities at convenient points to prevent littering during exploration. 	<ul style="list-style-type: none"> Management 	Presence of well Maintained receptacles and central collection point.
Oil leaks and spills	<ul style="list-style-type: none"> Vehicles and equipment should be well maintained to prevent oil leaks. Contractor should have a designated area where maintenance is carried out and that is protected from rainwater. All oil products should be handled carefully. 	<ul style="list-style-type: none"> Contractor 	No oil spills and leaks on the site
First aid	<ul style="list-style-type: none"> A well-stocked first aid kit shall be maintained by qualified personnel 	<ul style="list-style-type: none"> Management 	Contents of the first aid kit.
Visual	<ul style="list-style-type: none"> Environmental considerations will be adhered to at all times before clearing roads, trenching and excavating. 	<ul style="list-style-type: none"> Management 	<ul style="list-style-type: none"> Employees will be trained on the importance of minimizing visual impacts.
Archaeological Sites	<ul style="list-style-type: none"> Buffer zones will be created around the sites. Adhere to practical guidelines provided by an archaeologist to reduce the archaeological impact of mineral exploration activities. 	<ul style="list-style-type: none"> Management 	<ul style="list-style-type: none"> Register of all archaeological sites identified.
	<ul style="list-style-type: none"> All archaeological sites to be identified and protected before further exploration commences. 		

Occupational Health and Safety	<ul style="list-style-type: none"> • Provide Personal Protective Equipment Train workers on personal safety and how to handle equipment and machines. • A well-stocked first aid kit shall be maintained by qualified personnel. • Report any accidents / incidences and treat and Compensate affected workers. • Provide sufficient and suitable sanitary conveniences which should be kept clean. 	<ul style="list-style-type: none"> • Contractor • Management 	<ul style="list-style-type: none"> • Workers using Protective Equipment. • Presence of Well stocked First Aid Box. • Clean sanitary facilities.
Fauna	<ul style="list-style-type: none"> • Some habitat areas such as trees of the riverbeds and tunnels outcrops will be avoided wherever possible. • A fauna survey will be conducted to determine the effect of fragmented habitat on game species should the need arise. • No animals shall be killed, captured or harmed in any way. • No foodstuff will be left lying around as these will attract animals which might result in humananimal conflict. 	<ul style="list-style-type: none"> • Management 	<ul style="list-style-type: none"> • Regular monitoring of any unusual signs of animal habitat.
Alien Invasive Plants	<ul style="list-style-type: none"> • The explorer will ensure that debris is properly disposed off. • Vehicle tyre inspections can be carried out although this may not be a practical mitigation measure. • Eradicating alien plants by using an Area Management Plan 	<ul style="list-style-type: none"> • Management • Contractor 	<ul style="list-style-type: none"> • Regular monitoring of any unusual signs of alien species.
Loss of vegetation	<ul style="list-style-type: none"> • Environmental considerations will be adhered to at all times before clearing roads, trenching and excavating. • Paths and roads will be aligned to avoid root zones. Permeable materials will be used wherever possible. • The movement of vehicles in riverbeds, rocky outcrops and vegetation sensitive areas will be avoided. • The movement of vehicles will be restricted to certain tracks only. 	<ul style="list-style-type: none"> • Contractor • Management 	<ul style="list-style-type: none"> • Warning signs on site • restored vegetation
Operational Phase			
Environmental/ Social Impact	Proposed mitigation measures	Responsibility	Monitoring plan
Noise pollution	<ul style="list-style-type: none"> • Maintain vehicles and drilling equipment. • Exploration drilling should be carried out only during daytime. • Workers to wear earmuffs if working in noisy section • Management to ensure that noise is kept within reasonable levels. 	<ul style="list-style-type: none"> • Contractor • Management 	<ul style="list-style-type: none"> • Amount of noise
Visual	<ul style="list-style-type: none"> • Environmental considerations will be adhered to at all times before clearing roads, trenching and excavating. 	<ul style="list-style-type: none"> • Management 	<ul style="list-style-type: none"> • Employees will be trained on the importance of minimising visual impacts.

Fauna	<ul style="list-style-type: none"> Some habitat areas such as trees of the riverbeds and tunnels outcrops will be avoided wherever possible. A fauna survey will be conducted to determine the effect of fragmented habitat on game species should the need arise. No animals shall be killed, captured or harmed in any way. No foodstuff will be left lying around as these will attract animals which might result in humananimal conflict. 	<ul style="list-style-type: none"> Management 	<ul style="list-style-type: none"> Regular monitoring of any unusual signs of animal habitat.
Alien Invasive Plants	<ul style="list-style-type: none"> The explorer will ensure that debris is properly disposed of. Vehicle tyre inspections can be carried out although this may not be a practical mitigation measure. Eradicating alien plants by using an Area Management Plan 	<ul style="list-style-type: none"> Management Contractor 	<ul style="list-style-type: none"> Regular monitoring of any unusual signs of alien species.
Loss of vegetation	<ul style="list-style-type: none"> Environmental considerations will be adhered to at all times before clearing roads, trenching and excavating. Paths and roads will be aligned to avoid root zones. Permeable materials will be used wherever possible. The movement of vehicles in riverbeds, rocky outcrops and vegetation sensitive areas will be avoided. The movement of vehicles will be restricted to certain tracks only. 	<ul style="list-style-type: none"> Contractor Management 	<ul style="list-style-type: none"> Warning signs on site restored vegetation
Solid waste	<ul style="list-style-type: none"> Minimize solid waste generated on site. Recycle waste especially waste from trenching. Debris should be collected by waste collection company. Excavation waste should be re-used or backfilled. 	<ul style="list-style-type: none"> Contractor Management 	<ul style="list-style-type: none"> Amount of waste on Site Presence of wellMaintained receptacles and central collection point.
Oil leaks and spills	<ul style="list-style-type: none"> Machinery should be well maintained to prevent oil leaks. Contractor should have a designated area where maintenance is carried out and that is protected from rainwater. All oil products should be stored in a site store and handled carefully. 	<ul style="list-style-type: none"> Contractor 	<ul style="list-style-type: none"> No oil spills and leaks on the site.
Archaeological Sites	<ul style="list-style-type: none"> Buffer zones will be created around the sites. Adhere to practical guidelines provided by an archaeologist to reduce the archaeological impact of mineral exploration activities. All archaeological sites to be identified and protected before further exploration commences. 	<ul style="list-style-type: none"> Management 	<ul style="list-style-type: none"> Update Register of all archaeological sites identified.
First aid	<ul style="list-style-type: none"> A well-stocked first aid kit shall be maintained by qualified personnel 	<ul style="list-style-type: none"> Management 	<ul style="list-style-type: none"> Contents of the first aid kit.

Fire preparedness	<ul style="list-style-type: none"> • Firefighting drills carried out regularly. • Firefighting emergency response plan. Ensure all firefighting equipment are regularly maintained, serviced and inspected. 	• Management	<ul style="list-style-type: none"> • Number of fire drills carried. • Proof of inspection on firefighting equipment.
	<ul style="list-style-type: none"> • Fire hazard signs and directions to emergency exit, route to follow and assembly point in case of any fire incidence. 		<ul style="list-style-type: none"> • Fire Signs put up in strategic places. • Availability of firefighting equipment.
Environment Health and Safety	<ul style="list-style-type: none"> • Train workers on personal safety and disaster preparedness. • A well-stocked first aid kit shall be maintained by qualified personnel. • Report any accidents / incidences and treat and compensate affected workers. • Provide sufficient and suitable sanitary conveniences which should be kept clean. • Conduct Annual Health and Safety Audits. 	• Management	<ul style="list-style-type: none"> • Provide sanitary facilities. • Copies of Annual Audit
Decommissioning Phase			
Environmental/ Social Impact	Proposed mitigation measures	Responsibility	Monitoring plan/indicator
Noise & Air pollution	<ul style="list-style-type: none"> • Maintain plant equipment. • Decommissioning works to be carried out only during daytime. • Workers working in noisy section to wear earmuffs. • Workers should be provided with dust masks. 	• Contractor • Management	<ul style="list-style-type: none"> • Amount of noise
Disturbed Physical environment	<ul style="list-style-type: none"> • Undertake a complete environmental restoration programme and introducing appropriate vegetation 	• Management	
Solid waste	<ul style="list-style-type: none"> • Solid waste should be collected by a contracted waste collection company • Excavation waste should be re-used or backfilled. 	• Contractor • Management	<ul style="list-style-type: none"> • Amount of waste on Site. • Presence of wellmaintained receptacles and central collection point.
Occupational Health and Safety	<ul style="list-style-type: none"> • Provide Personal Protective Equipment. • Train workers on personal safety and how to handle equipment and machines. • A well-stocked first aid kit shall be maintained by qualified personnel. • Demarcate area under decommissioning. 	• Contractor	<ul style="list-style-type: none"> • Workers using Protective Equipment. • Presence of a First Aid Box.

3.5 Monitoring, Auditing and Reporting

3.5.1 Inspections and Audits

During the life of the project, performance against the EMP commitments will need to be monitored, and corrective action taken where necessary, in order to ensure compliance with the EMP and relevant enviro-legal requirements.

3.5.1.1 Internal Inspections/Audits

The following internal compliance monitoring programme will be implemented:

1. Project kick-off and close-out audits will be conducted on all contractors. This applies to all phases, including drilling contract work during operations:
 - Prior to a contractor beginning work, an audit will be conducted by the applicable phase site manager to ensure that the EMP commitments are included in Contractors' standard operating procedures (SOPs) and method statements.
 - Following completion of a Contractors work, a final close-out audit of the contractor's performance against the EMP commitments will be conducted by the applicable phase site manager.
2. Monthly internal EMP performance audits will be conducted during the construction/initial and decommissioning phases.
3. Ad hoc internal inspections can be implemented by the applicable phase exploration manager at his/her discretion, or in follow-up to recommendations from previous inspection/audit findings.

3.5.1.2 External Audits

- At the close of each project phase, and annually during the operational phase, an independently conducted audit of EMP performance will be conducted.
- Specialist monitoring/auditing may be required where specialist expertise are required or in order to respond to grievances or authorities directives.
- Officials from the DEA may at any time conduct a compliance and/or performance inspection of mineral exploration operations. The proponent will be provided with a written report of the findings of the inspection. These audits

assist with the continual improvement of the exploration project and the proponent will use such feedback to help improve its overall operations.

3.5.1.3 Documentation

Records of all inspections/audits and monitoring reports will be kept in line with legislation. Actions will be issued on inspection/audit findings. These will be tracked and closed out.

3.5.1.4 Reporting

Environmental compliance reports will be submitted to the Ministry of Environment and Tourism on a bi-annual basis.

3.5.2 Environmental Management System Framework

In order implement Environmental Management Practices, an Environmental Management System (EMS) will be established and implemented by the proponent and their Contractors. This subchapter establishes the framework for the compilation of a project EMS. The applicable exploration manager will maintain a paper based and/or electronic system of all environmental management documentation. These will be divided into the following main categories:

3.5.2.1 Policy and Performance Standards

A draft environmental policy and associated objective, goals and commitments has been included in the EMP. The mineral explorer may adapt these as necessary.

3.5.2.2 Enviro-Legal Documentation

A copy of the approved EMP documentation will always be made available by the proponent. Copies of the Environment Clearance Certificate and all other associated authorisations and permits will also be kept with the exploration team. In addition, a register of the legislation and regulations applicable to the project will be maintained and updated as necessary.

3.5.2.3 Impact Aspect Register

A register of all project aspects that could impact the environment, including an assessment of these impacts and relevant management measures, is to be maintained. This Draft EMP identifies the foreseeable project aspects and related

potential impacts of the proposed project, and as such forms the basis for the Aspect-Impact Register; with the Project Activity. It is however noted that during the life of the project additional project aspects and related impacts may arise which would need to be captured in the Aspect-Impact Register. In this regard, the impact identification principles set forth in the scoping report can be used to update the Register. This method can be modified as required by the applicable exploration manager as necessary during the life of the project.

3.5.2.4 Procedures and Method Statements

In order to affect the commitments contained in this EMP, procedures and method statements will be drafted by the relevant responsible mineral exploration staff and Contractors. These include, but may not be limited:

- Standard operating procedures for environmental action plan and management programme execution.
- Incident and emergency response procedures.
- Auditing, monitoring and reporting procedures, and
- Method statements for EMP compliance for ad hoc activities not directly addressed in the EMP action plans.

All procedures are to be version controlled and signed off by the applicable exploration manager. In addition, knowledge of procedures by relevant staff responsible for the execution thereof must be demonstrable and training records maintained.

3.5.2.5 Register of Roles and Responsibilities

During project planning and risk assessments, relevant roles and responsibilities will be determined. These must be documented in a register of all environmental commitment roles and responsibilities. The register is to include relevant contact details and must be updated as required.

3.5.2.6 Site Map

An up to date map of the exploration site indicating all project activities is to be maintained. In addition to the project layout, the following detail must be depicted:

- Materials handling and storage;

-
- Waste management areas (collection, storage, transfer, etc.);
 - Sensitive areas;
 - Incident and emergency equipment locations; and Location of responsible parties.

3.5.2.7 Environmental Management Schedule

A schedule of environmental management actions is to be maintained by the applicable phase site managers and/or relevant Contractors. A master schedule of all such activities is to be kept up to date by the exploration manager. Scheduled environmental actions can include, but are not limited to:

- Environmental risk assessment;
- Environmental management meetings;
- Soil handling, management and rehabilitation;
- Waste collection
- Incident and emergency response equipment evaluations and maintenance
- Environmental training;
- Stakeholder engagement; Environmental inspections; and
- Auditing, monitoring and reporting.

3.5.2.8 Change Management

The EMS must have a procedure in place for change management. In this regard, updating and revision of environmental documentation, of procedures and method statements, actions plants etc. will be conducted as necessary in order to account for the following scenarios:

- Changes to standard operating procedures (SOPs);
- Changes in scope;
- Ad hoc actions;
- Changes in project phase; and
- Changes in responsibilities or roles

All documentation will be version controlled and require sign off by the applicable phase site managers.

4. Conclusion

The updated environmental management plan is prepared for mineral exploration activities on an area which is located 10 km southwest of Karibib and covers farm Navachab. The review of the Environmental Management Plan found it practical and efficient towards the improvement of environmental sustainability.

Basically, mineral exploration is relatively unsophisticated and rudimentary. The methods that will be employed are mainly target generation, target drilling, resource evaluation and mineral resource definition.

With the potential employment of 35 people, this means that 35 families will benefit from the project during the exploration phase. The project has great potential to improve livelihoods and contribute to sustainable development within the surrounding community.

The EMP contains a set of Environmental Specifications that will form part of all contracts between the proponent and contractors such as drilling companies. The requirements of the EMP will be enforced on site by the Management team, and periodic environmental audits will be undertaken and submitted to MET.

5. References

- Brown, C. & Lawson, J., 1989. *Birds and electricity transmission lines in South West Africa/Namibia*, Windhoek: Madoqua.
- Burke, A., 2003. *Floristic relationship between inselbergs and mountain habitats in the Central Namib.*, s.l.: Dinteria.
- Calcutt, V., 2001. *Introduction to Copper: Mining & Extraction*, s.l.: Copper Development Association.
- Griffin, E., 1998. *Species richness and biogeography of non-acarine arachnids in Namibia*, Windhoek: Biodiversity and Conservation.
- Hoffmann, K., 1989. *New aspects of lithostratigraphic subdivision and correlation of late Proterozoic to early Cambrian rocks of the southern Damara Belt and their correlation with the central and northern Damara Belt and the Gariiep Belt*, Windhoek: Communs geol. Surv. Namibia.
- Kisters, A., 2008. *Introduction to the Damara Orogen*, Windhoek: Isotope Geology of Namibia.
- Mendelsohn, J., Jarvis, A., Roberts, C. & Robertson, T., 2002. *Atlas of Namibia: a portrait of the land and its people*, Cape Town: David Philip.
- Mentes, H., 2012. *Design and Development of a Mineral Exploration Ontology*, Georgia: Georgia State University.
- Miller, R., 1992. *The mineral resources of Namibia*. Windhoek: Geological Survey of Namibia, Ministry of Mines & Energy. p2.3-93-96.
- Miller, R., 2008. *The geology of Namibia*. Windhoek: Geological survey of Namibia, Ministry of Mines & Energy.
- Schneider, G. & Seeger, K., 1992. Copper. In: s.l.:The Mineral Resources of Namibia, pp. 2.3, 1-172.
- Simmons, R. & Komen, L., 2003. *Pussyfooting Around*, s.l.: Africa Geographic.