2025

OPERATION AND MAINTENANCE OF AN EXISTING 22kV HARIB - SCHONAU DISTRIBUTION LINE.



This document is prepared by:

Namibia Power Corporation (Proprietary) Limited
NamPower Center 15 Luther Street, Windhoek
P.O. Box 2864, Windhoek, Namibia
Tel: +264 (61) 205 4111
January 2025



TABLE OF CONTENTS

1	LIST OF TERMS, ACRONYMS AND ABBREVIATIONS	3
2	INTRODUCTION	4
3.	GENERAL AREA DESCRIPTION	5
3 P	OBJECTIVES AND SCOPE OF THIS ENVIRONMENTAL MANAGEMENT AN (EMP)	
4	POLICY AND LEGISLATIVE FRAMEWORK1	0
5	ROLES AND RESPONSIBILITIES1	4
6 A	DESCRIPTION OF OPERATIONAL ACTIVITIES TO BE UNDERTAKEN D ASSOCIATED IMPACTS1	6
7	MANAGEMENT AND MITIGATION MEASURES1	8
8	REPORTING, MONONITORING AND AUDITING2	9
9	NON-COMPLIANCE AND CONFLICT MANAGEMENT PROCEDURES 2	9
1(RECORD KEEPING2	9
1	CONCLUSION3	0
12	REFERENCES3	0
	Annexure 1: Areas of importance and protected species3	1
	Annexure 2: Protection of Ecology & Vegetation3	3
	Annexure 3: Landowner permission form3	4
	Annexure 4: Chance find procedure3	6

1 LIST OF TERMS, ACRONYMS AND ABBREVIATIONS

APD Anti-Perching Devices

BFD Bird Flight Diverters

EAP Environmental Assessment Practitioner

ECC Environmental Clearance Certificate
EIA Environmental Impact Assessment

EMA Environmental Management Act no 7 of 2007

EMP Environmental Management Plan
GIS Geographical Information System

HIV/AIDS Human immunodeficiency virus/ acquired immunodeficiency

syndrome

MEFT Ministry of Environment, Forest and Tourism

NHC National Heritage Council

REDs Regional Electricity Distributors
SAPP Southern African Power Pool

SHE Safety, Health and Environment

SHEW Safety, Health, Environment and Wellness

kV Kilovolt

2 INTRODUCTION

NamPower's core business is the generation, transmission and energy trading, which takes place within the Southern African Power Pool (SAPP), the largest multilateral energy platform on the African continent. NamPower supplies bulk electricity to Regional Electricity Distributors (REDs), Mines, Farms and Local Authorities (where REDs are not operational) throughout Namibia. To carry out its mandate of transmission and distribution of electricity, NamPower's has a transmission network across all regions countrywide as well as distribution networks in areas where there are no regional electricity distribution companies. The continuous operation of the transmission and distribution networks allow NamPower to provide uninterrupted supply of electricity to regions to improve the living conditions of Namibian citizens and to enable economic development. The 22kV Harib – Schonau distribution line is part of this network, and it supplies electricity to Schonau farmstead in Warmbad area.

The 22kV Harib - Schonau power line starts from Harib Substation and runs north-eastwards to Schonau in Warmbad area, //Karas region. This line 9.3 km in length and is constructed with wooden pole structures. Figure 1 below shows the locality map for this distribution line.

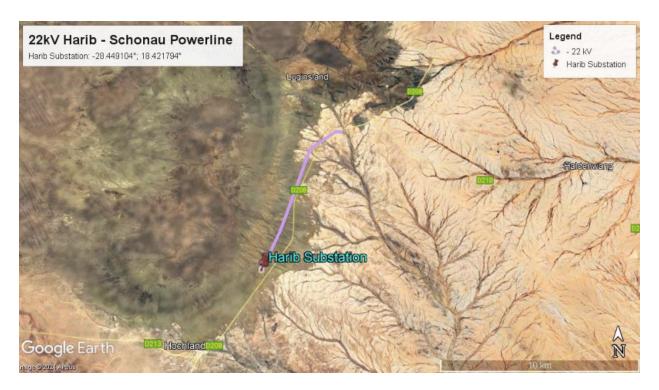


Figure 1: Locality map showing the 22kV Harib-Schonau distribution line



Figure 2: The 22kV Harib – Schonau distribution line with wooden structures.

3. GENERAL AREA DESCRIPTION

The 22kV Harib - Schonau distribution line falls within the vegetation type known as the Dwarf Shrub Savannah or Karas Dwarf Shrubland, (Cunningham, 2021). The 22kV Harib - Schonau route passes through freehold farmland and is moderately impacted by various anthropogenic activities such as transmission line, roads/tracks, fences and other farm infrastructure, making it not a pristine habitat. The entire route beneath the line is relatively well vegetated and comprises of gravel/rocky terrain with ephemeral drainage lines. The dominant species are *Phaeoptilum spinosum* and *Stipagrostis* spp. grasses with the most important species encountered along the route being a patch of *Vachellia erioloba* (camel thorn) individuals associated with an ephemeral drainage line, (Cunningham, 2021).

The route passes through 1 "hotspot" area classified as "high" sensitivity with potential high biodiversity. Along the 22kV Harib - Schonau section, 3.6% of the route is classified as "high" sensitivity and 96.4% of the route as" low" sensitivity. Ephermeral drainage lines and Schonau farmstead are viewed as the most important areas. Figure 2-7 show the sensitive areas and some of the protected plant species found along and in the vicinity of the line servitude.



Figure 2. *Phaeoptilum spinosum* shrubs and *Stipagrostis* spp. grasses are the dominant species along this route.



Figure 3. A patch of *Vachellia erioloba* (camel thorn) associated with a small ephemeral drainage line.



Figure 4. The Harib-Schonau line ends at the Farm Schonau farmstead.



Figure 5. The Harib Substation can be viewed in the background.



Figure 6. A patch of large *Vachellia erioloba* (camel thorn) observed along an ephemeral drainage line is viewed as the most important species (and habitat) along this route.



Figure 7. The invasive alien *Prosopis* spp. (mesquite spp.) was observed close to the Schonau farmstead (See arrow).

3 OBJECTIVES AND SCOPE OF THIS ENVIRONMENTAL MANAGEMENT PLAN (EMP)

The operation of this powerline can have a negative impact on the receiving environment. However, the impacts are limited to the line servitude. It is thus important that good management measures are implemented to ensure that environmental damage is minimized. This Environmental Management Plan (EMP) seeks to manage and keep to a minimum the negative impacts associated with this powerline and at the same time enhance the positive and beneficial impacts.

The scope of this EMP includes all activities associated with the operation of the powerline. It is necessary to highlight that the EMP is a living document that should be periodically reviewed and updated. It should also be noted that the EMP should be read in conjunction with laws and regulations outlined in section 5, Table 1, and all other applicable laws.

The aim of this EMP is to detail the management actions required to implement the mitigation measures identified thereby ensuring that any operational phase activity is conducted in a manner that takes cognizance of environmental protection and is in line with National legislation.

This EMP has the following objectives:

- To outline mitigation measures to be implemented during the operation phase, to manage and minimize the extent of environmental impacts.
- Minimize negative impacts and enhance positive impacts associated with the operations.
- To ensure that the operational activities do not result in undue or reasonably avoidable adverse environmental impacts and ensure that any potential environmental benefits are enhanced.
- To identify key personnel who will be responsible for the implementation of the measures, outline functions and responsibilities.
- To propose mechanisms for monitoring compliance and preventing long term or permanent environmental degradation.
- To ensure that the concerns and complaints of Interested and Affected Parties (I&APs) with regards to the operational activities are addressed effectively and timely.

• Ensure compliance to legislative requirements.

4 POLICY AND LEGISLATIVE FRAMEWORK

The key legislative requirements which are applicable to the operational and maintenance activities include but not limited to the ones listed on table 1 below. The outlined legislations must be read in full for clear understanding in addition to the summary provided in the table.

Table 1 The legislative requirements which are applicable to the operational and maintenance activities

Legislation:	Section (s)	(s) Implications:	
	applicable:		
Environmental Management Act no 7 of 2007	Section 3	 All activities performed should be in line with the following principles: Interested and affected parties should have an opportunity to participate in decision making. Listed activities should be subject to an EIA. Polluters should pay for rehabilitation. Pollution should be minimized. Environmental assessments should be conducted for listed activities. The proposed activity can be classified under the following range of activities: 	
	Section 27		
	Section 33 onwards And all other applicable sections.	 Generation of electricity Transmission of electricity These sections detail the process to be followed to obtain a clearance certificate. All existing listed activities must obtain a 	

EMA Regulations GN 28-30 (GG 4878) (February 2012) No. 156 Labour Act, 1992: Regulations relating to the	 Listed activity: 5.1 6 - 9; 13; 15; 21 -24 Any other applicable sections All applicable regulations	clearance certificate within one year of the law coming into effect. Therefore, all existing activities which can be considered a listed activity should apply for clearance. This activity can be considered as electricity generation and transmission. These sections detail the process to be followed in terms of producing an Environmental Assessment and this process should be adhered to during the generation of information for this document. All regulations applicable to different activities must be complied with
Regulations relating to the	regulations	be complied with.
health and safety of		
employees at work.		
Labour Act no 11 of 2007	 Section 3 Section 4 Section 9 Section 39 – 42 All other applicable sections 	 Children under the age of 16 may not be employed. Forced labour may not be used. Basic conditions of employment as stipulated by the law must be met. The employer shall ensure the health and safety of all employees and non-employees on site. Employees must fulfil their duties to ensure their own health and safety and that of other employees and people. Employees may leave the workplace if reasonable measures to protect their health are not taken.
Electricity Act no 4 of 2007	Section 33	Installations used for the provision of electricity should be operated with due compliance with the requirements of laws relating to health, safety, and environmental standards.

		Therefore – any company involved within the Electricity Supply Industry must adhere to the
		laws covering the previously stated aspects or stand to lose their licenses to operate.
Public and Environmental Health Act no 1 of 2015	 Section 52 Section 53 All other sections applicable to different activities. 	 A person generating waste must ensure that the waste generated is kept and stored under conditions that cause no harm to human health or damage to the environment. Waste must only be disposed of at a waste disposal site, including an incinerator approved by the local authority concerned.
Water Resources Management Act no 24 of 2013	 Section 89 All other sections applicable to different activities. 	The owner or occupier or other person in control of land where an incident that causes or is likely to cause a water resource to be polluted must take all reasonable measures to contain and minimize the effects of the incident; and to clean up polluted areas and remedy the effects of the incident.
Hazardous Substances Ordinance 14 of 1974	 Section 27 All other sections applicable to different activities. 	To provide for the control of substances which may cause injury or ill-health to or death of human beings, by reason of their toxic, corrosive, irritant, strongly sensitizing or flammable nature or the generation of pressure thereby in certain circumstances.
		To provide for the division of such substances into groups in relation to the degree of danger.
		To provide for the prohibition and control of importation, manufacture, sale, use, operation, application, modification, disposal or dumping of such substances; and
		To provide for matters connected therewith.

Fertilizers, farm feeds, agricultural remedies and stock remedies Act no 36 of 1947	 Definitions Section 7 Section 10 All other sections applicable to different activities. 	 Arborocides application is defined as an agricultural remedy under this Act. Only registered pesticides may be used. May only buy herbicides in a container that complies with the prescribed requirements and is sealed and labelled. Only allowed to use herbicides in the prescribed manner. Landowners must be notified about applications, and the following information must be supplied: Purpose of administration Registered name and number of the product Precautions to be taken before, during and after each administration.
The Nature Conservation Ordinance (1975) as amended through the Nature Conservation Amendment Act of 1996.	 Chapter 11: Game Parks, Nature Reserves, Conservancies and Wildlife Councils 	 Permits are required to enter the National Park. Permits are also required for the removal of any protected plant or tree. It also stipulates that no damage may be done to any object of geological, ethnological, archaeological, historical, or other scientific interest without the appropriate permits.
National Heritage Act No 27 of 2004	 Section: 46, 48, 55 All other sections applicable to different activities. 	 All heritage resources are to be identified and either protected or removed/mitigated with a permit from the National Monuments Council before any development may take place. A chance find procedure should be followed in case of discovery of a heritage resource.

Soil Conservation Act no	Section 4	Institutions may be ordered by the relevant
76 of 1969	Section 13	Minister to construct soil conservation works when and where necessary.
	 Section 21 And other applicable sections 	 Fire protection schemes may be implemented to regulate the prohibition of veld burning as well as the prevention, control and extinguishing of veld and forest fires. It is illegal to damage, destroy / fail to maintain any soil conservation works; fire belts; works constructed in terms of a fire protection scheme.
Forest Act no 12 of 2001	 Section 66 Section 41 And other applicable sections 	 Vegetation may not be removed within 100 m of a river, stream, or water course. A person shall be liable for damage caused by any fire which arises because of activities conducted on site without having taken reasonable measures to prevent a fire.

5 ROLES AND RESPONSIBILITIES

It is the responsibility of NamPower and/or contractor to ensure that all the environmental management actions are conducted effectively and timeously. It is important to note that the successful implementation of the EMP is, however, dependent on clearly defined roles and responsibilities by several stakeholders. Below are the key employees that are responsible for the management of environmental and social issues during the operational phase:

Table 2: The roles and responsibilities for operational and maintenance activities:

Responsible person	Responsibilities
The Area Superintendent	 Is responsible for the enforcement of the EMP.

	 To ensure that environmental requirements are adequately covered in any external service provider contracts.
	 To ensure that SHE requirements are included in the tender documents sent to the contractors. A copy of this EMP should also form part of the tender documents.
	 To ensure that corrective actions are implemented for non- compliances.
	 To ensure that appropriate records and information regarding compliance with environmental requirements are maintained.
	 To ensure that the line remain in compliance with the requirements of this EMP, through regular communication and monitoring.
	 To ensure that all incidents, accidents, and complaints are reported. To also ensure that incidents and accidents are investigated to prevent re-occurrence.
Project Manager	Is responsible for the enforcement of the EMP.
	 To ensure that SHE requirements are included in the tender documents sent to the contractors.
	 Must ensure that the contractor/NamPower Team remain in compliance with the requirements of this EMP throughout the project.
NamPower SHEW	 To ensure that all requirements with regards to this EMP are fulfilled.
	 Communicate NamPower SHEW requirement to the contractors and NamPower employees.
	 Provides SHEW inductions to NamPower and contractor employees.
	Implement monitoring, conduct inspections and audits in

	consultation with the Project Manager/Area Superintendent.
	 Document and communicate monitoring, audit and inspection findings to project manager and area superintendent.
	 Communicate the final inspection report to the Project manager on project team compliance to the EMP before the project close-off and final payment is made to the contractor.
Contractor	Is responsible for the implementation of the EMP.
	 To appoint an environmental officer responsible for the implementation of this EMP.
	 To ensure that all tasks undertaken under the scope of work, are in accordance both with NamPower's SHEW policies and procedures as well as to the requirements of this EMP.
	 Ensure that employees are regularly trained and awareness built relating to environmental and social management.
	 To ensure that all incidents, accidents, and complaints are reported to the project manager. The contractor to ensure that incidents and accidents are investigated to prevent re- occurrence.
	 Ensuring that all employees receive a SHEW induction before the start of the project.
	 Ensuring that the work being done does not create a nuisance to any being working, residing, or living on adjacent properties or within the immediate surroundings of the site.

6 DESCRIPTION OF OPERATIONAL ACTIVITIES TO BE UNDERTAKEN AND ASSOCIATED IMPACTS

The activities associated with operational, and maintenance (the socio-economic and environmental impacts) include but not limited to the ones listed in table 3 below.

Table 3: Description of the activities related to the operational activities.

Activity	Description	Associated potential impacts
General functioning and presence of the powerline.	Physical presence and functional characteristics of the powerline.	 Animal (including birds) mortalities through collisions and electrocution. Visual impact. Community impacts in a form fatalities or injuries caused by electrocution. Meeting electricity demand (positive impact).
Maintenance of the line	 The maintenance of the line entails but not limited to: General line components repairs/replacements. Construction or repairing of access roads. Repair or replacement of towers or tower components and others. Upgrades 	 Soil and water contamination Waste generation leading to filling up of landfill space. Loss of biodiversity Loss of sensitive habitats, flora, and fauna. Social issues related to the introduction of new workers in the area, e.g. HIV/AIDS spreading. Loss of human life (through electrocution)
Periodic inspections and monitoring	 Inspecting the line and substation conditions and assess compliance to procedures and legal requirements. 	 Soil and ground water contamination as a result of oil spills Soil contamination because of improper waste handling and disposal.

Installation of Optic Fiber networks	 Design, Supply, Delivery, Installation and Commissioning of Optic Fiber networks for communication purposes. 	 Loss of biodiversity if existing access roads are not used. Loss of biodiversity Soil contamination because of improper waste handling and disposal. Loss of sensitive plants and habitats.
Vegetation Management	Removal of trees and bushes to maintain access to the line servitude.	 Loss of biodiversity Conflict with stakeholders Loss of topsoil Soil and water contamination Loss or damage to heritage and cultural resources.

7 MANAGEMENT AND MITIGATION MEASURES

To ensure that the potential impacts are eliminated and/or minimised, it is necessary to ensure that the various activities related to the operation and maintenance of the power lines are adequately managed and monitored. Table 4 below outline mitigation measures as well as objectives to be achieved. A responsible person (s) has been assigned to each mitigation measure (s).

Table 4: Proposed mitigation measures for the general operational activities

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
Safety Health and Environmental (SHE) Awareness	 All employees should undergo SHE induction before work commences onsite. All employees are to be made aware of their individual roles and responsibilities in achieving compliance with the EMP. SHE toolbox talks to be conducted and records to kept onsite. 	Area superintendentProject managerSHEWContractor
Safety Management	 A SHE file must be submitted and reviewed by the SHEW section in case of projects in accordance with NamPower SHE requirements. NamPower Procedures, policies and legal requirements pertaining to safety must be complied with. Measures must be identified and implemented to safeguard community safety. 	Area superintendentProject managerContractorSHEW
Fire Management	 Eliminate the presence of potential sources of ignition and provide appropriate equipment to minimize fire risk. Fire extinguishers to be readily available onsite and in vehicle. Regular servicing of fire extinguishers. 	Area superintendentProject managerContractor

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
	 Firefighting training to be provided to employees. Maintain fire breaks. 	
Air Quality	 Dust generation from all activities must be minimised. Excavation, handling, and transportation of erodible materials shall be avoided under high wind conditions or when a visible dust plume is present. Speed limit to be enforced to control dust emissions. Dust suppression measures shall be implemented when necessary. Vehicle, machinery, and equipment shall be maintained in good working order to minimise exhaust fume emissions. Vehicle, machinery, and equipment must be serviced by competent personnel and records must be filed. 	 Area superintendent Project manager Contractor
Resources Efficiency	 Minimise water wastage and record water usage. Avoid wasteful use of materials. Source goods and services locally were possible 	Area superintendentProject managerContractor

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
Waste Management	 Minimise the generation of waste by applying the waste hierarchy. Line servitude to be kept free of waste. No burning, burying, or dumping of any waste materials shall be permitted onsite. Labelled waste bins with lids must be provided at campsites (in case of a project) for all waste streams and ensure that waste is disposed at nearest approved waste disposal site. Ensure that waste segregation is done at source. Hazardous waste shall be disposed of at a registered hazardous waste disposal site. Safe disposal certificates for hazardous waste must be kept in the SHE file. Concrete waste must not be dumped on site. 	 Area superintendent Project manager Contractor
Wastewater management	 Water containing environmental pollutants shall be collected and removed from site. No wastewater runoff or uncontrolled discharges from the site/working areas 	Project managerContractorArea superintendent

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
	shall be permitted.	
	Mobile toilets or septic tanks should be used in remote areas.	
Hazardous Substances	 The use, handling, storage, and disposal of the hazardous chemical must be in accordance with the MSDS. Containers must be clearly marked to indicate contents and quantities. Hazardous substances storage areas must be bunded. A bund should be able to contain 110% of the volume of the largest container stored within it. Diesel and other liquid fuel, oil and hydraulic fluid must be stored in appropriate storage tanks or in bowsers with secondary containment. Inspect and maintain hazardous storage areas and bund walls to avoid overflows. Ensure that drip trays are available, to be use in case of leaking equipment. Spill kit and absorbents must be available to clean – up a spill. Hazardous substance storage areas must display safety symbolic signs. 	 Area superintendent Project manager Contractor
	All spills must be reported, cleaned, and remediated to in compliance with SHEW requirements.	

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
Social Impact	 NamPower/ Contractor must sign land permission form and agreement with landowners 14 days prior to commencement of work onsite. Employees should be properly educated about the impact of HIV / AIDS and pregnancies. The use of intoxicating liquor or drugs of any kind by the employees is prohibited. Ensure that all queries and complaints are documented, investigated, and dealt with. A register shall be kept of all complaints from stakeholders, this should also the actions taken to rectify the complaints. 	 Area Superintendent Project Manager All NamPower employees Contractor
Archaeology	 Should a heritage site or archaeological site be uncovered or discovered during the operation phase, a "change find" procedure in appendix 4 should be applied. Any chance finds must be reported to NamPower environmental section. In an event of discovery of human remains or other artefacts the work shall cease. A professional archaeologist is to be consulted and carry out investigation. 	Area superintendentProject ManagerSHEWContractor

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
Fauna and Flora	 Ensure that the site is kept clean and free of rubbish that could potentially attract animals and pests. No harvesting or damaging of plants is allowed. Poaching or capturing of any animal (wild or domestic) is prohibited. Bird nests may not be disturbed unless interfering with the normal operation of the line. Vehicles driving along the lines should engage four-wheel drive to prevent spinning and consequent impacts on soil surface. Do not destroy, damage, collect any protected flora species that may be encountered unless interfering with the normal operation of the line. Minimize disturbances in sensitive areas. Only remove/prune flora directly affecting the powerline. Identify potential bird collision prone areas (i.e. habitats). Bird flight diverters (BFD's) must be installed in collision prone areas with recorded high bird mortalities. 	 Area superintendent Project Manager Contractor

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
	Monitor all bird mortalities encountered under the powerline.	
	All wildlife and electrical infrastructure interactions such as (animal/bird)	
	deaths) must be reported to the SHEW section.	
	Sensitive areas must be preserved as practically possible.	
Water Resources	Care must be taken to ensure that pollution of water does not occur.	Area superintendent
	Naturally occurring water resources may not be used for any personal hygiene.	Project Manager
	Water may only be taken from a private or government property based on an	 Contractor
	agreement between the NamPower, contractor and custodian of the water source.	
Erosion	Implement and maintain erosion control measures where required along the	Area superintendent
	access route.	Project Manager
	Rehabilitate eroded areas	 Contractor
Campsite Establishment	Adequate ablution facilities must be provided onsite in relation to the number	Area superintendent
	of employees in compliance with the applicable legislations.	 Project Manager
	Septic tanks/ or similar polluted water containment methods must be used in	

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
	 remote area. Ablution facilities must not be located within 100m of any river, stream channel, pan, dam or borehole. Fire extinguishers, first aid kits, assembly point, and emergency numbers must be available onsite. Waste must be managed in accordance with waste management requirements 	Contractor
Vegetation Removal	 Obtain a permit from the Ministry of Environment, Forestry and Tourism to remove protected trees as per the Forest Act No. 12 of 2001. 	Area superintendentProject ManagerSHEW
	 Measures must be put in place to avoid erosion especially at rivers, stream channel crossings, and at places where existing erosion scars and dongas are encountered to avoid any further erosion. Manual bush clearing method is recommended. 	 Contractor
	 Measures must be put in place to preserve the topsoil structure. The disturbed soil must be levelled. Do not remove wood cut on site as this would affect the recycling of nutrients locally as well as lead to a potential industry in firewood targeting the better-quality tree species. 	

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
	 Where clearing is done near a river, the contractor/NamPower must ensure that no felled bushes/branches/shrubs are left behind in the riverbed. No burning of bush cleared materials is allowed onsite. Vegetation removal should be done in accordance with NamPower Procedures. Avoid the cutting down of protected tree species [Forestry Ordinance No. 37 of 1952) not directly affecting the power lines during the line clearing operation. Vegetation must be removed only when necessary. 	
Site Rehabilitation (progressive and post rehabilitation)	 Progressive rehabilitation when project work is in progress. Post project rehabilitation must also be done. All materials, equipment and waste must be removed from site. An audit prior to the contractor leaving site must be conducted. Non – conformance to be rectified before the contractor/project team leave the site. 	Area superintendentProject ManagerSHEWContractor
Emergency Response	 All possible emergencies must be identified. Emergency preparedness and response plans for the identified emergencies must be prepared and communicated to all relevant stakeholders. 	Area superintendentAll district personnel

ASPECT	MANAGEMENT AND MITIGATION MEASURES/COMMITMENTS	RESPONSIBLE PERSON
	District personnel or any other person conducting work on the lines must have emergency numbers such as for fire brigades, ambulance services, hospitals, police, snake, and bee catchers.	Project ManagerContractor

8 REPORTING, MONONITORING AND AUDITING

The environmental monitoring, inspections and audits must be conducted in line with supporting procedures and requirements of this plan. Monitoring and inspection\audit reports detailing the monitoring and audit results shall be prepared by the SHEW section and communicated to the Area Manager or Superintendent or Project Manager. Records of monitoring and inspection\auditing report shall be kept and will be made available during inspections and audits.

9 NON-COMPLIANCE AND CONFLICT MANAGEMENT PROCEDURES

The Area Superintendent and Contractor shall ensure that the employees and external service providers comply with the requirements outlined in this EMP. In the event of non-compliance, the following recommended process shall be followed:

- Non compliances will be identified during inspections or audits carried out by the SHEW Section and reported to the Area manager, Superintendent or Project Manager for corrective actions.
- Area Superintendent / Project Manager shall notify the responsible stakeholders about the non-compliance.
- Corrective and preventative actions must be implemented on an agreed timeframe.
- Follow up inspections/audits shall be conducted to assess whether the corrective and preventative actions were implemented effectively.

The contractor shall notify NamPower of the following:

- Conflicts arising with any landowner / representative.
- Any special conditions requested by a landowner / representative.

NamPower has the right to stop all contractor's activities if it is found that a gross violation of the EMP is taking place.

10 RECORD KEEPING

Record keeping is important for the effective functioning and implementation of an EMP. EMP documentation must be kept in both the hard copy and electronic format for safe keeping. These

must include but not limited to:

- Copy of the Environmental Clearance Certificate
- A copy of an EMP
- EMP implementation activities
- Induction records
- Audit and Inspection reports
- Other related documents

11 CONCLUSION

All management measures and legal requirements outlined in this EMP should be implemented to ensure environmental compliance by all parties undertaking the operational activities. This will ensure that potential negative impacts are identified, avoided or mitigated and positive impacts are enhanced. It is unlikely that the operation and maintenance of the powerline will have significant environmental and social repercussions, and it is therefore recommended that the ECC is issued.

12 REFERENCES

Cunningham, P. (2021). ECOLOGY AND VEGETATION ASSESSMENTS WITHIN VARIOUS SOUTHERN NAMPOWER TRANSMISSION LINES – 22kV Aussenkehr to Aussenkehr North (Aussenkehr area) [Rapid Ecology & Vegetation Assessments].

Annexure 1: Areas of importance and protected species

Table 6. Areas of importance, with protected species potentially affected, along the 22kV Harib - Schonau distribution line.

Hotspot areas	Distance (km)	Area	Important species	Common names	Status	Aliens	Other important features	Importance ranking
	0 to 7.5	Harib SS						Low
	7.5 to 7.8	Farm Schonau	Vachellia erioloba	Camel thorn	F		Drainage line	High
	7.8 to 8.4	Farm Schonau				Prosopis spp.		Low

Distance: Might not be precise as it measured using car odometer

Importance ranking: High & Low

Status: F: Forest Act No. 12 of 2001

Distance: 18.3km Importance ranking: Low

Annexure 2: Protection of Ecology & Vegetation

Activity: Protection of Ecology & Vegetation	Comp	liance
	Yes	No
Track discipline		
Evidence of new tracks		
Evidence of off-road driving		
Evidence of turnaround violations		
Evidence of oil spills		
Evidence of waste		
Evidence of litter		
Illegal collection/damage of flora		
Evidence of illegal plant collection		
Evidence of vehicle damage to plants		
Evidence of unauthorised people/vehicles		
Erosion		
Evidence of erosion along route		
Evidence of recovery at rehabilitated sites		
Invasive alien plants		
Evidence of invasive alien plants along route		
Bird mortalities		
Record all dead birds encountered below the line		

Annexure 3: Landowner permission form



Landowner Permission Form



Landowner name:	Contact number:
Representative name:	
Farm name:	
Contractor:	
Representative name:	Contact number:
•	General Notice a contractor entering a landowner's property to the construction or maintenance of power-line

Section A: Before activities commence.

Activities to be undertaken on the property (completed by the contractor):

Use of water resources		Camping Bush	
Powerline erection Powerline		clearing	
refurbishment Trimming of		Herbicide application	
vegetation Use of other		Access Road usage	
infrastructure(please specify)		Rehabilitation	
Specific conditions to be me	t on the propert	ty (as stipulated by the landowne	<u>er):</u>
Dates when access is neede	ed:		
	From:		То:
Signatures (prior to entry)			
Landowner/Representative		Contractor representative	_
			_
Date		Date	_

Section B: Upon completion of work and prior to leaving the property

Remarks on compliance or misconduct (upon completion of activities):		
Issues still to be resolved upon complete	tion of activities:	
Signatures (upon completion)		
Landowner/Representative	Contractor representative	
Date	Date	

Annexure 4: Chance find procedure

Definition: The "chance finds" procedure covers the actions to be taken from the discovery of a heritage site or item to its investigation and assessment by a trained archaeologist or other appropriately qualified person.

Compliance: The "chance finds" procedure is intended to ensure compliance with relevant provisions of the National Heritage Act (27 of 2004), especially Section 55 (4): "a person who discovers any archaeological object must as soon as practicable report the discovery to the Council". The procedure of reporting set out below must be observed so that heritage remains reported to the NHC are correctly identified in the field.

Procedure:

Action by person identifying archaeological or heritage material

- a) If operating machinery or equipment stop work
- b) Identify the site with flag tape
- c) Determine GPS position if possible
- d) Report findings to foreman

Action by foreman

- a) Report findings, site location and actions taken to superintendent
- b) Cease any works in immediate vicinity

Action by superintendent

- a) Visit site and determine whether work can proceed without damage to findings
- b) Determine and mark exclusion boundary
- c) Site location and details to be added to project GIS for field confirmation by archaeologist

Action by archaeologist

- a) Inspect site and confirm addition to project GIS
- b) Advise NHC and request written permission to remove findings from work area
- c) Recovery, packaging and labelling of findings for transfer to National Museum

In the event of discovering human remains

- a) Actions as above
- b) Field inspection by archaeologist to confirm that remains are human
- c) Advise and liaise with NHC and Police
- d) Recovery of remains and removal to National Museum or National Forensic Laboratory, as directed.