

# UPDATED ENVIRONMENTAL MANAGEMENT PLAN

## UPGRADE OF THE ROOIKOP BULK WATER PIPELINE

MAY 2021

## TABLE OF CONTENTS

---

<b>APPENDICES .....</b>	<b>iii</b>
<b>TABLE OF FIGURES .....</b>	<b>iii</b>
<b>GLOSSARY .....</b>	<b>iv</b>
<b>ABBREVIATIONS.....</b>	<b>vii</b>
<b>1 INTRODUCTION .....</b>	<b>1</b>
<b>2 ENVIRONMENTAL MANAGEMENT PLAN .....</b>	<b>3</b>
<b>2.1 What is an Environmental Management Plan? .....</b>	<b>3</b>
<b>2.2 What are the legal implications and obligations under this plan? .....</b>	<b>3</b>
<b>3 PROJECT DESCRIPTION .....</b>	<b>4</b>
<b>3.1 Project Location.....</b>	<b>4</b>
<b>3.2 Project Design.....</b>	<b>4</b>
<b>3.3 Project Phases .....</b>	<b>4</b>
<b>4 GENERAL REQUIREMENTS FOR THE EMP .....</b>	<b>6</b>
<b>4.1 EMP administration .....</b>	<b>6</b>
<b>4.2 Role players and their responsibilities .....</b>	<b>6</b>
<b>4.3 Environmental Awareness Training.....</b>	<b>10</b>
<b>4.4 Public Participation .....</b>	<b>11</b>
<b>5 COMPLIANCE MONITORING .....</b>	<b>12</b>
<b>5.1 Implementation of the EMP.....</b>	<b>12</b>
<b>5.2 Non Compliance and Penalties .....</b>	<b>16</b>
<b>5.3 Environmental Completion Statement.....</b>	<b>17</b>
<b>5.4 Emergency preparedness .....</b>	<b>17</b>

5.5	Financing of environmental control .....	18
5.6	Disputes and disagreements .....	18
5.7	Amendments to the EMP .....	18
5.8	Construction Monitoring .....	18
5.9	Post-construction environmental audit .....	19
<b>6</b>	<b>ENVIRONMENTAL SPECIFICATIONS .....</b>	<b>20</b>
6.1	Scope .....	20
6.2	Construction .....	20
6.3	Materials .....	34
6.4	Construction Plant.....	36
6.5	Post Construction.....	42
6.6	Compliance with requirements and penalties .....	42
6.7	Measurement and Payment .....	45
6.8	Mitigation Measures and Proposed Management Programme.....	45

## APPENDICES

- Appendix A:** Environmental Method Statement
- Appendix B:** Rehabilitation Management Plan
- Appendix C:** Pro-Forma: Environmental Monitoring Report
- Appendix D:** Roads Authority typical drawing No. N3058
- Appendix E:** Chance Find Procedures (National Heritage Council)

## TABLE OF FIGURES

Figure 1: Locality of project area

2

## GLOSSARY

**Alien Vegetation:** Alien vegetation is defined as undesirable plant growth which shall include, but not be limited to, all declared category 1, 2 and 3 listed invader species. Other vegetation deemed to be alien shall be those plant species that show the potential to occupy in number, any area within the defined construction area.

**Audit:** Regular inspection and verification of construction activities for implementation of the EMP.

**Batch Plant:** Machinery used on site for the mixing and production of concrete and associated equipment and materials.

**Bund:** Enclosure under/around a hazardous substance storage facility to contain any spillage.

**EMP:** This document, Construction Environmental Management Plan for managing potential environmental impacts during the construction phase of a development.

**Contaminated Water:** Water contaminated by the Contractor's activities, e.g. concrete water and runoff from plant/personnel wash areas.

**Construction Activity:** A construction activity is any action taken by the Contractor, his subcontractors, suppliers or personnel during the construction process.

**Contractor:** Any legal entity or consortium contracted by the Ministry of Trade and Industry or their executing agent, the Namibia Development Corporation (applicant) to undertake the activity associated with the construction of the proposed development.

**DEA:** Namibia's Department of Environmental Affairs, the Government authority responsible for authorising activities in terms of the Environmental Management Act, No. 7 of 2007.

**Developer:** The Company or its duly authorised and appointed representative, responsible for the construction activities of the project.

**Emergency Situation:** An incident, which potentially has the ability to significantly impact on the environment, and which, could cause irreparable damage to sensitive environmental features. Typical situations entail amongst others the:-

- Spill of petroleum products and lubricants into the aquatic system;
- Potential damage, erosion and slumping of unstable river embankments or drainage channels;
- Potential event of impeding the continuous flow of water to downstream water users dependant on the flow; and
- Dangerous situation where livestock and children can be injured by any activity emanating from the construction or rehabilitation of the project implementation.

**Engineer:** The person(s) who represents NAMWATER (the Proponent) and are responsible for the technical and contractual implementation of the works to be undertaken by the appointed contractors.

**Environment:** The biosphere in which people and other organisms live. It consists of renewable and non-renewable natural resources, natural or modified ecosystems and habitats, and places of cultural significance.

**Environmental Impact:** An impact or environmental impact is the change to the environment, whether desirable or undesirable, that will result from the effect of a construction activity between the limits that define the construction site. An impact may be the direct or indirect consequence of a construction activity.

**Environmental Impact Assessment (EIA):** The process of examining the environmental effects of a project. The assessment requires detailed/specialist studies of significant issues that have been identified during the environmental Scoping phase.

**Environmental Management Plan (EMP):** A detailed plan of action prepared to ensure that recommendations for enhancing positive impacts and/or limiting or preventing negative environmental impacts are implemented during the life-cycle of a project.

**Environmental Site Manager (ESM):** A suitably qualified professional to be appointed by NAMWATER(the Proponent) who oversees the construction phase and ensure that all environmental specifications and EMP obligations are met during the phase. The ESM will be responsible for the monitoring, reviewing and verifying of compliance with the EMP by the Contractor.

**Hazardous Substance:** A substance that, in the reasonable opinion of the Engineer and/or ESM, can have a harmful effect on the environment.

**Landscape Architect/Ecologist:** The person or company responsible for the landscape architectural aspects of a development.

**Monitoring:** Regular inspection and verification of construction activities for degree of compliance to the EMP.

**'No Go' Areas:** Areas identified as being environmentally sensitive in some manner and demarcated on plan, and on the Site with pegs or fencing and which are out of bounds to unauthorised persons. Authorisation must be obtained prior to entry.

**Proponent:** The Company or its duly authorised and appointed representative, with rights to undertake the development on the Site.

**Resident Engineer (RE):** A person who represents the Engineer on Site and is responsible for the technical and contractual implementation of the works to be undertaken.

**Search and Rescue:** The location and removal of specified plant species, without unnecessary damage, and their transfer to a specified location (on-site nursery).

**Species of Special Concern:** Those species listed in the Endangered, Threatened, Rare, Indeterminate, or Monitoring categories of the South African Red Data Books, and/or species listed in Globally Near Threatened, Nationally Threatened or Nationally Near Threatened categories (Barnes, 1998).

**Site:** The boundary and extent of development works and infrastructure, including any areas off the main site on which works are to be carried out in order to allow the development to proceed successfully.

**Solid Waste:** All solid waste, including construction debris, chemical waste, excess cement/concrete, wrapping materials, timber, tins and cans, drums, wire, nails, food and domestic waste.

**Specification:** A technical descriptions of the standards of materials and workmanship that the Contractor is to use in the works to be executed, the performance of the works when completed and the manner in which payment is to be made.

**Topsoil:** The top 30cm of soil (topsoil) and root material of cleared vegetation.

**Works:** The construction operations and all related and incidental works, such as search and rescue, fencing and rehabilitation, in connection with the execution and carrying to completion of the project.

## ABBREVIATIONS

CoC	Code of Conduct
DEA	Department of Environmental Affairs
ECO	Environmental Control Officer
EMP	Environmental Management Plan
ER	Environmental Representative
ESM	Environmental Site Manager
MET	Ministry of Environment and Tourism



# 1 INTRODUCTION

The existing underground bulk water pipeline between Devil's Fork Manhole and the Rooikop Terminal Reservoir (hereafter referred to as the Rooikop pipeline) was built in 1970s and stretches over a distance of approximately 4.4 km (see Figure 1). It was built with the purpose of transferring potable water from the Schwarzekuppe Reservoir to the Walvis Bay Airport and Rooikop Military Base via the Rooikop Terminal Reservoir. The Rooikop Terminal Reservoir, which has a capacity of 1000 m<sup>3</sup>, is the only source of potable water supplying the Walvis Bay International Airport and Rooikop Military Base.

The Rooikop pipeline is a 150 mm diameter, Class 18, asbestos cement (AC) pipeline. This pipeline has reached the end of its lifespan, evidenced by the frequent breaks and leaks over the past 7 years. The current flow rate through the pipeline is being throttled below 65 m<sup>3</sup>/h, with an average of about 45 m<sup>3</sup>/h to protect the pipe from breaking.

These yearly pipe breaks result in interruptions to water supply, which have both financial implications to NamWater and socio-economic implications to the affected end-users (Namibia Airports Company and the Rooikop Military Base). Furthermore these pipe breaks result in large quantities of water losses, which in turn results in wastage of scarce water resources.

It has therefore become necessary to upgrade/replace the existing Rooikop pipeline.

In light of the need to undertake the proposed project Urban Green cc (hereafter Urban Green) was appointed by NamWater to undertake an environmental assessment (EA) for purpose of applying for an environmental clearance certificate (ECC) for the proposed upgrade of the Rooikop bulk water pipeline (here after referred to as the project).

This EMP describes environmental management requirements for the planning, construction, operation, decommissioning and closure phases associated with the project (Figure 1)

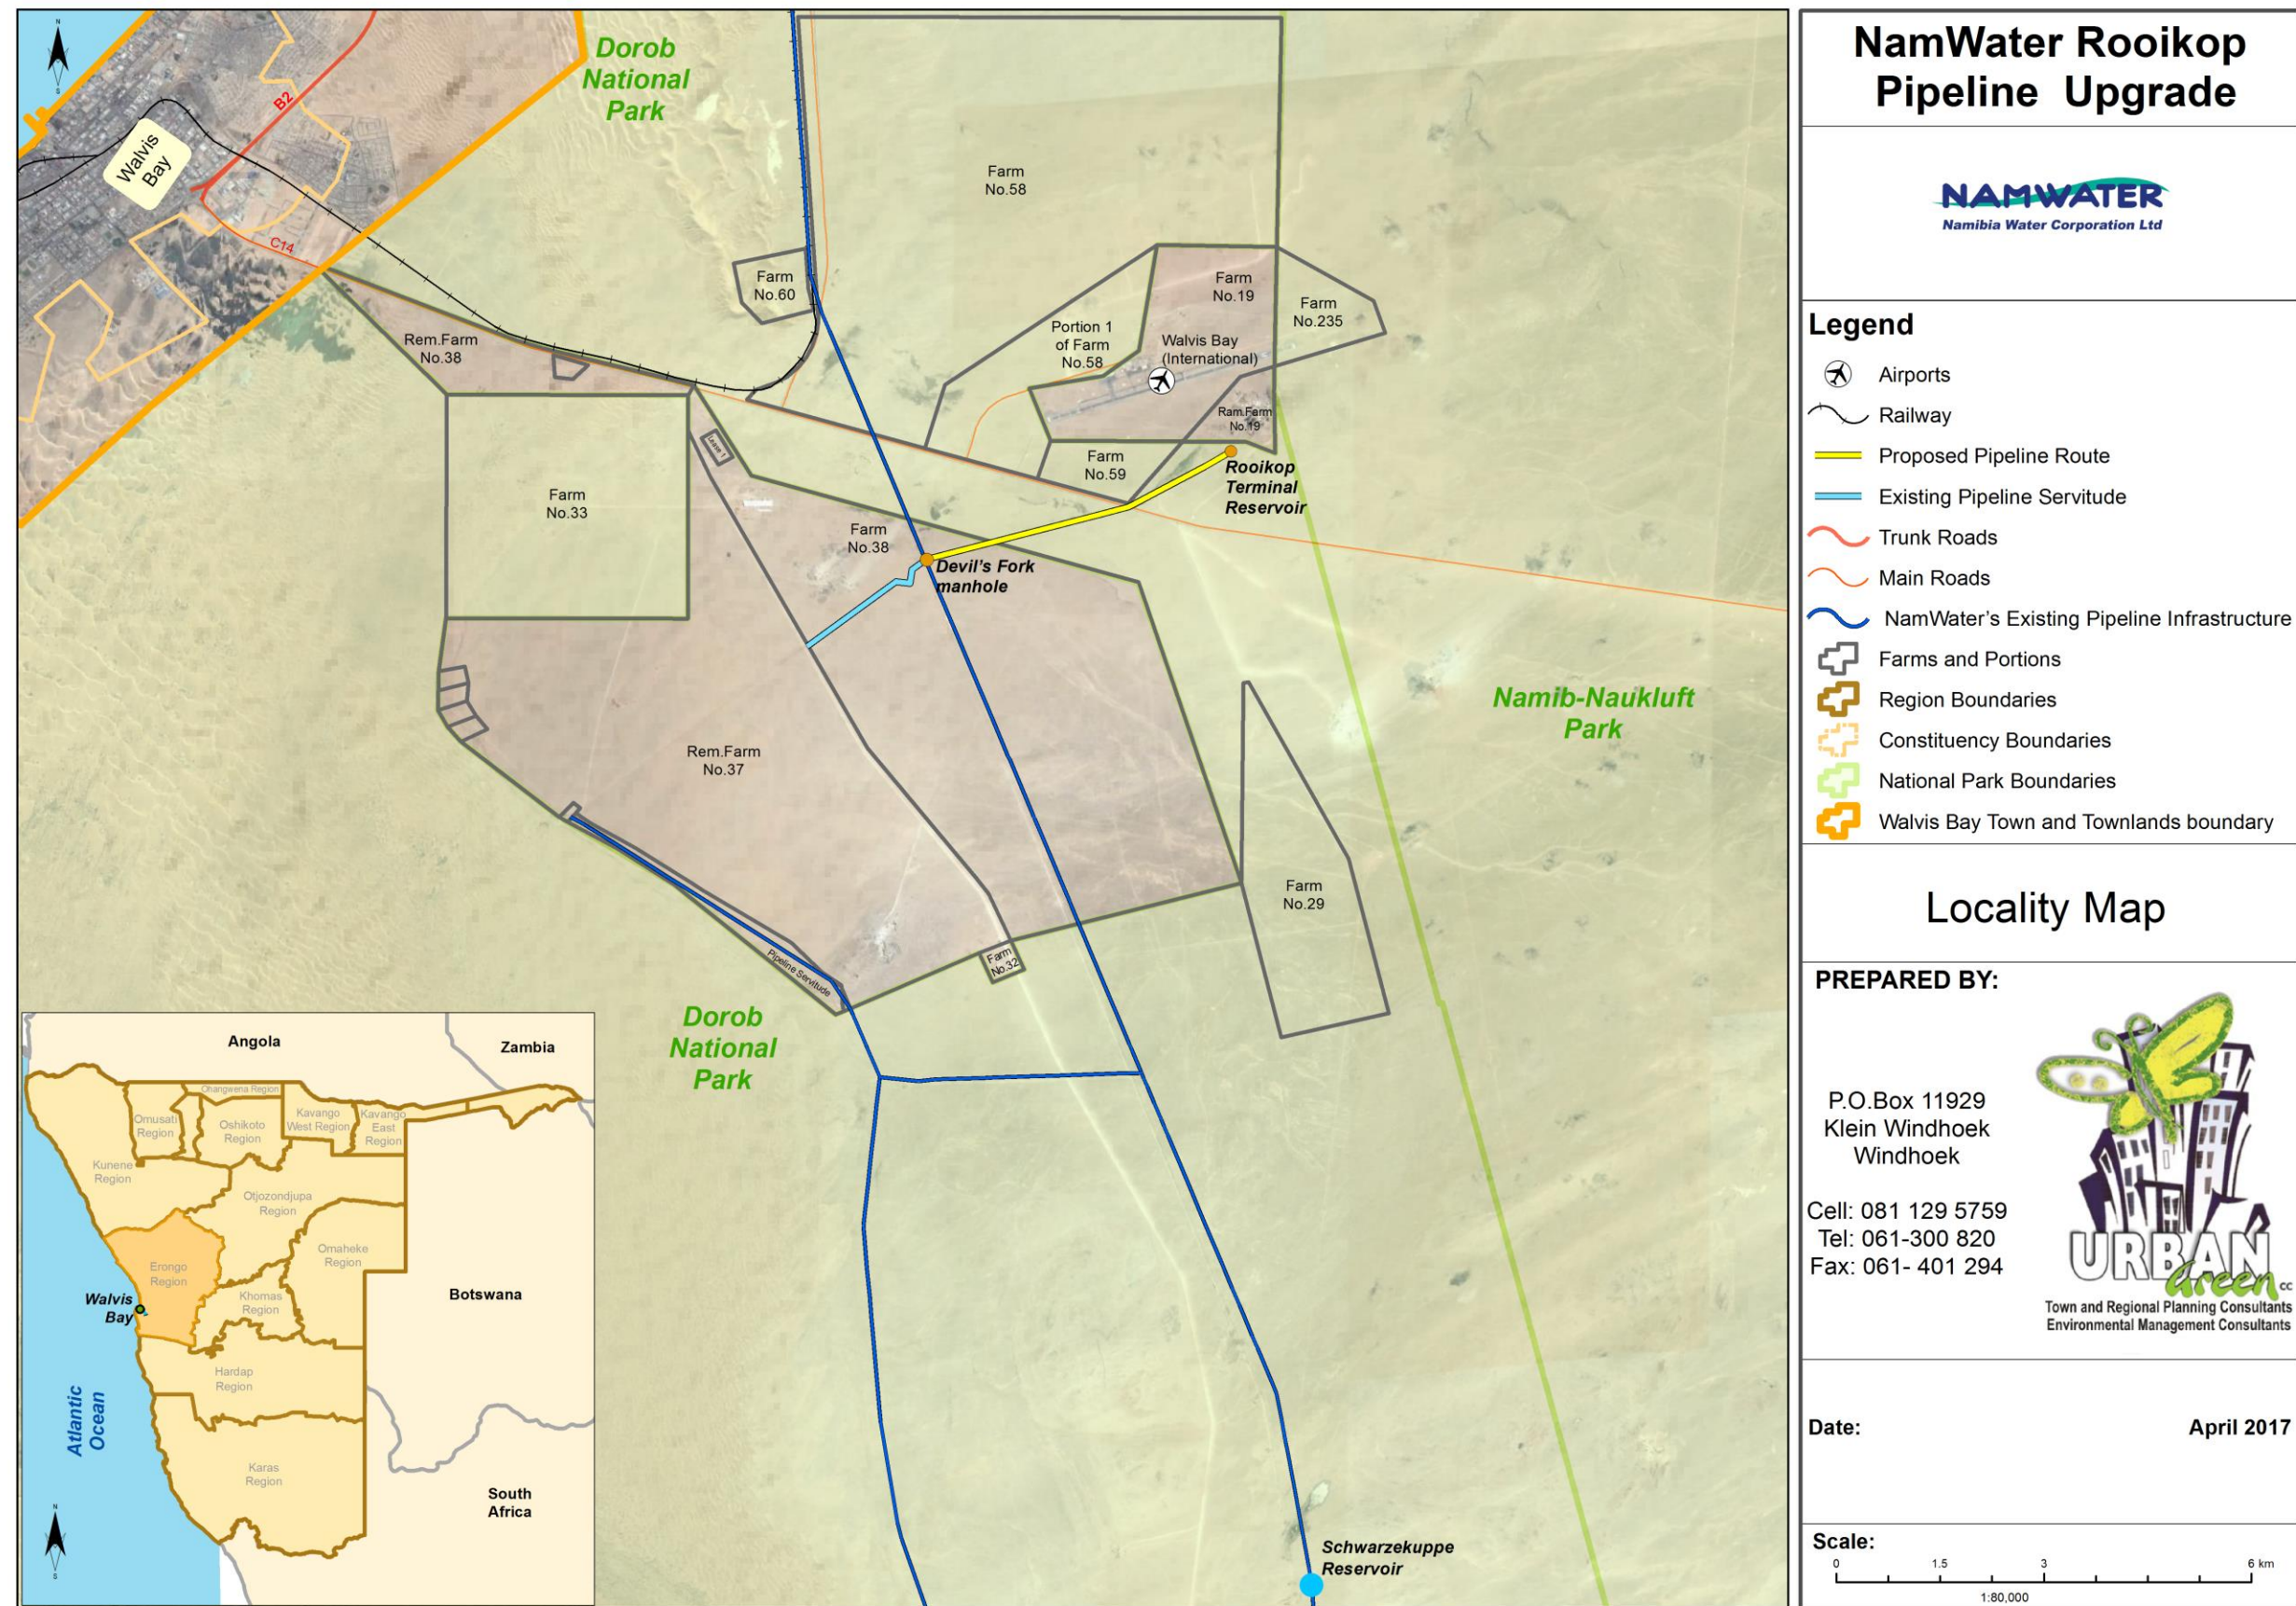


Figure 1: Locality of project area

## 2 ENVIRONMENTAL MANAGEMENT PLAN

### 2.1 What is an Environmental Management Plan?

Environmental Management Plans (EMPs) are important tools that focus on the management actions that are required to ensure environmental compliance of a project. The Environmental Impact Assessment Regulations (2012) of the Environmental Management Act (2007) state that “*management plan means a plan that describes how activities that may have significant effects on the environment are to be mitigated, controlled and monitored*”.

It further indicates that a draft management plan should include:

- *“information on any proposed management, mitigation, protection or remedial measures to be undertaken to address the effects on the environment that have been identified including objectives in respect of the rehabilitation of the environment and closure;*
- *as far as is reasonably practicable, measures to rehabilitate the environment affected by the undertaking of the activity or specified activity to its natural or predetermined state or to a land use which conforms to the generally accepted principle of sustainable development; and*
- *a description of the manner in which the applicant intends to modify, remedy, control or stop any action, activity or process which causes pollution or environmental degradation remedy the cause of pollution or degradation and migration of pollutants.”*

EMP implementation is a cyclical process that converts mitigation measures into actions and through cyclical monitoring, auditing, review and corrective action, ensures conformance with stated EMP aims and objectives. An EMP must respond to unforeseen events and changes in project implementation that were not considered before. Through monitoring and auditing, feedback for continual improvement in environmental performance must be provided and corrective action taken to ensure that the EMP remains effective.

### 2.2 What are the legal implications and obligations under this plan?

The EMP will be sent to the Ministry of Environment and Tourism’s (MET) Department of Environmental Affairs (DEA) for approval. Once the DEA is satisfied with the contents of the EMP, they will issue a pro-forma Environmental Clearance Certificate (ECC) to the Proponent. The ECC is linked with the recommendations of the EMP.

The EMP, once accepted, therefore becomes a legally binding document and each role-player including contractors and sub-contractors who are made responsible to implement the relevant sections of this EMP are required to abide to the conditions stipulated in this EMP document.

## 3 PROJECT DESCRIPTION

### 3.1 Project Location

The project area includes the affected areas along the Rooikop pipeline route alignment between the Devil's Fork Manhole and the Rooikop Terminal Reservoir. The Rooikop pipeline route alignment traverses the south-western parts of the Erongo Region in an area known as the central coastal region of Namibia. The pipeline route crosses the C14 near the Walvis Bay International Airport (Figure 1). The proposed project is located outside the Walvis Bay Townlands within the Dorob National Park (i.e. state land) and farm land under the ownership of the Walvis Bay Municipality (see Figure 1).

### 3.2 Project Design

The Proponent proposes to replace the failing 150 mm diameter AC pipeline with a new 150 mm diameter high density polyethylene (HDPE) pipeline. The total length of the proposed pipeline will be approximately 4.4 km.

The current flow rate through the existing Rooikop pipeline, which on average is approximately 45 m<sup>3</sup>/h, is being throttled below 65 m<sup>3</sup>/h, to protect the existing pipe from breaking. The HDPE pipeline will enable flow rates of up to 65 m<sup>3</sup>/h and potentially higher.

The existing pipeline is buried at a shallow depth and in some areas along the existing route the pipeline is exposed. This indicates that there might be hard rock underneath the existing pipeline. However, since the new pipeline replaces the existing pipeline, the new pipeline is planned to be laid in the existing trench. The minimum soil coverage will be at least equal to that for the existing pipeline for its entire length except where it crosses the C14 main road via a culvert and the areas immediately adjacent to this culvert. In accordance with design requirements from the Roads Authority, the pipeline in the areas immediately adjacent to the abovementioned culvert will be covered with a minimum surface cover of 600 mm.

### 3.3 Project Phases

The life cycle of the project constitutes different phases, and the EMP's contents have been arranged accordingly, i.e.:

- Planning and Design Phase;
- Site establishment Phase
- Construction Phase;
- Operation and Maintenance Phase;
- Decommissioning and Closure Phase.

This EMP makes provision for the decommissioning and closure phase at a preliminary level. More detailed decommissioning and closure phase mitigation measures should be devised with each 3-yearly renewal of the ECC for this project.

## 4 GENERAL REQUIREMENTS FOR THE EMP

### 4.1 EMP administration

Copies of this EMP shall be kept at the site office and will be distributed to all senior contract personnel. All senior personnel shall be required to familiarise themselves with the contents of this document.

### 4.2 Role players and their responsibilities

The implementation of this EMP requires the involvement of several stakeholders, each fulfilling a different but vital role to ensure sound environmental management during each phase.

#### 4.2.1 Environmental Forum

NamWater (the Proponent) will be responsible for the establishment of an Environmental Forum which will comprise of two representatives from NamWater, the Engineer, the Resident Engineer and an Environmental Site Manager (ESM) or any other nominee in the event of one of the members not being able to attend.

The core function of this Forum will be to –

- Provide feedback to stakeholders regarding the project and implementation of the EMP;
- Highlight stakeholder concerns regarding implementation and to address stakeholder concerns; and
- Handle any disputes or disagreements between role players on site (with regard to environmental management).

Regular meetings will be held by the Environmental Forum, the purposes of the meetings shall be:

- To establish the suitability of the Contractors' methods and machinery in an effort to lower the risk involved for the environment.
- To discuss possible non-compliance to EMP guidelines or environmental legislation.
- To discuss the general state of the environment on site and discuss any environmental problems which may have materialised.

#### 4.2.2 Environmental Site Manager (ESM)

The ESM must be an appropriately qualified person in environmental management and must possess the skills necessary to impart environmental management skills to all personnel involved in the contract. The Proponent needs to appoint the ESM who will act as the on-site implementing agent and has the responsibility to ensure that the Proponent's responsibilities are executed in compliance with relevant legislation and the EMP. In addition to general project management, the ESM has the responsibility to appoint the Environmental Control Officer (ECO) (see below).

Any on-site decisions regarding environmental management are ultimately the responsibility of the ESM. The on-site ESM shall assist the ECO where necessary and will have the following responsibilities in terms of the implementation of this EMP:

- The ESM will be on site at a predetermined frequency (at least once every third week) and will be responsible for ensuring implementation of the EMP throughout the construction period.
- Ensuring that the necessary environmental authorisations and permits have been obtained.
- Liaison with the Proponent, Engineer, Resident Engineer and Environmental Authorities. The ESM will be responsible to the Proponent.
- The ESM shall make recommendations independent of the Engineer; take immediate action on Site when (i) prescriptive conditions are violated, or in danger of being violated, and to inform the Engineer, Resident Engineer/s and Contractor/s immediately of the occurrence and to take action, e.g. issuing of fines; and (ii) where clearly defined and agreed 'no go' areas are violated, or in danger of being violated, and to inform the Engineer, Resident Engineer/s and Contractor/s of the occurrence and action taken.
- Assisting the Contractor in finding environmentally responsible solutions to problems with input from the ECO where necessary.
- Ordering the removal of person(s) and/or equipment not complying with the EMP specifications.
- The ESM must oversee the mitigation measures and ensure compliance with the conditions of approval and the EMP.
- Issuing fines for transgressions of site rules and penalties for contravention of the EMP.
- Providing input into the ECO's on-going internal review of the EMP, this review report is submitted to the Proponent.
- The ESM, along with the Engineer and RE, must obtain, examine and approve Method Statements.

- Involve specialists to advise on environmental management issues as they emerge during the construction phase.
- Advise the Engineer, Resident Engineer/s and Contractor/s on environmental issues within the defined work areas.
- Recommend corrective action to the Engineer, Resident Engineer/s and Contractor/s where construction activities are not in compliance with the EMP.
- To take immediate action on Site where clearly defined and agreed 'no go' areas are violated, or in danger of being violated, and to inform the RE of the occurrence and action taken.
- To environmentally educate and raise the awareness of the Engineer, Resident Engineer/s and Contractor/s and his staff as to the sensitivity of the Site and to facilitate the spread of the correct attitude during works on Site.
- To keep a comprehensive environmental record of activities on Site.
- Review the site logbook with regard to records of site activities that may pertain to the environment.
- To be reachable by the public regarding matters of environmental concern as they relate to the development (register of complaints and actions to be kept).
- To have input into the EMP documentation and to ensure compliance by the Contractor with the prescriptive conditions.
- The ESM shall have the right to investigate the site at any time during the project phases and unexpected visits will be allowed.

The ESM must have:

- a good working knowledge of all relevant environmental policies, legislation, guidelines and standards;
- should receive training by a suitably qualified archaeologist with respect to the identification of archaeological/heritage remains and the procedures to follow in the event that such remains are discovered during construction;
- the ability to conduct inspections and audits and to produce thorough and informative reports;
- the ability to manage public communication and complaints;
- the ability to think holistically about the structure, functioning and performance of environmental systems; and
- proven competence in the application of the following integrated environmental management tools:
  - EIAs.



- EMPs.
- Environmental auditing.
- Mitigation and optimisation of impacts.
- Monitoring and evaluation of impacts.

### 4.2.3 Environmental Control Officer (ECO)

The Environmental Control Officer (ECO) will be a competent person appointed by the ESM to implement, monitor, and review the on-site environmental management and implementation of this EMP by the Contractor.

The ECO's duties will include the following:

- Assisting the ESM in ensuring that the necessary environmental authorisations and permits have been obtained.
- Maintaining open and direct lines of communication between the ESM, Proponent (through the Namwater Environmental Manager (NEM), Mr. NP du Plessis), Contractor and stakeholders with regard to environmental matters.
- Arranging public meetings (if necessary).
- Regular site inspections of all construction areas with regard to compliance with the EMP.
- Monitoring and verifying adherence to the EMP, monitoring and verifying that environmental impacts are kept to a minimum.
- Taking appropriate action if the specifications are not followed.
- Assisting the Contractor in finding environmentally responsible solutions to problems.
- Monitoring the undertaking by the Contractor of environmental awareness training for all new personnel coming onto site.
- Advising on the removal of person(s) and/or equipment not complying with the specifications (via the ESM).
- Recommending the issuing of fines for transgressions of site rules and penalties for contraventions of the EMP (via the ESM).
- Auditing the implementation of the EMP and compliance with authorization on a monthly basis.
- Undertaking a continual review of the EMP and recommending additions and/or changes to the document.

### 4.3 Environmental Awareness Training

Contractors shall ensure that its employees and any third party who carries out all or part of the Contractor's obligations are adequately trained with regard to the implementation of the EMP, as well as regarding environmental legal requirements and obligations. Training shall be conducted by the ESM where necessary.

The purpose of this environmental training is to provide a general explanation of sustainable environmental practises, but also to explain the content of the EMP, the relevance thereof and how it will be implemented through monitoring. The general specifications of this EMP should clearly be explained to the Contractors and their site staff, as well as non-compliance to it and related penalties.

Environment and health awareness training programmes should be targeted at three distinct levels of employment, i.e. the executive, middle management and labour. The Proponent shall ensure that adequate environmental training takes place. All employees shall have been given an induction presentation on environmental awareness and the content of the EMP. The presentation shall be conducted, as far as is possible, in the employees' language of choice.

As a minimum, training should include:

- Explanation of the importance of complying with the EMP, including a basic explanation of the importance of environmental sustainability for the survival of mankind.
- Discussion of the potential environmental impacts of construction activities.
- Employees' roles and responsibilities, including emergency preparedness.
- Explanation of the mitigation measures required to be implemented when carrying out their work activities.
- Environmental legal requirements and obligations.
- Details regarding floral/faunal species of special concern and protected species, and the procedures to be followed should these be encountered during the construction of the pipeline, access roads, approach roads or construction camp.
- The importance of not littering.
- The importance of using supplied toilet facilities.
- The need to use water sparingly.
- Details of and encouragement to minimise the production of waste and re-use, recover and recycle waste where possible.

- Details regarding archaeological and/or historical sites which may be unearthed during construction and the procedures to be followed should these be encountered.

The contractor shall keep records of all environmental training sessions, including names, dates and the information presented.

#### **4.4 Public Participation**

An on-going process of public participation shall be maintained to ensure the involvement of stakeholders in a meaningful way. For this project it would be adequate to hold regular meetings with the relevant authorities Erongo Regional Council and the Walvis Bay Municipal Council when applicable to discuss progress and any construction issues that may arise. If a public matter arises, the Contractor shall immediately arrange a forum to resolve the issue with the interested and affected parties involved. These meetings shall be arranged by the ECO but shall be facilitated by the ESM. A complaints register shall be held on site to deal with issues raised by the public.

## 5 COMPLIANCE MONITORING

### 5.1 Implementation of the EMP

Implementation of the EMP will be the responsibility of all parties involved with the construction work. The Engineer and ESM will be central to this implementation.

Copies of the documents described below must be maintained on site at all times, available to both the Engineer and ESM, to be provided on request to authorities or stakeholders for inspection. Contractors' meeting minutes must reflect environmental queries, agreed actions and dates of eventual compliance.

#### 5.1.1 Site instruction entries

The Site Instruction Book will be used for the recording of general site instructions as they relate to the works on site and EMP measures. It will also be used for the issuing of stop-work orders issued by the ESM for the purposes of immediately halting any particular activities of the Contractor in lieu of the environmental risk that they may pose.

#### 5.1.2 ECO Diary entries

The purpose of these entries will be to record the comments of the ECO as they relate to activities on the site including infringements, possible changes to the EMP or work stop orders.

#### 5.1.3 Method Statements

Method statements from the Contractor will be required for specific sensitive actions on request of the authorities or ESM. A method statement forms the baseline information on which sensitive area work takes place and is thus considered a "live document" in that modifications can be negotiated between the Contractor and ESM if or as required. The Contractor (and, where relevant, any subcontractors) must also sign the Method Statement, thereby indicating that the works will be carried out according to the approved methodology. Changes in the methodology must be reflected by amendments to the original approved Method Statement. Amendments must be signed by both the ESM and RE, denoting that the change is environmentally acceptable. The Contractor must also sign the amended Method Statement.

All method statements will form part of the EMP documentation and are subject to all terms and conditions contained within the EMP main document. The Method Statement shall cover applicable details with regard to:

- Construction procedures;
- Materials and equipment to be used;
- How and where materials will be stored;

- The containment of accidental leaks or spills;
- Timing and location of activities; and
- Any other information deemed necessary by the ESM.

A method statement describes the scope of the intended work in a step-by-step description in order for the ESM or Engineer to understand the Contractor's intentions. This will enable them to assist in devising any mitigation measures, which would minimise environmental impact during these tasks. The method statement should also clearly stipulate mitigation methods of the intended works, against which the contractor's performance will be measured. For each instance wherein it is requested that the Contractor submit a method statement to the satisfaction of the ESM and Engineer, the format should clearly indicate the following:-

- **What** - a concise, description of the task/work to be undertaken;
- **How** - a detailed description of the process of work, methods, materials and mitigation strategies;
- **Where** - a description/sketch map of the locality of work (if applicable); and
- **When** - the sequencing of actions with due commencement dates and completion date estimates.

The Contractor must submit the method statement two weeks before any particular construction activity is due to start, especially with respect to impacts on sensitive ecosystems. Work may not commence until the method statement has been accepted by the ESM and Engineer, and clearly communicated to the workforce. The Contractor shall, except in the case of emergency activities, allow 14 days for consideration and approval of the Method Statement. The RE or ESM may require changes to a Method Statement if the proposal does not comply with the specifications or if, in the reasonable opinion of the RE or ESM, the proposal may result in damage to the environment in excess of that permitted by the specifications. Approved Method Statements shall be communicated to all relevant personnel.

All Method Statements listed below, shall be provided by the Contractor before the activity commences:

- Bunding
  - Method of bunding for static plant and bulk fuel storage.
  - Camp establishment and fencing
- Location and layout of the Contractor's Camp.
  - Method of installing fences required for working areas and Contractor's Camp.
- Concrete batching

- Location, layout and preparation of concrete batching facilities, including the methods employed for mixing of concrete including the management of runoff water from such areas.
- Bulk earthworks
  - Location, layout, silt/sediment management and the management of runoff from bulk earthworks areas.
- Demolition
  - Proposed method of demolition, including handling and disposal of materials.
- Dust
  - Dust control protocol.
- Fire and hazardous substances
  - Handling and storage of hazardous wastes.
  - Emergency spillage procedures and compounds to be used.
  - Emergency procedures for accidental fire.
  - Methods for the disposal of hazardous materials.
  - Fuels and fuel spills
  - Methods of refuelling vehicles.
- Details of methods for fuel spills and clean-up operations.
- Protection of archaeological resources
  - Methods for dealing with archaeological resources in the event that any are found.
- Protection of environmentally sensitive resources (fauna and flora)
  - Methods for dealing with areas identified as environmentally sensitive requiring protection.
  - Details of methods dealing with the identification, transportation and transplanting of flora species of conservation value.
  - Details of methods dealing with the identification, capture and relocation of fauna species of conservation value.
- Rehabilitation
  - Rehabilitation of disturbed areas after construction is complete.

- Solid waste management
  - Solid waste control and removal of waste from Site.
- Sources of materials
  - Details of materials imported to the Site (where applicable).
- Topsoil handling and stockpiling
  - Details on stripping, handling and stockpiling of topsoil.
- Wash areas
  - Location, layout, preparation and operation of all wash areas.
- Storm water management
  - Details of how storm water is to be handled on Site.

See **Appendix A** for example of a Method Statement.

#### **5.1.4 Monthly Monitoring Reports**

Copies of the monthly monitoring reports compiled by the ESM should be kept on site for inspection.

#### **5.1.5 Other Documents**

A list of other reports to be kept on site is -

- Final design documents and diagrams issued to and by the Contractor.
- All communications detailing changes of design/scope that may have environmental implications.
- Occupational Health and Safety reports.
- Complaints register.
- Incident and accident reports.
- Emergency preparedness and response plans.
- Crisis communication manual.
- Monthly site meeting minutes during construction.
- Environmental Forum's minutes of meetings.
- All relevant permits.
- All method statements from the Contractor.

## 5.2 Non Compliance and Penalties

The ESM shall issue the Contractor a notice of non-compliance whenever transgressions are observed. The contractor/s shall act immediately when such notice of non-compliance is received and correct whatever is the cause for the issuing of the notice. Complaints received regarding activities on the construction site pertaining to the environment shall be recorded in a dedicated register and the response noted with the date and action taken.

Failure to redress the cause shall be reported to the Environmental Forum for them to deal with the transgression, as it deems fit.

The Contractor is deemed not to have complied with the EMP if, inter alia:

- There is evidence of contravention of the EMP specifications within the boundaries of the construction site, site extensions and roads;
- There is contravention of the EMP specifications which relate to activities outside the boundaries of the construction site;
- Environmental damage ensues due to negligence;
- Construction activities take place outside the defined boundaries of the site; and/or
- The Contractor fails to comply with corrective or other instructions issued by the ESM and/or Engineer within a specific time period.

It is recommended that the engineers/contractors institute penalties for the following less serious violations and any others determined during the course of work as detailed below:

- Littering on site.
- Lighting of illegal fires on site.
- Persistent or un-repaired fuel and oil leaks.
- Any persons, vehicles or equipment related to the Contractor's operations found within the designated "no-go" areas.
- Excess dust or excess noise emanating from site.
- Possession or use of intoxicating substances on site.
- Any vehicles being driven in excess of designated speed limits.
- Removal and/or damage to fauna, flora or cultural or heritage objects on site.
- Urination and defecation anywhere except at designated facilities.
- Where environmental damage is caused or a pollution incident, and/or failure to comply with any of the environmental specifications contained in the EMP, the Developer and/or Contractor shall be liable.



The following violations, and any others determined during the course of work, should be penalised:

- Hazardous chemical/oil spill and/or dumping in non-approved sites.
- Damage to sensitive environments.
- Damage to cultural and historical sites.
- Unauthorised removal/damage to indigenous trees and other vegetation, particularly in identified sensitive areas.
- Uncontrolled/unmanaged erosion.
- Unauthorised blasting activities (if applicable).
- Pollution of water sources.
- Unnecessary removal or damage to trees.

### **5.3 Environmental Completion Statement**

An Environmental Completion Statement will be prepared by the ESM for submission to the Proponent indicating completion of the project and compliance with the EMP and conditions. This statement will be prepared after the final audit following rehabilitation of the Site (see Appendix B – Rehabilitation Management Plan (RMP)).

### **5.4 Emergency preparedness**

The Contractor shall compile and maintain environmental emergency procedures to ensure that there will be an appropriate response to unexpected or accidental actions or incidents that will cause environmental impacts, throughout the construction period. Such activities may include, inter alia:

- Accidental discharges to water and land.
- Accidental exposure of employees to hazardous substances.
- Accidental veld or forest fires.
- Accidental spillage of hazardous substances.
- Specific environmental and ecosystem effects from accidental releases or incidents.

The emergency preparedness plan should be compiled and should include:

- Emergency organisation (manpower) and responsibilities, accountability and liability.
- A list of key personnel and contact details.

- Details of emergency services available (e.g. the fire department, spill clean-up services, etc.).
- Actions to be taken in the event of different types of emergencies.
- Incident recording, progress reporting and remediation measures required to be implemented.
- Information on hazardous materials, including the potential impact associated with each, and measures to be taken in the event of accidental release.

## **5.5 Financing of environmental control**

Financing of the environmental requirements as outlined in this document, apart from the appointment of the ESM and specialists, is the sole responsibility of the Contractor appointed by the Proponent. Therefore, it is accepted that the cost incurred for implementing this EMP by the Contractor would be allocated for in the tender document. Any responsibilities not defined in this document or where any uncertainties arise in this matter will be the responsibility of the Proponent.

## **5.6 Disputes and disagreements**

Any disputes or disagreements between role players on Site (with regard to environmental management) will be referred to the Environmental Forum. If no resolution on the matter is possible it must be presented to an outside party agreed by all parties involved or to the Department of Environmental Affairs for clarification.

## **5.7 Amendments to the EMP**

Any party involved with the project can suggest changes to the EMP via the ESM or RE. Such suggestions will be discussed with the Environmental Forum. Approved changes will be minuted and drafted into the existing EMP in the form of an appendix or amendments.

## **5.8 Construction Monitoring**

The ESM will carry the responsibility of monitoring the implementation of the EMP on Site, assisted by the RE. In this regard, the ESM will submit a monthly monitoring report to the DEA until after all rehabilitation work has been completed. A pro-forma monitoring report is contained in Appendix C.

The monthly report should include:

- A copy of the Monitoring Report (Appendix C);
- A description of exceptional conditions on site whether they be meteorological, personnel related, machinery related, or otherwise stipulated;

- A description of any environmental accident or developments which could potentially develop into a non-conformance event by the Contractor; and
- Minutes from the meetings.

Any non-compliance with the agreed procedures of the EMP is a transgression of the various statutes and laws that define the manner by which the environment is managed. Non-conformance identified during monitoring must be recorded.

This monitoring report must describe, in detail, the cause, nature and effects of any environmental non-conformance by the Contractor/s and could stand as evidence should legal action be required. If possible, photographs should also be included as evidence to substantiate the report. This report will also suggest mitigation measures to correct the non-conformance (if necessary) and contemplate revisions to any of the strategies used in the construction phase, whether they pertain to monitoring or to construction methods used on site. The non-conformance shall be documented and reported as part of the Monthly Monitoring Report.

### **5.9 Post-construction environmental audit**

A post-construction environmental audit must be carried out in accordance with the Rehabilitation Management Plan (Appendix B) and submitted to the Environmental Forum, in order to fulfil conditions of this EMP.

## 6 ENVIRONMENTAL SPECIFICATIONS

### 6.1 Scope

These specifications cover the requirements for controlling the impact of construction activities on the natural and social environment. However, because many of the activities associated with the operational, as well as decommissioning and closure phase are similar in nature these specifications, where applicable will apply to these project phases as well.

It should be noted that many of the specifications detailed are prescribed for a wide variety of activities which occur during a typical construction phase. Where specifications do not apply, they should be overlooked.

### 6.2 Construction

#### 6.2.1 Site Division

The ESM and Resident Engineer shall be advised of the area that the Contractor intends using for his site establishment. The Contractor's Camp shall occupy as small an area as possible, and no site establishment shall be allowed within 200m of any watercourse unless otherwise approved by the ESM.

The Contractor shall restrict all his activities, materials, equipment and personnel to within the specified area. A Method Statement detailing the location, layout and method of establishment of the Contractor's Camp (including all buildings, offices, lay down yards, plant wash areas, fuel storage areas, batching areas and other infrastructure required for the running of the project) shall be provided.

##### 6.2.1.1 Contractor's Camp

- The Contractor shall submit a Method Statement, indicating the layout and preparation of the Contractor's Camp (this shall include the positioning of any fuels/hazardous materials stores). The extent and location of the Contractor's Camp shall be indicated on the site plans to be approved by the Engineer and ESM.
- The planning and design for the Construction Camp must ensure that there is minimal impact on the environment. The following should apply –
  - The Construction Camp will be placed within an existing disturbed area as far as possible.
  - The Contractor's Camp shall be located in an area of low environmental and social sensitivity.
  - The construction camp must preferably be located away from the C14 (the road between Walvis Bay and the airport) to minimise visual impact.
  - Its final location shall be identified in consultation with the Engineer and ESM.

### **6.2.1.2 Vehicle Parking Area**

- All vehicles will be allocated a dedicated parking area in the Contractor's Camp.
- No storage of vehicles will be allowed outside of the designated area.

### **6.2.2 Aesthetics**

The Contractor shall take reasonable measures to ensure that construction activities do not have an unreasonable impact on the aesthetics of the area.

### **6.2.3 Cement and Concrete Batching**

#### **6.2.3.1 Location**

- Concrete shall not be mixed directly on the ground. Boards, plastic sheeting or other protective materials shall be used for this purpose.
- The concrete batching activity shall be located in an area of low environmental sensitivity to be identified and approved by the RE and ESM.
- The permitted location of a batching plant (including the location of cement stores and sand and aggregate stockpiles) shall be indicated on the Site layout plan and approved by the Engineer and ESM. A Method Statement indicating the layout and preparation of this facility is required in this regard.

#### **6.2.3.2 Maintenance**

- All wastewater resulting from batching of concrete shall be disposed of via the wastewater management system.
- The concrete batching works shall be kept neat and clean at all times. No batching activities shall occur on unprotected substratum of any kind.
- All runoff from batching areas shall be strictly controlled, and cement-contaminated water shall be collected, stored and disposed of at a site approved by the Engineer and ESM. "Dagga" boards, mixing trays and impermeable sumps shall be used at all mixing and supply points.
- Contaminated water storage facilities shall not be allowed to overflow and appropriate protection from rain and flooding shall be implemented.
- Contaminated water treatment on Site shall require a Method Statement.
- Unused cement bags are to be stored so as not to be effected by rain or runoff events.
- Used cement bags shall be stored in weatherproof containers to prevent windblown cement dust and water contamination. Used bags shall be disposed of on a regular basis via the solid waste management system, and shall not be used for any other purpose.

- Cleaning of equipment and flushing of mixers shall not result in pollution of the surrounding environment: Care shall be taken to collect contaminated wash water from cleaning activities and dispose of it in a manner approved by the RE and ESM.
- Suitable screening and containment shall be in place to prevent wind-blown contamination associated with bulk cement storage, loading and batching.
- With respect to exposed aggregate finishes, the Contractor shall collect all contaminated water and fine material, and store it in sumps for disposal at an approved waste-disposal site.
- All visible remains of excess concrete shall be removed on completion of the plaster or concrete pour work and disposed of. All excess aggregate shall also be removed

#### **6.2.4 Earthworks**

All earthworks shall be undertaken in such a manner so as to minimise the extent of any impacts caused by such activities. The Contractor/s shall take all reasonable measures to limit dust generation as a result of earthworks. Earthworks are to be phased so that no areas are left exposed for longer than is necessary. This is especially important during the rainy season where runoff causes siltation downstream and overall erosion and loss of topsoil, etc.

##### **6.2.4.1 Borrow pits**

If borrow pits are required, the Engineer need to obtain approval from the DEA. A Method Statement shall be required in this regard.

##### **6.2.4.2 Trenching**

Trenching for services shall be undertaken in accordance with the engineering specifications with the following environmental amplifications, where applicable:

- Soil shall be excavated and used for refilling trenches i.e. soil from the first trench shall be excavated and stockpiled, thereafter soil from the second excavated trench length shall be used to backfill the trench behind it once the services have been laid. The last trench shall be filled using the soil stockpiled from the first trench.
- Trench lengths shall be kept as short as practically possible before backfilling and compacting.
- Trenches shall be re-filled to the same level as (or slightly higher to allow for settlement) the surrounding land surface to minimise erosion.

### 6.2.4.3 *Drilling and Jack hammering*

- The Contractor/s shall ensure that no pollution results from drilling operations, either as a result of oil and fuel drips, or from drilling fluid. The Contractor/s shall take all reasonable measures to limit dust generation and noise as a result of drilling operations.
- Any areas or structures damaged by the drilling and associated activities shall be rehabilitated by the Contractor/s to the satisfaction of the ESM and Resident Engineer.
- The Contractor shall submit a Method Statement detailing his proposals to prevent pollution during drilling operations.

### 6.2.5 **Fencing**

It is important that excavation works are conducted within a limited area to facilitate control and to minimise impacts on the surrounding environment. The purpose of the fenced areas is to control construction and personnel activity within the designated areas, and limit unauthorised access.

- Where deemed necessary by the ESM or RE, sensitive areas shall be fenced off by the Contractor by means of a two-strand wire fence on which danger tape has been securely placed.
- Fencing of the labour campsite (if applicable) and construction area shall be suitably secured to prohibit access by livestock and local fauna. Full shade cloth demarcation of 1.8m in height is recommended for the Contractor's Camp.
- Fences will be constructed around Heritage resources (should these be present) to prevent access into such areas during construction.
- No unauthorised pedestrian or vehicular access shall be allowed into fenced, off-limit areas.
- If fencing is removed temporarily for the execution of work, the Contractor shall reinstate it as soon as practicable. Until re-instatement, the contractor shall demarcate the working area by surrounding it with danger-tape marking.
- Breaches in the fencing must be repaired immediately.
- The Contractor to the satisfaction of the RE and ESM shall erect and maintain all fencing. Such fences shall be erected before the start of any construction works.

### 6.2.6 **Access Routes**

Roads in the direct vicinity of the site will be subject to continual use by construction vehicles, particularly heavy vehicles, carrying construction materials, waste, etc.

Special care should be taken to prevent spillages on the roads. Vehicles should be equipped with drip trays to prevent oil and fuel spillages. In the event of spillages, it should be reported to the ESM and Resident Engineer immediately and cleaned as soon as possible.

Notices should be placed on visible locations in the vicinity of the construction site to warn public of construction activities and indicating that heavy vehicles may be using the road.

On the Site, the Contractor/s shall control the movement of all vehicles and plant machinery so that they remain on designated/demarcated routes.

- Existing roads will be used as far as possible. No temporary access roads will be permitted, unless negotiated with the ESM and Resident Engineer and Proponent.
- Any temporary roads required shall be decommissioned by the Contractor/s and rehabilitated using stockpiled topsoil.
- Topsoil shall be removed as described under 'Clearing and Grubbing' prior to the construction of the road/s.
- During construction of roads the Contractor/s shall protect all areas susceptible to erosion by installing all necessary temporary and permanent drainage works as soon as possible.

### **6.2.7 Clearing and Grubbing for Construction Purpose**

Clearing should first be discussed with the ESM and Resident Engineer before commencement and carried out in accordance with the Rehabilitation Management Plan (see Appendix B).

#### **6.2.7.1 Vegetation Clearance**

- The Contractor shall ensure that the clearance of vegetation is restricted to that required to facilitate the execution of the Works. Site clearance shall occur in a planned manner, and cleared areas shall be stabilised as soon as possible. The detail of vegetation clearing shall be to the ESM's approval.
- Areas that are, in the opinion of the RE and ESM, less stable, shall be stabilised immediately following vegetation clearance.
- The disposal of vegetation by burying or burning is prohibited. Cleared vegetative material shall:
  - be removed from Site and disposed of at an approved disposal site;
  - be chipped and mulched, where suitable.
- Vegetation shall be cleared mechanically. Care shall be taken to minimise the disturbance to topsoil during this process.



- During site clearance, any old concrete, rubble or refuse shall be removed from the Site, or stockpiled for disposal at an approved disposal site. All stockpiles shall be managed so as to avoid damage to vegetation.
- Where practical, indigenous plant material shall be kept separate from alien material.
- The vegetative material shall be reduced either by mechanical means (chipper) or by hand axing to sticks of no longer than 100 mm.
- The Contractor shall stabilise soil in unstable areas in order to control wind-blown dust and sand.
- The following methods shall be considered for soil stabilisation:
  - Mulch stabilisation
    - Mulch shall be applied by hand to achieve a layer of uniform thickness. The mulch shall then be lightly worked into the topsoil layer so that it mixes with the soil and serves to bind it.
    - The mulch shall be spread at a coverage rate of 100 kg per 250 m<sup>2</sup>.
    - Where brush-cut material is to be utilised as mulch, this material shall be evenly spread across the area to a uniform depth of 25mm. The mulch shall then immediately be rotated into the upper 100 mm layer of soil. This operation shall not be attempted when the wind strength is such as to remove the mulch before it can be rotated in.
    - If the area is exposed to strong wind (August winds in the case of the Site) the mulch stockpile shall be covered with a fine nylon net with 100mm x 100mm openings.
  - Straw stabilisation
    - Straw shall be utilised as a binding material in sandy areas. Baled straw shall be placed on the cleared area, opened and spread evenly by hand or machine at a coverage rate of 1 bale per 20 m<sup>2</sup> over the area to be stabilised. It shall then immediately be rotated into the upper 100 mm layer of soil. This operation shall not be attempted when the wind strength is such as to remove the straw before it can be rotated into the sand.
  - Stabilisation of steep slopes
    - The Contractor shall take measures to protect all areas susceptible to erosion by installing all the necessary temporary and permanent drainage works as soon as possible. The Contractor shall take any other measures that may be necessary to prevent surface water from being concentrated in streams and from scouring the slopes, banks or other areas.

- If erosion channels develop, they shall be back-filled and compacted, and the areas restored to a proper (stable) condition. The Contractor shall not allow erosion to develop on a large scale before effecting repairs.
  - Where artificial slope stabilisers are used, these should be applied to the slope before top soiling.
  - Near vertical slopes shall be stabilised using natural rock wall structures, stacked precast concrete blocks or rock-filled gabion baskets.
  - All structures shall have a 'natural' look and facilities for plants to grow in.
  - Where the slopes are 1:3 to 1:6 they should be logged or otherwise stepped (using stabilisation cylinders or similar) in order to prevent soil erosion. Logs/cylinders must be laid in continuous lines following the contours and spaced vertically 0.8-1.2 m apart, depending on the steepness of the slope. These logs/cylinders must be secured by means of steel pegs and wire in rocky areas, and treated wooden pegs in other areas.
- In areas where slopes are less than 1:6, horizontal grooves, shallow steps or ledges parallel to contours should be made on the cut slopes.
    - In areas where slopes are less than 1:6 these slopes should be stabilised by using logs in parallel rows, or stabilisation cylinders fastened randomly into position or using biodegradable netting. These structures shall hold the top-material on the slopes and serve as erosion prevention structures.
    - Shallow slopes shall be stabilised using commercial available and approved anti-erosion compounds.

#### **6.2.7.2 Conservation of Topsoil**

Refer to Rehabilitation Management Plan (Appendix B).

#### **6.2.8 Stockpiling**

- The ESM will identify suitable sites for stockpiling.
- Stockpiles shall be convex in shape, shall be no higher than 2 m and shall be located so as to cause minimal disturbance. Stockpiles shall be so placed to occupy minimum width compatible with the natural angle of repose of material, and measures shall be taken to prevent the material from being spread over too wide a surface. Where required, appropriate precautions shall be taken to prevent the erosion and limit the

compaction of the stockpiles. The Contractor shall ensure that all stockpiles do not cause the damming of water or run off, or is itself washed away.

- Top material stockpiles shall not be covered with any material (e.g. plastic) that may kill seeds or cause it to compost. If the stockpiles start to erode significantly or cause dust problems, they shall be covered with hessian. Where practical, top material shall not be left for longer than six to eight months before being used for rehabilitation. If stored for longer than six months, the Top material shall be analysed and, if necessary, upgraded before placement.

### 6.2.9 'No-go' Areas

- If so required by the Ecologist (if applicable), certain areas shall be considered "no go" areas. All areas outside the demarcated working areas and Contractor's Camp as well as areas on the Site identified as sensitive by the ESM and/or Ecologist, are 'no go' areas.
- The Contractor shall ensure that, insofar as he has the authority, no unauthorised entry, stockpiling, dumping or storage of equipment or materials shall be allowed within the "no go" areas.
- "No go" areas shall be demarcated with fencing consisting of wooden or metal posts at 3m centres with 1 plain wire strand tensioned horizontally at 900 mm from ground level. Commercially available danger tape shall be wrapped around the wire strand. The ESM shall maintain the fence for the duration of construction and ensure that the danger tape does not become dislodged.

### 6.2.10 Protection of Natural Features

- The Contractor shall not deface, paint, damage or mark any natural features (e.g. rock formations; natural depressions) situated in or around the Site for survey or other purposes unless agreed beforehand with the ESM and Landscape Architect/Ecologist. Any features affected by the Contractor in contravention of this clause shall be restored/ rehabilitated to the satisfaction of Ecologist.
- The Contractor shall not permit his employees to make use of any natural water sources (e.g. springs, streams, and open water bodies) for the purposes of swimming, personal washing and the washing of machinery or clothes.

### 6.2.11 Protection of Indigenous Fauna and Flora

- Except to the extent necessary for the carrying out of the works, flora shall not be removed, damaged or disturbed nor shall any vegetation be planted without authorisation. Disturbance and protection of fauna and flora within the boundaries of the Site must be done in accordance with the Method Statement.

- Where the use of herbicides, pesticides and other poisonous substances has been specified, they shall be stored, handled and applied with due regard to their potential harmful effects. The use of these substances should be kept to an absolute minimum.
- Collecting of wood and/or killing trees in the area for the purpose of fire wood is prohibited. Trapping, removal, harming and/or killing of animals (reptiles, amphibians, mammals, avian/birds) are forbidden.
- No domestic pets are permitted on Site.
- All alien vegetation identified along the route alignments (should such vegetation occur) should be cleared by the Contractor. An effort must be made to remove the entire root system, and the plant left to dry out on a hard surface to prevent seed germination.

### **6.2.12 Erosion and Sedimentation Control**

During construction works the Contractor shall protect all areas susceptible to erosion and siltation (e.g. canal embankments) by installing the necessary drainage or retaining works and by taking other measures necessary to prevent the surface water from being concentrated in streams and from scouring the embankments and depositing silt outside the demarcated work areas.

Any runnels or erosion channels developed during construction or during the defects liability period shall be backfilled and compacted, and the areas restored. Stabilisation of cleared areas to prevent and control erosion shall be actively managed. Traffic and movement over stabilised areas shall be restricted and controlled, and damage to stabilised areas shall be repaired and maintained to the satisfaction of the Engineer.

Anti-erosion compounds shall consist of an organic or inorganic material to bind soil particles together and shall be a proven product able to suppress dust and erosion. The method of stabilisation shall be determined in consultation with the Engineer and Ecologist.

Consideration and provision shall be made for the following methods (or combination):

- Brushcut packing.
- Mulch or chip cover.
- Straw stabilising (at the rate of one bale/20m<sup>2</sup> and, if required, additional straw should be added and rotated into the top 100 mm of the completed earthworks).
- Watering.
- Planting/sodding.
- Hand seeding sowing.
- Soil binders and anti-erosion compounds.

- Mechanical cover or packing structures, e.g. gabions and mattresses, geofabric, hessian cover, armourflex, log/pole fencing and retaining walls.

### **6.2.13 Landscaping and Rehabilitation**

Any areas that the Ecologist (if applicable) believes may have been impacted upon or disturbed shall be rehabilitated to his/her satisfaction, which includes all areas where top material has been stripped. Once construction is complete the Contractor shall clear everything from the Site not forming part of the Permanent Works. The area to be rehabilitated shall first be landscaped to match the topography of the surrounding area as it was prior to construction. The composition of vegetation to be used for any rehabilitation shall be as per the specifications from the Ecologist.

The Contractor may not use herbicides, pesticides, fertilisers or other poisonous substances for the rehabilitation process unless otherwise agreed with Ecologist.

All rehabilitated areas shall be considered “no go” areas and the Contractor shall ensure that none of his staff or equipment enters these areas.

The Contractor shall undertake to remove all alien vegetation re-establishing on the area and shall implement the necessary temporary or permanent measures to combat soil erosion.

#### **6.2.13.1 Vegetation Clearance**

- All cleared areas shall be stabilised as soon as possible. Areas that are, in the opinion of the Ecologist, less stable, shall be stabilised immediately following vegetation clearance. It is recommended that a phased vegetation clearance plan and strategy be drafted, accompanied with a map.
- The disposal of vegetation by burying or burning is prohibited. Cleared vegetative material shall:
  - be removed from Site and disposed of at an approved disposal site;
  - be chipped and mulched, where suitable.
- Vegetation shall be cleared mechanically. Care shall be taken to minimise the disturbance to topsoil during this process.
- During site clearance, any old concrete, rubble or refuse shall be removed from the Site, or stockpiled for disposal at an approved disposal site. All stockpiles shall be managed so as to avoid damage to vegetation.
- Where practical, indigenous plant material shall be kept separate from alien material.
- The vegetative material shall be reduced either by mechanical means (chipper) or by hand axing to sticks of no longer than 100 mm.
- All indigenous vegetation cleared from the Site shall be collected for later use.

- Where appropriate, with permission from the Ecologist, the indigenous material shall be collected simultaneously with the topsoil.
- The Contractor shall store the mulched vegetation in bags. The bags shall be approved by the Ecologist and shall allow air to pass through the enclosed material. Mulch shall be protected from wetting.
- Subject to the approval of the Ecologist, seed-free material from exotic invasive plants shall be chipped and used to prepare mulch.
- The Contractor shall stabilise soil in unstable areas in order to control wind-blown dust and sand.

### **6.2.13.2 Time of Planting**

- The Contractor shall not begin planting work until all construction activities in the area to be revegetated have been completed.
- Reseeding and replanting shall occur at a time as indicated by the Ecologist by taking the summer rainfall period of the area into account.
- If planting occurs in the dry periods it shall be necessary to irrigate plants to ensure their successful establishment.

### **6.2.13.3 Re-vegetation**

- The area shall be revegetated as follows:
  - The surface shall be levelled by hand or machine as far as practically possible.
  - Alien vegetation shall be cleared by cutting the plants off at ground level, and painting the stump with 0.5% Garlon in diesel.
  - For areas with a slope of greater than 1:3, straw shall be utilised as a binding material to stabilise the soil during re-vegetation and rehabilitation of the site. Straw shall consist of natural, dried fibres of hay or chaff of various lengths between 50 mm and 400 mm, delivered to Site in bales and shall be applied evenly by hand or machine at a rate of 1 bale per 20 m<sup>2</sup> over the area to be revegetated. It shall then immediately be rotated into the upper 100 mm layer of soil.
  - The prepared area shall be hydro- or hand-seeded at a rate of 40 kg/ha using *Cenchrus ciliaris* (buffalo grass). In the event of hand-seeding, the seed mixture as specified shall be mixed with two parts per volume of clean dry plaster sand, then divided in half and applied evenly in two successive applications, one after the other, by means of an approved hand seeding machine. On completion of the seeding the surface shall be lightly raked to cover the seed with no more than 5 mm of soil.

- Water used for the irrigation of vegetated areas shall be free of pollutants that will have a detrimental effect on the plants. The vegetated area shall only be watered once, immediately following seeding. Watering should be carried out from a tanker, using a fine nozzle spray to avoid erosion and disturbance of the vegetation. Water for irrigation purposes may not be drawn from any water body.

#### **6.2.13.4 Soil Stabilisation**

The same methods as discussed under point 6.2.7 above will be applicable.

#### **6.2.14 Protection of Archaeological and Paleontological Remains**

Archaeological sites are protected by the National Heritage Act No 27 of 2004. Generally, it is an offence to disturb, destroy or remove from its original site any archaeological material, or excavate any such site without permission.

The Contractor shall take reasonable precautions to prevent any person from removing or damaging any fossils, coins, articles of value or antiquity and structures and other remains of archaeological interest discovered on the Site, immediately upon discovery thereof and before removal.

Should any archaeological materials works shall cease immediately and the area shall be cordoned off until such time as the ESM authorises resumption of construction in writing. The ESM shall immediately report the findings to the National Monuments Council. The latter will inspect the area within 24 hours of a find being reported (to prevent unnecessary delays in works) and make further recommendations. Mitigation measures should be implemented if required. For detailed guidance see Appendix E – Chance Find Procedure.

#### **6.2.15 Safety**

Relevant occupational Health and Safety requirements shall be adhered to. Telephone numbers of emergency services, including the fire safety officer, shall be displayed conspicuously in the Contractor's office near a telephone. No firearms are permitted.

Staff must be made aware of their responsibilities to ensure that impacts such as fire, safety and pollution are taken care of. This must form part of the Environmental Education. The movement of construction workers must be controlled and access to adjacent properties must be prohibited.

The Contractor's personnel must be adequately trained and informed in the tasks that they are expected to perform. This is required for their own safety as well as the safety of colleagues and other interested and/or affected parties.

All excavated areas and/or holes should be clearly demarcated.

### **6.2.16 Fire Control**

No fires may be lit on site. Any fires that occur shall immediately be reported to the ESM.

Smoking shall not be permitted in those areas where it is a fire hazard. Such areas shall include the workshop and fuel storage areas and any areas where the vegetation or other material is such as to make liable the rapid spread of an initial flame. Cigarette butts must be disposed of in designated containers.

In terms of the Atmospheric Pollution Prevention Act (No. 45 of 1965), burning is not permitted as a disposal method.

The Contractor shall appoint a competent fire safety officer who shall be responsible for ensuring immediate and appropriate actions in the event of a fire and shall ensure that employees are aware of the procedure to be followed. The Contractor shall ensure that there is basic fire-fighting equipment (e.g. fire buckets, extinguishers, fire beaters, etc.) available on Site at all times. This shall include at least rubber beaters when working in urban open spaces and one fire extinguisher of the appropriate type when welding or other “hot” activities are undertaken.

Open fires for cooking purpose are not allowed, except within the Contractor’s camp under controlled conditions.

### **6.2.17 Emergency Procedures**

The Contractor’s procedures for the following emergencies shall include:

#### **6.2.17.1 Fire**

- The Contractor shall inform all relevant parties of a fire as soon as one starts and shall not wait until it can no longer be controlled.
- The Contractor shall ensure that his employees are aware of the procedure to be followed in the event of a fire.

#### **6.2.17.2 Accidental Leaks and Spillages**

- The Contractor shall ensure that his employees are aware of the procedure to be followed for dealing with spills and leaks, which shall include notifying the ESM and Resident Engineer.
- The Contractor shall ensure that the necessary materials (e.g. chemcap, spill-sorb, drizzat pads, enretch and peat moss) and equipment for dealing with spills and leaks are available on Site at all times.
- The source of the spillage shall be isolated. The Contractor shall contain the spillage using sandbags, pre-made booms, saw dust or absorbent materials. Treatment and



remediation of the spill areas shall be undertaken to the reasonable satisfaction of the ESM and Resident Engineer.

### **6.2.18 Community Relations**

The Contractor shall erect and maintain information boards in the position, quantity, design and dimensions specified. Such boards shall include contact details for complaints by members of the public in accordance with details provided by the Engineer. The Contractor shall also keep a "Complaints Register" on Site. The Register shall contain all contact details of the person who made the complaint, and information regarding the complaint itself.

### **6.2.19 Construction Personnel Information Posters**

The Contractor shall erect and maintain information posters for the information of his employees depicting actions to be taken to ensure compliance with aspects of the specifications. Such posters shall be erected at the eating areas, 'no go' areas and any other locations specified by the Resident Engineer and/or ESM.

### **6.2.20 Temporary Site Closure**

If the Site is closed for a period exceeding one week, the following checklist procedure shall be carried out by the Contractor in consultation with the ESM and Resident Engineer. Contractor's Safety Officers (in terms of the relevant Occupational Health and Safety Act) to check the Site and report.

#### **6.2.20.1 Fuels/flammables/hazardous materials stores**

- Ensure fuel stores as low in volume as possible.
- No leaks.
- Outlet secure/locked.
- Bund empty (where applicable).
- Fire extinguishers serviced and accessible.
- Secure area from accidental damage, e.g. plant collision.
- Emergency and contact numbers to be available and displayed.
- Adequate ventilation.

#### **6.2.20.2 Safety**

- All trenches and manholes secured.
- Fencing and barriers in place as per the relevant Occupational Health and Safety Act.
- Notice boards applicable and secured.
- Emergency and management contact details displayed.

- Security persons briefed and have facility for contact.
- Fire hazards identified.
- Scaffolds secure.
- Inspection schedule and log by security staff.

#### **6.2.20.3 Erosion and siltation**

- Wind and dust mitigation in place.
- Stockpiles at stable angle.
- Detention ponds or channels in place.
- Erosion protection measures in place.
- Revegetated areas watering schedules and supply secured.

#### **6.2.20.4 Water contamination and pollution**

- Fuels hazardous stores secure.
- Cement and materials stores secured.
- Toilets empty and secured.
- Refuse bins empty and secured (lids).
- Bunding clean and treated.
- Drip trays empty and secure (where possible).
- Structures vulnerable to high winds secure.

### **6.3 Materials**

#### **6.3.1 Hazardous Substances**

Petroleum, chemicals, harmful and hazardous waste shall be stored in an enclosed and banded area. This area shall be subject to the approval of the Engineer. The waste shall be disposed of at a hazardous waste disposal site as approved by the ESM.

#### **6.3.2 Handling, Use and Storage of Construction Materials**

The Contractor shall ensure that delivery personnel are informed of all procedures and restrictions (including 'no go' areas) required to comply with the Specifications. The Contractor shall ensure that delivery personnel are supervised during offloading by someone with an adequate understanding of the requirements of the Specifications.

Materials shall be appropriately secured to ensure safe passage between destinations. Loads including, but not limited to sand, stone chip, cement and refuse, shall have appropriate

cover to prevent them spilling during transit. The Contractor shall be responsible for any clean-up resulting from the failure by his employees or suppliers to properly secure transported materials.

All manufactured and/or imported material shall be stored within the Contractor's Camp, and, if so required, out of the rain. All lay down areas outside of the Contractor's Camp shall be subject to the ESM's approval, which shall not unreasonably be withheld.

#### **6.3.2.1 Importation of fill/soil/sand materials**

- Imported materials shall be free of weeds, seeds, litter and contaminants.
- Sources of imported material shall be listed and approved by the ESM and Resident Engineer.
- Stockpile areas will be identified by the Resident Engineer and agreed upon by the ESM before any stockpiling commences.

#### **6.3.2.2 Topsoil**

Refer to Rehabilitation Management Plan (Appendix B).

#### **6.3.2.3 Spoil material**

- The location of spoil stockpiles shall be identified by the Engineer and agreed upon by the ESM prior to any stockpiling.
- No spoil material shall be dumped outside the defined site unless it is being removed from the Site, as approved by the ESM and Resident Engineer.
- Spoil stockpiles shall be convex and should not exceed 2m in height. The Contractor shall ensure that the spoil material does not blow or wash away. If it is in danger of being washed or blown away, the Contractor shall cover it with a suitable material, such as hessian or plastic.

#### **6.3.2.4 Shrubs and trees**

- The Contractor shall ensure that all necessary precautions are taken to ensure that the plants arrive on Site in a proper condition for successful growth.
- Trucks used for transporting plants shall be equipped with covers to protect the plants from windburn. Containers shall be in a good condition. Plants shall be protected from wind during the transportation thereof.
- The Ecologist shall ensure that the plants are in a good condition and free from plant diseases and pests. The Ecologist in support of the Contractor shall immediately remove plants containing any diseases and/or pests from the Site.

- There shall be sufficient topsoil around each plant to prevent desiccation of the root system. Where plants are stored on Site prior to planting they shall be maintained to ensure that the root systems remain moist.

## 6.4 Construction Plant

### 6.4.1 Fuel and Oil

If so required, fuel may be stored on Site in a depot complying with the requirements listed below. Where reasonably practical, construction vehicles and equipment shall be refuelled at the depot or at the workshop as applicable. The surface under the refuelling area shall be protected (bund) against pollution to the satisfaction of the Resident Engineer and ESM prior to any refuelling activities.

The Contractor shall ensure that there is always a supply of absorbent material (e.g. chemcap, spill-sorb, drizzat pads, enretech and peat moss) readily available to neutralise and where possible be designed to encapsulate minor spillage. The quantity of such materials shall be able to handle a minimum of 200 l of liquid spill.

#### 6.4.1.1 Fuel storage areas

- The ESM and Resident Engineer shall be advised of the area that the Contractor intends using for the storage of fuel. Fuels shall be stored at a suitable location inside the Contractor's Camp.
- The fuel storage area must not be located near (i.e. less than 250m) any water resource, including a river, stream or surface water body, or borehole.
- The Contractor shall ensure that all liquid fuels (petrol and diesel) are stored in tanks with lids, which are kept firmly shut.
- The tanks shall be situated on a smooth impermeable surface (250 µm plastic or concrete) base with an earth bund (plastic must have a 5cm layer of sand on top to prevent perishing). The impermeable lining shall extend to the crest of the bund and the volume inside the bund shall be 110% x the total capacity of all the storage tanks.
- The floor shall be bunded and sloped towards a sump to contain any spillages of substances. The bund shall be inspected and emptied daily, and serviced when necessary. The bund shall be closely monitored during rain events to ensure that it does not overflow.
- The Contractor shall keep fuel under lock and key at all times. No smoking shall be allowed in the vicinity of fuel tanks.
- The Contractor shall educate workers on the appropriate methods for workshop maintenance and fuel points to prevent fuel and oil being washed out of containment areas.

- Only empty and externally clean tanks may be stored on the bare ground. All empty and externally dirty tanks shall be sealed and stored on an area where the ground has been protected. In addition, if fuel is dispensed from 200 l drums, the proper dispensing equipment shall be used, and the drum shall not be tipped in order to dispense fuel. The dispensing mechanism of the fuel storage tank shall be stored in a waterproof container when not in use.
- Symbolic safety signs depicting “No Smoking”, “No Naked Lights” and “Danger” are to be provided, and are to conform to the requirement of SABS 1186.
- The product contained within the tank shall be clearly identified; using the emergency information system detailed in SABS 0232 part 1.
- Any electrical or petrol-driven pump shall be equipped and positioned, so as not to cause any danger of ignition of the product.
- Areas for storage of fuels and other flammable materials shall comply with standard fire safety regulations and may require the approval of the fire safety officer.
- The Contractor shall ensure that there is adequate fire-fighting equipment at the fuel stores and that staff are adequately trained to use this equipment.

#### **6.4.1.2 Fuel storage tanks**

- Temporary above ground storage tanks may be permitted at the discretion of the ESM and Resident Engineer based on the merit of the situation, provided that the following requirements are met:
- All such tanks are to be designed and constructed in accordance with a recognised Act and code (Petroleum Product and Energy Act, No. 13 of 1990, as amended).
- The rated capacity of such a tank shall provide sufficient capacity to permit expansion of the product contained therein by the rise in temperature during storage.
- The tank shall be erected at least 3.5 m from buildings, boundaries and any other combustible or flammable materials.
- Adequate precautions shall be provided to prevent spillage during the filling of any tank.
- Soil contaminated by oil, fuel or chemicals shall be removed and disposed of at a registered Hazardous Waste Disposal Site or rehabilitated in-situ.
- If larger capacity tanks are required then an acceptable rational design based on a relevant national or international code or standard shall be submitted to the Directorate Energy, Petroleum and Downstream (Ministry of Mines and Energy).

### **6.4.2 Ablution Facilities**

Washing, whether of the person or of personal effects and acts of excretion and urination are strictly prohibited other than at the designated facilities provided. Provision shall thus be made for ablution and washing facilities.

The exact location of the facilities shall be approved by the ESM and Resident Engineer prior to establishment. All temporary portable toilets shall be secured to the ground to prevent them toppling due to wind or any other cause.

Toilets supplied by the Contractor for the workers shall occur at a maximum ratio of 1 toilet per 30 workers (preferred 1:15) and be within walking distance of the staff. These facilities shall be maintained in a hygienic state and serviced regularly. Toilet paper shall be provided. The Contractor shall ensure that toilets are emptied regularly, as well as before the builders' holidays. The Contractor shall ensure that no spillage occurs when the toilets are cleaned or emptied and that the contents are removed from Site. Discharge of waste from toilets into the environment is prohibited.

### **6.4.3 Eating Area**

The Contractor shall provide bins with lids at the eating areas for his staff, which shall be emptied on a daily basis. The waste may be temporarily stored inside the Contractor's Camp in a facility that is weatherproof and scavenger-proof and which has been approved by the Engineer. The feeding or discarding of food for animals is strictly prohibited.

### **6.4.4 Solid Waste Management**

No burying or dumping of any waste materials, rubble, vegetation or refuse shall occur on Site. The Contractor shall set up a solid waste control and removal system to fit into the larger Project waste management system. The waste may be temporarily stored on Site in a central waste area that is weatherproof and scavenger-proof, and which the ESM and Resident Engineer have approved. The accumulation of construction waste materials must be avoided as far as possible. The system shall comply with the following detailed requirements:

#### **6.4.4.1 Dumping**

- Receipts for hazardous waste disposal shall be copied to the ESM and Engineer.
- Refuse shall be disposed of into scavenger- (baboons, dogs, rodents, etc.) and weather-proof bins. The Contractor shall then remove the refuse collected from the working areas, from Site at least once a week or depending on necessity.
- Refuse must be disposed of at an authorised landfill site.
- The Contractor shall make provision for workers to clean up the Contractor's Camp and working areas at least once a week.

#### **6.4.4.2 Recycling**

- Wherever possible, materials used or generated by construction shall be recycled.
- Containers for glass, paper, metals and plastics shall be provided (a four bin recycling system). Office and camp areas are particularly suited to this form of recycling process.
- Where possible and practical, such as at stores and offices, waste shall be sorted for recycling purposes.

#### **6.4.5 Waste Water Management**

The Contractor shall set up a contaminated water management system, which shall include collection facilities to be used to prevent pollution, as well as suitable methods of disposal of contaminated water to fit into the larger waste water management system. The Contractor shall prevent the discharge of water contaminated with any pollutants, such as soaps, detergent, cements, concrete, lime, chemicals, glues, solvents, paints and fuels, into the environment. The Contractor shall notify the ESM and Resident Engineer immediately of any pollution incidents on Site.

Water from kitchens, showers, sinks, etc. shall be discharged into a conservancy tank for removal from Site. Runoff from fuel depots/workshops/truck washing areas and concrete swills shall be directed into a conservancy tank and disposed of at an approved municipal hazardous waste site.

Wash areas shall be placed and constructed in such a manner so as to ensure that the surrounding areas are not polluted. This includes, but is not limited to, concrete batching areas, vehicle washing, workshop wash bays, paint wash and cleaning. Wash areas for domestic use shall ensure that the disposal of contaminated water is sanctioned by the ESM.

#### **6.4.6 Workshop, Equipment Maintenance and Storage**

Where practical, all maintenance of plant and equipment on Site shall be performed in the workshop. If it is necessary to do maintenance outside of the workshop area, the Contractor shall obtain the approval of the ESM prior to commencing activities.

All plant and equipment shall be kept in good working order and serviced regularly. Equipment shall be removed immediately from the Site and repaired. When the Contractor carries out emergency plant maintenance it is essential that there is no pollution to the environment. This will be overseen by the ESM and Resident Engineer.

The workshop shall have a smooth impermeable (concrete or 250 µm plastic covered with sand) floor, which is bunded and sloped towards an oil trap to contain any spillages. When servicing equipment, drip trays shall be used to collect the waste oil and other lubricants. The

floor shall be bunded and sloped towards an oil trap or sump to contain any spillages of substances (e.g. oil). Drip trays shall also be provided in construction areas for stationary plant (such as compressors) and for "parked" plant (such as scrapers, loaders, vehicles). Drip trays shall be inspected and emptied daily. Drip trays shall be closely monitored during rain events to ensure that they do not overflow. Where practical, the Contractor shall ensure that equipment is covered so that rainwater is excluded from the drip trays.

All washing shall be restricted to a minimum. If essential, washing must be undertaken in the workshop or maintenance areas. The use of detergents for washing shall be restricted to low phosphate and nitrate containing and biodegradable-type detergents. Runoff should be collected, contained and disposed of at an approved municipal hazardous waste site.

#### **6.4.7 Contractor's Camp maintenance**

The Contractor's Camp shall be kept neat and clean at all times. Waste and litter shall be disposed of into designated containers, which shall be emptied regularly by the Contractor. Waste materials shall be transported off the Site according to acceptable standards and procedures.

##### **6.4.7.1 Drip trays and bunding**

- All plant or machinery, which includes but is not limited to generators, pumps, compressors, drill rigs, static plant, shall have drip trays strategically placed to catch incidental spills.
- Drip trays shall be inspected and emptied daily, and serviced when necessary. Drip trays shall be closely monitored during rain events to ensure that they do not overflow.
- All repairs done on machinery using hydrocarbons as fuels or lubricants shall have a drip tray placed strategically to avoid incidental spillage.
- All static plant (stationary >6 months) shall be located within a bunded area. The bunded area should have a smooth impermeable surface with an earth bund.

#### **6.4.8 Noise**

Construction activities can cause environmental noise pollution. A disturbing noise is one that exceeds the zone sound level or the ambient sound level by 7 dB or more. A noise nuisance is defined as meaning "any sound that disturbs or impairs or may disturb or impair the convenience or peace of persons". This includes the use of power tools, movement of vehicles, etc.

The Contractor shall limit noise levels (e.g. install and maintain silencers on machinery). Appropriate directional and intensity settings are to be maintained on all hooters and sirens. No amplified music shall be allowed on Site. The use of radios, tape recorders, compact disc players and television sets shall not be permitted unless the volume is kept sufficiently low.



Where excess noise generation is unavoidable, the Contractor shall, by means of barriers, effectively isolate the source of any such noise in order to comply with the said regulations.

The following specific measures must therefore be adhered to:

- Limit construction times to the following hours:
  - 07:00 to 18:00 during the week (Monday to Friday);
  - 08:00 to 17:00 on Saturdays, and
  - No noisy activities on a Sunday.
- Should blasting be required during the construction phase, the necessary permits must be obtained from the local authority and any other relevant authority.
- The contractor must comply with all applicable occupational health and safety requirements.
- Blasting times must be limited to the hours from 08:00 to 17:00 during weekdays only.
- Screen construction activities from residential, social and business entities with soil berms to limit noise.

#### **6.4.9 Dust**

The Contractor shall take all reasonable measures to minimise the generation of dust as a result of construction activities to the satisfaction of the Engineer and ESM.

The Contractor's dust management planning shall, as a minimum, take cognisance of the following:

- Schedule of spraying water on unpaved roads paying due attention to control of runoff.
- Speed limits for vehicles on unpaved roads and minimisation of haul distances.
- Measures to ensure that material loads are properly covered during transportation.
- Schedule for wheel cleaning and measures to clean up public roads that may be soiled by construction vehicles.
- Minimisation of the areas disturbed at any one time and protection of exposed soil against wind erosion, e.g. by dampening with water or covering with straw.
- Location and treatment of material stockpiles taking into consideration prevailing wind directions and location of sensitive receptors.
- Reporting mechanism and action plan in case of excessive wind and dust conditions.
- Removal of any vegetation shall be avoided as far as possible, while handling and transport of erodible materials shall be avoided under high wind conditions.

- During high wind conditions, the ESM and Resident Engineer will evaluate the situation and make recommendations as to whether dust-damping measures are adequate, or whether working will cease altogether until the wind speed drops to an acceptable level. Where possible, stockpiles shall be located in sheltered areas. Where erosion of stockpiles becomes a problem, erosion control measures shall be implemented at the discretion of the ESM and Resident Engineer.
- Appropriate dust suppression measures shall be used when dust generation is unavoidable, e.g. straw, brush packs and chipping, particularly during prolonged dry periods in summer. Such measures shall also include the use of temporary stabilising measures (e.g. chemical soil binders and dustex).

#### **6.4.10 Lights**

The Contractor shall ensure that any lighting installed on the site for his activities does not interfere with road traffic or cause a reasonably avoidable disturbance to the surrounding community or other users of the area.

#### **6.4.11 Site Structures**

All site establishment components (as well as equipment) shall be positioned to limit visual intrusion on neighbours and the size of area disturbed. The type and colour of roofing and cladding materials to the Contractor's temporary structures shall be selected to reduce reflection.

#### **6.4.12 Groundwater**

The abstraction of groundwater for use during the construction (if applicable) phase should precede an approval from Water Affairs with the Ministry of Agriculture, Water and Forestry.

### **6.5 Post Construction**

Refer to Rehabilitation Management Plan (Appendix B).

### **6.6 Compliance with requirements and penalties**

Environmental management is concerned not only with the final results of the Contractor's operations to carry out the works but also with the control of how those operations are carried out. Tolerance with respect to environmental matters applies not only to the finished product but also to the standard of the day-to-day operations required to complete the works. It is thus required that the Contractor shall comply with the environmental requirements on an on-going basis and any failure on his part to do so will entitle the ESM to certify the imposition of a fine subject to the details set out below. Moneys from fines/penalties will be managed and allocated at the discretion of the Environmental Forum.

### 6.6.1 Penalties

Penalties will be issued for certain transgressions. Penalties may be issued per incident and per individual at the discretion of the ESM and Resident Engineer. Such penalties shall be issued in addition to any remedial costs incurred as a result of non-compliance with the environmental Specifications.

The ESM will inform the Contractor of the contravention and the amount of the penalty, and will be entitled to deduct the amount from monies due under the Contract.

Spot fines of between N\$1,000.00 and N\$10,000.00, including but not limited to those activities detailed below, shall be imposed by the ESM and Resident Engineer on the Contractor for contraventions of the environmental specifications by individuals or operators employed by the Contractor and/or his subcontractors. Where there are ranges, the amount shall depend on the severity and extent of the damage done to the environment:

TRANSGRESSION	AMOUNT (N\$)
Person walking outside the demarcated boundaries of the site	1,000.00
An individual operating any plant outside the boundaries of the Site	3,000.00 to 10,000.00
An individual driving off earmarked roads, outside the boundaries of the Site or within a 'no-go' area	10,000.00
A plant operator ignoring a verbal warning to have an oil leak from his machinery .repaired	1,000.00
An individual littering on Site	1,000.00
An individual not making use of the ablution facilities	1,000.00
An individual making an illegal fire on Site	2,000.00
An individual polluting the environment due to poor waste management, cement mixing on bare ground, paint washing, etc.	5,000.00 to 10,000.00

For each subsequent similar offence committed by the same individual, the fine shall be doubled in value to a maximum value of N\$ 20,000.00. Repeat offenders may also face disciplinary and/or legal action and/or dismissal.

### 6.6.2 Penalty Fines

Where the Contractor inflicts non-repairable damage upon the environment or fails to comply with any of the environmental specifications, he shall be liable to pay a penalty fine over and above any other contractual consequence.

The Contractor is deemed NOT to have complied with these specifications if:

- within the boundaries of the Site, site extensions and access routes there is evidence of contravention of these specifications;
- environmental damage ensues due to negligence;
- fails to comply with corrective or other instructions issued by the Engineer within a specific time; and
- fails to respond adequately to complaints from the public. The amount of penalty shall be determined by the ESM and Resident Engineer.

Payment of any fines in terms of the contract shall not absolve the offender from being liable from prosecution in terms of any law.

The following penalties are suggested for transgressions:

TRANSGRESSION	PENALTIES
Erosion and siltation	A penalty equivalent in value to the cost of rehabilitation plus 20%.
Unnecessary damage to vegetation outside the demarcated works area (no-go areas)	A penalty equivalent in value to the cost of rehabilitation plus 20%.
Unnecessary damage to archaeological material	A penalty to a maximum of N\$10,000.00 shall be paid for any damage to archaeological material without permission.
Injuring or killing of wildlife	A penalty to a maximum of N\$10,000.00 shall be paid for any wildlife injured or killed. The Contractor shall also be liable for all the costs of rehabilitation to all wildlife if they become injured as a direct result of neglect at the Site.

### 6.6.3 Removal from Site and Suspension of Works

The Engineer in consultation with the ESM and approved by the Environmental Forum may instruct the Contractor to remove from Site any person(s) who in their opinion is guilty of misconduct, or is incompetent, negligent or constitutes an undesirable presence on Site. These Specifications requires that all Plant be in good working order, and accordingly the Engineer may order that any Plant not complying with the Specifications be removed from Site. Where the ESM and Resident Engineer deem the Contractor to be in breach of any of

the requirements of this Specification, he may order the Contractor to suspend the progress of the Works or any part thereof.

## **6.7 Measurement and Payment**

No separate measurement and payment will be made to cover the costs of complying with the EMP and such costs shall be deemed to be covered by the rates tendered for the items in the Schedule of Quantities completed by the Contractor when submitting his tender.

## **6.8 Mitigation Measures and Proposed Management Programme**

The table below outlines those specific mitigation measures required with respect to planning and design considerations, construction and operations in order to fulfil the recommendations outlined in the scoping report. These measures must be implemented during the construction phase of the proposed upgrade of the Rooikop pipeline; the responsibility for these measures is included in Column IV.

While responsibilities have been assigned to various other parties, it must be borne in mind that ultimately the Proponent are held responsible for any damage to the environment as a result of the development and that non-compliance with the EMP will be regarded as non-compliance in terms of the ECC.

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
<b>PLANNING AND DESIGN</b>				
Storage/disposal of asbestos cement pipeline.	Ensure that the disconnected asbestos cement (AC) pipeline is stored/disposed of in a manner which minimises potential respiratory health risks associated with the friable (i.e. crumbly) asbestos containing material	<p>The Proponent can implement (in combination where possible, or individually) any of three feasible options with respect to the fate/disposal of the disconnected AC pipeline:</p> <ul style="list-style-type: none"> <li>• The Proponent can construct the necessary waste disposal cells at the WB Municipal Council's hazardous waste disposal site, according to the specifications of the WB Municipal Council, pay the required waste levy and subsequently dispose of the AC pipe segments at the aforementioned disposal site. The WB Municipal Council will then take responsibility for the waste.</li> <li>• The Proponent can design and construct their own dedicated disposal site for asbestos containing materials (in this case AC pipe segments) within the boundaries of one of their nearby properties, dispose of the pipe segments and continuously monitor the waste in accordance with accepted international standards. The Proponent will be responsible for the asbestos containing waste in</li> </ul>	Proponent	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<p>this instance. This option will require a separate application for an ECC.</p> <ul style="list-style-type: none"> <li>The existing AC pipeline can be buried below, on top of and/or adjacent to the proposed pipeline after being disconnected.</li> </ul>		
Permit requirements	Obtain necessary permit(s) for intended construction activity.	<p>Written permission should be obtained from the Minister of the Ministry of Environment and Tourism to carry out the proposed construction activity within the Dorob National Park.</p> <p>In the event that building material (sand and stone) is sourced from nearby quarries it is required that the necessary approval (i.e. ECC) should be obtained by the appointed Contractor.</p>	Proponent	
Protection/visibility of the pipeline	The location of the pipeline should be safeguarded from future development.	The Proponent should agree in writing with the both affected land owners (i.e. Walvis Bay Municipal Council and Ministry of Environment and Tourism) to register a servitude for the proposed pipeline. The location of the aforementioned section of the proposed pipeline should then be surveyed by a registered land surveyor and a survey diagram lodged in the correct manner with the Directorate of Survey and Mapping and the Directorate of Deeds Registration.	Proponent	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Pipeline route planning	Ensure final pipeline route minimises as far as possible impacts on existing services infrastructure.	Any conflicts between the proposed pipeline route and other services infrastructure (existing or planned) should be identified and the relevant institutions (Roads Authority, and any others applicable) consulted to resolve such conflicts.  The installation of the pipeline through the culvert must conform to the attached Roads Authority typical drawing No N3058 (see Appendix D).	Proponent	
	Ensure pipeline route minimises habitat destruction and disturbance.	The pipeline route should avoid the rocky outcrop located approximately 450 m south-west from the Rooikop Terminal Reservoir.	Proponent	
Contractor Requirements	Ensure that all tenderers are aware of the provisions of this EMP.  Ensure that the Contractor is aware of his/her responsibility.	The EMP should be included in all tender documents in order for tenderers to make provision for implementation of the EMP.  Provide the contractor with the EMP.	Proponent	
Environmental Site Manager	Ensure that activities on site are compliant with the requirements of the EMP.	Appoint an independent Environmental Site Manager to oversee environmental aspects of the development.	Proponent	
Communication and Stakeholder Consultation	To ensure that all stakeholders are adequately informed throughout construction and that there is effective	The ECO shall be the liaison person between the Contractor, community, Proponent and the Proponent's consultants.	ECO Contractor	



(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
	communication and feedback to all stakeholders.	<p>The Contractor shall inform the Walvis Bay Municipal Council two weeks before construction commences within their jurisdiction, of the project programme and they should be regularly updated of the programme. Similarly, affected non-state institutions (Roads Authority, Airports Company among others) should be notified two weeks before construction commences of the project programme and they should be regularly updated of the programme</p> <p>All communication should be kept on file at the Site Office.</p>		
Poverty alleviation and gender equality	<p>Ensure maximum level of poverty alleviation and to promote gender equality in economic opportunities.</p> <p>Optimise local service and contractor procurement</p>	<p>During drafting of tender documents include provisions designed to maximise use of local labour, especially unskilled labour. Specific recruitment procedures need to be discussed with the affected regional and local authorities.</p> <p>The Proponent needs to consider how to structure the various components of the project so as to optimise benefits to local contractors and SMEs</p>	Proponent	
Visual and Aesthetics	Ensure that the visual aspects of construction are taken into consideration to lessen impacts on neighbouring activities.	<p>Screen construction areas with shade cloth or other suitable material from adjacent properties.</p> <p>Areas to be cleared should be kept to a minimum and this should be specified in the construction contract</p>	Contractor ESM Proponent	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Waste Management	Ensure the effective and efficient separation, storage and removal of waste from the site.	Develop a Waste Management Plan for the construction phase which will detail: <ul style="list-style-type: none"> <li>• Schedules for collection</li> <li>• Responsible parties for collection</li> <li>• Details regarding waste separation (hazardous vs. general)</li> <li>• Provision of facilities for the separation and storage of waste</li> <li>• Details regarding the disposal of the waste (hazardous and general)</li> <li>• Assigns responsibilities for these activities</li> </ul>	Engineer Proponent	
Water supply	Ensure affected potable water end-users are well informed and prepared for water supply interruption at the end of the construction phase.	All affected individuals and institutions should be provided with a minimum of one week's notice of exact date and time of the water interruption associated with the disconnecting of the existing pipeline and connection of the proposed pipeline as well as the expected duration. The Proponent should ensure that the interruption to water supply is less than 24 hours.	Proponent	
<b>SITE ESTABLISHMENT</b>				

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Construction activities	Ensure that there is no unnecessary disturbance to areas on the site and that construction activities take environmental considerations into account.	A layout plan for construction activities needs to be developed and approved by the Environmental Site Manager.	Engineer Contractor ESM	
Contractor's Camp	Ensure that the contractor's camp does not pollute the environment and is not located on a sensitive site.	Staff facilities, ablutions, chemical toilets, potable water must be provided for the staff.	Contractor	
Contractor's Camp	Ensure that camp does not infringe on adjacent property owners.	Locate the camp away from immediately adjacent property owners.	Contractor	
Training	Improve the awareness of all construction personnel with regard to environmental matters.	Develop and implement a training programme to address environmental issues and responsibilities.	ESM Contractor	
<b>CONSTRUCTION</b>				
Permit requirements	Obtain necessary permit(s) for intended construction activity.	In the event that building material (sand and stone) is sourced from nearby quarries it is required that the necessary approval (i.e. ECC) should be obtained by the appointed Contractor.	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Protection of existing pipeline	Ensure existing pipeline is not damaged during construction of the new pipeline.	Heavy construction vehicles should avoid crossing or operating near the existing pipeline.	Contractor	
Impact on road infrastructure	Safe and continuous provision of road access to existing road users during construction phase.	<p>Road detours should be provided where road access (along existing/established formal or informal roads) is limited/reduced due to construction activity.</p> <p>the following Roads Authority provisions should be adhered to and taken note of during construction:</p> <ul style="list-style-type: none"> <li>• The pipeline must be properly anchored against the side of the culvert.</li> <li>• The pipeline must be placed in such a way that the flow of water does not cause damage to the pipeline or the blocking of the culvert with debris.</li> <li>• After passing through the culvert, the pipeline must on either side of the culvert immediately be taken underground with at least 600 millimetres ground cover. The pipeline must cross the road reserve at an angle of 90 degrees with the road centre line.</li> <li>• Please note that before beginning with any excavations inside the road reserve it must first be determined whether any other services such as telecommunication cables or water pipes are present.</li> </ul>	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<ul style="list-style-type: none"> <li>• All necessary precautions must be taken to ensure the safety and comfort of the travelling public during the construction process.</li> <li>• Suitable warning signs, as necessary and complying with the Road Traffic and Transport Act and its regulations, must remain erected for as long as the works are in progress.</li> <li>• The local Area Manager of the Roads Authority must be informed at least two days in advance of the commencement and completion dates of the works in order to allow for the necessary inspections to be carried out.</li> <li>• It is of paramount importance that all aspects of the works be carried out in close cooperation with the office of the Regional / District Engineer and in accordance with his/her instructions.</li> <li>• The position of the pipeline must be clearly indicated by means of metal markers to be erected in the road reserve to prevent any accidental damage to the pipeline during road works within the road reserve. The markers must be erected not less than 28 metres from the centre line of the road and must protrude at least half a metre above the ground surface. The word "PIPELINE" must appear on the markers and the letter height must be at least 75 mm.</li> </ul>		

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<ul style="list-style-type: none"> <li>• The road reserve must, at the completion of the works, be left in a clean and tidy state and all rubble and excess construction material must be gathered and carted away from the site.</li> <li>• The pipeline is installed within the road reserve at the sole risk of the owner thereof and at no risk to the Roads Authority or its employees.</li> <li>• Should the Roads Authority require at any time that the pipeline be repositioned or removed for whatever reason, it shall forthwith be repositioned or removed by the owner thereof in accordance with the instructions given by the Roads Authority, failing which the Roads Authority may arrange for such repositioning or removal at the cost of the owner thereof and at no risk to the Authority.</li> <li>• Any damage caused, during the installation of the pipeline, to any infrastructure of the Roads Authority shall be repaired or replaced by the owner of the pipeline as determined by the Roads Authority at no cost to the Authority.</li> <li>• Any damage caused by the Proponent and/or his/her agents to the property of any third party shall be a matter between the Proponent and that third party.</li> <li>• The Roads Authority will not accept responsibility for any damage, injury or loss of life that may occur as a result of negligence, inadequate warning signs</li> </ul>		

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		or the inadequacy of any other precautionary measures needing to be taken while the works are in progress.		
Protection/ visibility of the pipeline	The location of the pipeline should be clearly visible from the surface to safeguard it from future development.	The alignment of the proposed pipeline should be clearly marked for its entire length	Contractor	
Health, Safety and Security	To aim for zero incidents and accidents on the construction site.  To ensure that emergency response procedures are in place.	Adhere to regulations pertaining to Health and Safety of the Labour Act.  Enforce relevant Health and Safety Regulations for these specific activities.  Provide an HIV/AIDS awareness programme to all staff.  All staff is equipped and knows how to use personal protective equipment (PPE).  Signage of use of PPE at appropriate locations.	Contractor  ESM	
Archaeological Evidence	Ensure the protection of archaeological sites.	Should any new archaeological site be discovered, these need to be clearly demarcated and reported to the National Heritage Council. Construction must be stopped and a professional archaeologist consulted should any archaeological remains be uncovered (see Appendix E).	Contractor  ESM	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Borrow Pits	Ensure that the soil resources are not over exploited.	No borrow pit may be excavated from any sensitive or open space areas.	Contractor & Environmental Site Manager	
Blasting	Ensure blasting does not pose a danger to workers or staff, or neighbouring activities.	Authorisation to undertake blasting activities must be obtained from the relevant authority.	Contractor	
		All conditions relating to blasting and the Occupational Health & Safety Act must be complied to.	Contractor	
Cleaning of equipment	Ensure that spillages are minimised and that where these occur, that they are appropriately managed.	Proper cleaning trays should be used for the cleaning of cement mixing and handling equipment.	Contractor	
Communication	Ensure that interested and affected parties are provided with a medium through which to lay complaints with regard to activities on site.	A complaints register should be kept in the site office. The Environmental Forum needs to be informed of all complaints and corrective action must be taken where required.	Contractor	
Contaminated Soil	Ensure that soils that are contaminated do not pollute the environment.	All soils that have been contaminated by fuel spills, paints spills, etc. must be appropriately removed from the site.	Contractor	
Contractor's camp	Ensure that the contractor's camp is secure.	All materials and equipment that can be moved must be stored overnight in the contractor's camp.	Contractor	



(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Dust	Ensure dust does not cause nuisance to neighbouring activities.	Wet all exposed sand areas such as roadways, stockpiles and working areas that give rise to dust. This must ensure adequate dust suppression and scheduled re-sprays should be administered	Contractor	
Environmental Site Manager	Ensure that there is compliance with the EMP on site.	An Environmental Site Manager may inspect the site at any time during the construction phase.	Environmental Site Manager	
Effect of the EMP	Ensure that the EMP is enforced on all contractors.	Each contractor and subcontractor must be notified on the content of this EMP.	Engineer & Environmental Site Manager	
Effect of the EMP	Ensure that the EMP is enforced on all contractors	All contractors and subcontractors must be bound by the content and requirements in this EMP.	Engineer & Environmental Site Manager	
Ground Water	Prevent the contamination of groundwater resources.	Vehicles must be equipped with drip trays to prevent spillages of oils and fuels.	Contractor	
Installation of Services	Ensure that all points for water provision are regularly inspected for erosion impacts.	Implement adequate mitigating measures to curtail any erosion impacts.	Contractor	
Installation of Services	Ensure that water used to wash machinery and any other "grey" water does not pollute the site.	Provide a wash bay with a impermeable floor to contain such water.	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Litter	Ensure that the site remains clean and clear of litter.	All litter must be collected into rubbish bins located on the site. These bins must be regularly (i.e. weekly) collected and transported to a registered waste disposal facility.	Contractor	
Noise	Ensure that nuisance noise from construction activities does not disrupt the surrounding landowners.	Limit construction time to the following hours: 07:00 to 18:00 during week; 08:00 to 15:00 on Saturdays, and no noisy activities on Sundays.	Contractor	
Noise	Ensure that nuisance noise does not disrupt the surrounding land owners.	Jack hammering, if required, must take place between the hours of 08:00 and 17:00 during the week only.	Contractor	
Noise	Ensure that nuisance noise from construction vehicles does not disrupt the surrounding landowners.	No heavy vehicles may be permitted to move on site on Sundays. Speed limit at the construction site 30 km/hour	Contractor	
Road Works and Traffic	Ensure that soil does not erode from culverts or similar structures.	All culverts or similar structures must be stabilised with gabions and/or indigenous grasses.	Contractor	
Road Works and Traffic	Ensure that local residents are not inconvenienced by the movement of construction vehicles off-site.	Ensure least possible disruption to traffic and potential safety hazards during construction. Contactor's plan to achieve this need to be discussed at the project initiation meeting.	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<p>The movement of heavy vehicles from the site must occur outside of peak traffic hours (after 08h30 and before 16h30).</p> <p>Contractor needs to liaise with Traffic Authorities</p>		
Road Works and Traffic	Ensure that local residents are not inconvenienced by the movement of construction vehicles off-site.	Spillages on the roads should be avoided. When these occur, they should be cleaned immediately.	Contractor	
Road Works and Traffic	Ensure that local residents are not inconvenienced by the movement of construction vehicles off-site.	Proper traffic and safety warning signs and notices should be placed on the C14 Road and construction site during the construction and should be to the satisfaction of the Engineer and Roads Authority	Contractor Engineer ESM	
Safety & Security	Ensure the safety and security of staff and the public.	All local authority by-laws must be adhered to.	Contractor	
Safety & Security	Ensure the safety and security of staff and the public.	All contractors should take cognisance of and abide by the Labour Act's Regulations relating to the health and safety of employees at work.	Contractor	
Safety & Security	Ensure the safety and security of staff and the public.	Trenches to a depth greater than 1.5 m must be supported or appropriate warning must be provided.	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Safety & Security	Ensure the safety and security of staff and the public.	Provided fencing needs to be checked and maintained.	Contractor	
Safety & Security	Ensure the safety and security of staff and the public.	The movement of construction workers through the neighbouring area should be restricted wherever possible.	Contractor	
Soil	Ensure that storm water cannot erode the top soil stockpile.	Construct and maintain a berm around top soil stockpiles.	Contractor	
Storage Facilities	Ensure that hazardous materials are stored according to legislative requirements.	Specifically designed storage facilities need to be provided and used for hazardous materials.	Contractor	
Storage Facilities	Ensure that fuel stored on site does not pose a pollution and fire hazard.	Fuels stored on site shall be banded to 110% of the capacity of the largest container.	Contractor	
Storage Facilities	Ensure that fuel stored on site does not pose a pollution hazard.	The fuel storage area must not be located less than 100m from any water resource.	Contractor	
Storm Water Run-off	Ensure that run-off does not contribute to erosion & siltation.	Construct and maintain berms on the site to contain storm water run-off or establish riffle beds or retention ponds, as appropriate.	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
Vehicle repairs	Ensure that spillages are minimised and that where these occur, that they are appropriately managed.	Minor vehicle repairs on an appropriate work surface may only take place within the provided area in the contractors camp	Contractor	
Waste	Ensure the adequate removal of solid waste.	All wastes (hazardous or general) must be collected and disposed of at an appropriate registered facility.	Contractor	
Waste	Ensure the adequate management of waste	<p>Refuse shall be disposed of into scavenger- (baboons, dogs, rodents, etc.) and weather-proof bins. The Contractor shall then remove the refuse collected from the working areas, from Site at least once a week or depending on necessity.</p> <p>Refuse must be disposed of at an authorised landfill acceptable to the DEA.</p>	Contractor	
Waste	Ensure the adequate management of waste.	No waste should be burnt on site.	Contractor	
Health and Safety	Minimise risks associated with exposure to airborne asbestos materials and the associated respiratory health impacts.	When removing/handling AC pipes, it is important to handle the pipes in a manner that will minimise the risk of making it friable (i.e. crumbly) or releasing asbestos dust into the environment. Start by exposing the AC pipe with minimal disturbance. Excavate no closer than 15 cm of the pipe. Carefully uncover the remainder of the soil surrounding the pipe by hand or with a shovel.	Proponent Engineer	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<p>An assessment should then be made to determine if the pipe is damaged, cracked or broken.</p> <p>Pipe segments which are not damaged (i.e. intact and not deteriorated) should be handled in the following manner:</p> <ol style="list-style-type: none"> <li>1. Place durable plastic sheeting (plastic that will not rip under abrasive conditions) under the AC pipe to prevent soil contamination.</li> <li>2. Adequately wet the AC pipe with water (use of surfactant or liquid soap is encouraged) before and during removal to avoid creating airborne dust.</li> <li>3. Separate the AC pipe at the nearest coupling (pipe joint fitting).</li> <li>4. Slide the pipe apart at the joints (no saw cutting) or use other methods that do not cause the pipe to break, become friable or otherwise create the potential to release asbestos fibres.</li> <li>5. It is recommended as best practice (i.e. not required) that the wet AC pipe should be wrapped in two layers of durable plastic sheeting (plastic that will not rip under abrasive conditions) and sealed with durable adhesive tape. This can be done in the trench or adjacent to the trench.</li> <li>6. If the trench is filled with water, the placement of polyethylene sheeting is not required.</li> <li>7. Transport/move AC pipe to desired end point.</li> </ol>		

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<p>Pipe segments which are damaged (i.e. deteriorated or not intact) or when cutting or mechanical breakage (e.g., with saws, or blade cutting) is necessary should be handled in the following manner:</p> <ol style="list-style-type: none"> <li>1. Place durable plastic sheeting (plastic that will not rip under abrasive conditions) under the AC pipe to prevent soil contamination.</li> <li>2. Adequately wet AC pipe with water where cutting or breaking will occur.</li> <li>3. Saw cutting of AC pipe shall only be conducted with dustless concrete cutting equipment or wet cutting equipment.</li> <li>4. It is recommended as best practice (i.e. not required) that the wet AC pipe should be wrapped in two layers of durable plastic sheeting (plastic that will not rip under abrasive conditions) and sealed. This can be done in the trench or adjacent to the trench.</li> </ol> <p>Transport/move AC pipe to desired end point.</p>		
<b>POST CONSTRUCTION</b>				
Soil	Promote the rehabilitation of the site back to its original condition as far as possible.	Implement Rehabilitation Management Plan (see Appendix B)	Contractor	

(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
<b>MONITORING</b>				
Audit Reports	Ensure adequate reporting of progress with the development	Regular reports, monthly and construction end are proposed, and should be forwarded to the DEA.	ESM	
Monitoring	Ensure compliance with the requirements of the EMP.	Undertake monitoring activities on a monthly basis.	ESM	
Monitoring	Ensure successful rehabilitation	During rehabilitation monitoring is crucial and site should be visited at least twice a week.  Check for any signs of erosion and rectify.	ESM Contractor	
<b>OPERATION AND MANAGEMENT</b>				
Maintenance and emergency repairs	Ensure minimal negative conflict during routine maintenance activities as well as emergency repair procedures.	<p>A Routine Maintenance and Emergency Repair Management Plan should be drafted which guides and protects both parties (i.e. the Proponent and affected land owners) during either a routine maintenance and/or emergency repairs to the underground pipelines.</p> <ul style="list-style-type: none"> <li>This plan should clearly stipulate the actions and pre-requisites in the instances of conducting route maintenance and the time of year when this should be done.</li> </ul>	Proponent Engineer	



(I) Issue	(II) Objective	(III) Mitigation Measure	(IV) Responsibility	(V) Compliance Notes
		<ul style="list-style-type: none"> <li>Access to 'private' land and consent from the owner/s should clearly be stipulated, especially for emergency repair scenarios.</li> </ul>		
Management	Ensure minimal interruptions to water supply.	An Operational Monitoring Plan would be important in ensuring that any defects or vandalism is detected as quick as possible to enable repairs or proactive measures to avoid unexpected interruptions to water supply along the proposed pipeline and the affected end-users.	Proponent Engineer	

**APPENDIX A ENVIRONMENTAL METHOD STATEMENT**

# METHOD STATEMENT

CONTRACT: .....

DATE: .....

**WHAT WORK IS TO BE UNDERTAKEN?** (give a brief description of the works)

**WHERE ARE THE WORKS TO BE UNDERTAKEN?** (where possible, provide an annotated plan and a full description of the extent of works)

**START AND END DATE OF WORKS FOR WHICH THE METHOD STATEMENT IS REQUIRED**

Start Date:

End Date:

**HOW ARE THE WORKS TO BE UNDERTAKEN?** (provide as much detail as possible, including annotated sketches and plans where possible) \*Note: please attach extra pages if more space is required

**APPENDIX C PRO-FORMA: ENVIRONMENTAL MONITORING REPORT**

# ESM ENVIRONMENTAL MONITORING REPORT

Report No:.....

Date:.....

Method Statements	Contractor:	Date received:

Environmental Education	Contractor:	Date undertaken:

Issue	Observation	Remedial action	Compliance
<b>1 Construction</b>			
1.1 All plant, personnel, etc. restricted to works area?			
1.2 Contractor's Camp located in area of low environmental sensitivity as indicated by the Engineer?			
1.3 Where needed, sensitive areas adequately fenced off?			
1.4 Fencing well maintained?			
1.5 No unauthorised entry, stockpiling, etc. outside work areas?			

Issue	Observation	Remedial action	Compliance
1.6 All vehicles and plant remain on designated routes?			
1.7 Information posters put up and maintained where needed?			
1.8 No smoking in hazardous areas?			
1.9 Basic fire fighting equipment available on Site?			
1.10 No burning of wastes as a means of disposal?			
1.11 Staff aware of procedures in the event of spills/leaks?			

<b>Issue</b>	<b>Observation</b>	<b>Remedial action</b>	<b>Compliance</b>
1.12 Materials for dealing with spills/leaks available?			
1.13 Emergency contact numbers displayed at Contractor's office?			
1.14 Complaints Register up to date?			
1.15 Archaeological material found on Site mitigated?			
1.16 No animals trapped or harmed?			
1.17 No flora removed or damaged outside work areas?			



Issue	Observation	Remedial action	Compliance
1.18 Adequate drainage and retaining works in place to control erosion/siltation?			
1.19 Restricted traffic over stabilised areas?			
1.20 No concrete mixing on bare ground?			
1.21 Concrete batching restricted to area of low environmental sensitivity?			
1.22 All wastewater from concrete mixing area disposed of via wastewater management system?			
1.23 Concrete mixing area kept neat and clean?			

Issue	Observation	Remedial action	Compliance
1.24 Suitable screening and containment of cement silos?			
1.25 All visible remains of excess concrete removed on completion of concrete work?			
1.26 No pollution from drilling operations?			
1.27 Location and rescue of plants undertaken by suitably qualified contractor?			
1.28 Rescued plants moved to nursery if direct transplantation not possible?			
1.29 After vegetation clearance, all unstable areas are properly stabilised?			

Issue	Observation	Remedial action	Compliance
1.30 Cleared vegetation properly disposed of?			
1.31 All wastes removed from cleared area and disposed of?			
1.32 Mulched vegetation stored in bags?			
1.33 Fertilisers containing phosphates not used?			
1.34 No planting undertaken where construction works have not yet been finished?			
1.35 No unauthorised traffic on revegetated areas?			

## 2 Materials

Issue	Observation	Remedial action	Compliance
2.1 Construction materials adequately secured to ensure safe deliveries?			
2.2 All materials being stored inside Contractor's Camp?			
2.3 All imported materials free of weeds, litter, etc.?			
2.4 Stockpile areas approved?			
2.5 Topsoil stripped and stockpiled at a suitable site prior to earthworks?			
2.6 No spoil stockpiled outside agreed areas?			

Issue	Observation	Remedial action	Compliance
2.7 Spoil stockpiles correctly shaped and protected?			
2.8 All plants used for landscaping/rehabilitation listed in the approved plant list?			
2.9 Plants adequately protected during transit and at storage facilities?			
2.10 Plants healthy and free from diseases and pests?			
<b>3. Plant</b>			
3.1 Fuel/oil storage facilities adequately secured and protected against leakage?			

Issue	Observation	Remedial action	Compliance
3.2 Safety signage provided			
3.3 All electrical/petrol pumps suitably equipped and placed not cause any danger of ignition?			
3.4 Fuel storage areas comply with fire safety regulations?			
3.5 Necessary authorisations obtained for temporary above ground fuel tanks?			
3.6 Capacity of a fuel tank does not exceed 9000 l?			
3.7 Fuel tanks erected at least 3.5 m away from buildings, boundaries or other flammable materials?			

Issue	Observation	Remedial action	Compliance
3.8 Adequate toilet facilities provided for staff (min. 1 toilet per 30 workers)?			
3.9 Toilets adequately maintained?			
3.10 All workers use toilets?			
3.11 Scavenger-proof bins with lids provided at eating areas?			
3.12 Waste temporarily stored inside Contractor's Camp in weather- and scavenger-proof bins?			
3.13 No burying or dumping of wastes on site?			

Issue	Observation	Remedial action	Compliance
3.14 Waste management system in place?			
3.15 Refuse disposed of at licensed landfill?			
3.16 Adequate waste-water management system in place?			
3.17 Approval for discharge of contaminated water into municipal sewer system?			
3.18 Runoff from workshops, fuel depots, etc. directed into conservancy tanks for disposal at approved site?			
3.19 Wash areas placed and built in such a way that does not cause any pollution?			



Issue	Observation	Remedial action	Compliance
3.20 All maintenance of plant and equipment takes place in workshop?			
3.21 All plant is well maintained (no leaking)?			
3.22 Workshop has a bunded, impermeable floor sloping towards oil trap?			
3.23 Contractor's Camp tidy?			
3.24 All plant and machinery have drip trays, which are checked and emptied daily?			
3.25 All repairs on machinery using fuels or lubricants done over a drip tray?			

Issue	Observation	Remedial action	Compliance
3.26 Static plant located within a bunded area?			
3.27 Measures in place to minimise dust generation?			
3.28 No handling/transport of erodible materials under high wind conditions?			

EMP Transgressions	Contractor:	Date:	Fine issued:



--	--	--

Other issues	