


APP: 240603003919

Environmental Management Plan (EMP) for The Proposed Drilling of Boreholes for Water Supply at Ozohere Village in Ohungu Conservancy, Erongo Region

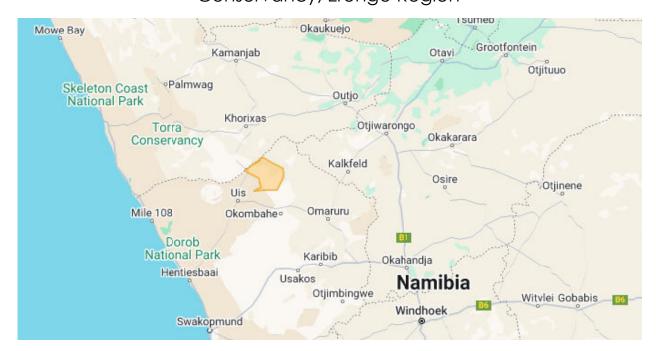

CONSULTANT:

Mr. Ipeinge Mundjulu (BSC, MSc)

Red-Dune Consulting CC

P O Box 27623 Windhoek

Cell: +264 81 147 7889

PROPONENT

Ohungu Conservancy

P O Box 548

Omaruru









DOCUMENT INFORMATION			
DOCUMENT STATUS	Final		
APPLICATION NO.	APP: 240603003919		
PROJECT TITLE	Environmental Management Plan for The		
	Proposed Drilling of Boreholes for Water		
	Supply at Ozohere Settlement in Ohungu		
	Conservancy, Erongo Region		
CLIENT	Ohungu Conservancy		
LOCATION	Ohungu Conservancy, Erongo Region		
	Ozohere Village		
AUTHOR	Mr. Ipeinge Mundjulu		
DATE	17 September 2024		

Copyright notice

This report and its content is copyright of Red-Dune Consulting CC. Any redistribution or reproduction of part or all of the content in an any form other than the intend purpose is prohibited.

Table of Contents

A	CRONYI	MS	i
1	The	Environmental Management Plan	1
	1.1	Purpose of the EMP	1
	1.2	Compliance to the EMP	1
	1.3	Roles and Responsibility	1
	1.3.1	Proponent	1
	1.3.2	Site Manager	2
	1.3.3	Employees	2
	1.3.4	Environmental Compliance Officer	2
	1.3.5	Ministry of Agriculture Water and Land Reform	2
	1.4	Disciplinary Action	2
2	The	EMP table	3
	2.1	Part I: Construction Phase	3
	2.1.1	Socio-Economic Consideration	3
	2.1.2	Health and Safety of employees	4
	2.1.3	Safety of borehole / water infrastructures	8
	2.1.4	Bio-Physical Consideration	8
	2.1.5	Heritage Resources	13
	2.1	Part B: Operational Phase	15
	2.1.1	Part III: Aquifer Conservation	15
	2.1.2	Part V. Ground Water Monitoring Plan	18
3	Dece	ommissioning and Rehabilitation Plan	19
4	Con	clusion and Recommendations	20
	4.1	Conclusions	20
	12	Pocommandations	20

ACRONYMS

CCFN Community Conservation Fund Namibia

DEA Department of Environmental Affairs

EA Environmental Assessment

EAP Environmental Assessment Practitioner

ECC Environmental Clearance Certificate

EIA Environmental Impact Assessment

EMA Environmental Management Act (No. 7 of 2007)

EMP Environmental Management Plan

EMP Environmental Management Plan

GRM Grievance Redress Mechanism

HWC Human Wildlife Conflict

IWRMP Integrated Water Resource Management

KfW Kreditanstalt für Wiederaufbau

m³ Cubic meter

MAWLR Ministry of Agriculture Water and Land Reform

MEFT Ministry of Environment Forestry and Tourism

PPE Personal Protective Equipment

RDC Red-Dune Consulting CC

SM Site Manager

WC Wildlife Crime

1 THE ENVIRONMENTAL MANAGEMENT PLAN

1.1 Purpose of the EMP

This EMP is an output of the scoping study that was conducted for the project, consequently, the impact assessment are detailed in the scoping report. This EMP is a risk strategy that contains logical framework, monitoring programme, mitigation measures, and management control strategies to minimize environmental impacts. It further stipulates the roles and responsibility of persons involved in the project. These strategies are developed to reduce the levels of impacts for the projects. Lastly, the EMP further aims to develop mitigation measure of social and environmental risk that the project may cause as identified int eh Environmental Social Management Framework (ESMF) of the project.

1.2 Compliance to the EMP

This EMP is a legally binding document under the provisions of the Environmental Management Act, 2007 (Act No. 7 of 2007) (EMA). The Conservancy with support with from CCFN and contractors should adhere to the framework of this document.

1.3 Roles and Responsibility

1.3.1 Proponent

The proponent, Ohungu Conservancy with support with from CCFN shall take overall responsibility for implementation of the EMP. It remains the responsibility of the proponent to appoint key personnel such as Site Manager and ensure that all employees and contractors are conversant with the EMP.

1.3.2 Site Manager

The Site Manager (SM) represents the proponent on site. He/she shall be responsible for daily activities in ensuring environmental protection. All communication with regard to the implementation of EMP must be channelled through the SM.

1.3.3 Employees

It shall be responsibility of employees to always adhere to the provision of EMP when on site

1.3.4 Environmental Compliance Officer

Compliance to EMP is enforced by the designated government officials.

1.3.5 Ministry of Agriculture Water and Land Reform

This ministry as mandated through the Water Resources Management Act 11 of 2013 to ensure adequate management, protection, development, use and conservation of water resources; to provide for the regulation and monitoring of water services and to provide for incidental matters. MAWLR will be responsible to ensure to that the allocated abstraction by the water permit is not exceeded to ensure a health aquifer.

1.4 Disciplinary Action

This EMP is a legally binding document, non-compliance to the EMP is punishable in accordance to the provision of EMA

2 THE EMP TABLE

This Environmental Management Plan (EMP) is divided into two parts: i) Construction and ii) Operation. It addresses issues related to the socio-economic environment, bio-physical environment, pollution and waste generation, and heritage resources. This document is a living resource, subject to amendments as needed to ensure effective environmental protection. Consequently, aspects that may not have been covered during its initial development can be incorporated in the future.

2.1 Part I: Construction Phase

2.1.1 Socio-Economic Consideration

Environmental /	Objectives	Proposed Mitigation Measures Monitoring Indicator	Party
Social Impact			Responsible
Awareness of	To ensure that	1. All employees must go through an • Induction Minutes and	Contractor
the EMP	employees	induction course for the provision of the Attendance Register,	
	/contractors are	EMP. Physical verification of	
	familiar with the	2. Ensure that a copy of the EMP is kept on the EMP on site.	
	requirements of the	site	
	EMP		

Environmental /	al / Objectives Proposed Mitigation Measures		Monitoring Indicator	Party
Social Impact				Responsible
Employment	To ensure that	1. Ensure that all general work is reserved for	Employee register	Contractor
Socio-	general work	local people	Wages for employee	
Economic	created during the	2. Fair compensation and labour practise as	• Complains about	
advancement	project is reserved	per Namibian Labour Laws must be	payment	
for local	for local people	followed		
Skill and	To build local	1. Identify and train competent people	Training report	Contractor
Knowledge	capacity	(Preferable youth) to do basic		
transfer		maintenance of the borehole and its		
		supporting infrastructure		

2.1.2 Health and Safety of employees

Environmental / Objectives		Proposed Mitigation Measures	Monitoring Indicator	Party
Social Impact				Responsible
HIV and AIDS,	Prevent alcohol	Provide awareness to the employees	• Monitor presence of	Contractor
Alcohol and	and drug use at	on dangers of HIV/AIDS, alcohol and	alcohol at construction	
Drug abuse	workplace.	drug abuse	site	
	Provide	2. Provide Condoms to employees.	• Awareness meeting	
	awareness of		attendance registers	

Environmental /	Objectives	Proposed Mitigation Measures	Monitoring Indicator	Party
Social Impact				Responsible
	dangers on	3. Ban the employees against the use of	Breathalyser report	
	HIV/AIDS	alcohol during working hours.	Disciplinary reports	
		4. Provide awareness on the dangers and	• Physical assessment	
		health impacts of alcohol and drug use.	and logs of condom	
		5. All employees must be screen with the	procurement	
		breathalyser to avoid intoxicated		
		personnel on site.		
		6. Adopt a disciplinary system to discipline		
		staff for non-compliance.		
Health	To ensure	1. Abide to the Occupational Health and	Complaints of health	Contractor
	employees and	Safety and Labour Act of Namibia and	issues by employees	
	community	other statutory requirements such as	First aid kit available	
	health	International Labour Practise		
		Organization (ILO).		
		2. Ensure adequate first aid kit equipped		
		with anti-venoms.		
		3. Supply clean drinking water to the site.		
		4. Adhere to the Labour act, non-toxic		
		human dust exposure levels may not		

Environmental /	Objectives	Proposed Mitigation Measures	Monitoring Indicator	Party
Social Impact				Responsible
		exceed 5mg/m3 for respiratory dust		
		and 15mg/m3 for total dust.		
		5. Supervisors must undergo an		
		occupational health and first aid		
		course,		
		6. 18. Provide gender segregated		
		ablution facilities		
Safety	To ensure	1. Develop a safety plan.	Safety plan / pamphlets	Contractor
	employees and	2. Ensure that every employee goes	• Training minutes and	
	community safety	through an induction course about	attendance register	
		safety.	• Physical verification of	
		3. Provide appropriate Personal Protective	PP	
		Equipment (PPE) which includes		
		helmets, overalls, safety shoes, safety		
		glasses, gloves, etc.		
		4. All drivers must be in possession of		
		appropriated driver's licenses		
		5. All heavy vehicles must have a rotating		
		flushing light installed for visibility.		

Environmental /	Objectives	Proposed Mitigation Measures	Monitoring Indicator	Party
Social Impact				Responsible
		 6. Ensure that all vehicle are well serviced and roadworthy. 7. Adequate safety signs must be put at designated places. 8. Tipper trucks carrying concrete stones and sand for construction must be covered to avoid flying stock and dust. 9. Train employee elephant behaviour and predators 		
Noise Pollution	To prevent noise nuisance	 Maintain low speed All vehicles must be well serviced to prevent excessive noise Do not hoot unnecessary Do not rev the vehicle engines Do not play loud music / radio 	 Noise complaints / reports by tourist / community Vehicle service books 	Contractor

2.1.3 Safety of borehole / water infrastructures

Environmental /	Objectives	Proposed Mitigation Measures	Monitoring Indicator	Party
Social Impact				Responsible
Destruction of	To prevent destruction of	1. Construct an elephant proof fence	• Physical	Contractor
water	boreholes and	around the borehole and its	verification of	
infrastructure by	associated infrastructure	supporting infrastructures	elephant proof	
elephant	by elephants.		fence	

2.1.4 Bio-Physical Consideration

Environmental /	Objective	Proposed Mitigation Measure	Monitoring Indicator	Responsibili
Social Impact				ty
Biodiversity	To protect plant and	1. Do not cut down trees	Physical verification	Contractor
	animals (The proposed	unnecessary.	Report of poaching	
	drilling sites are free of	2. Do not kill animals.		
	vegetation and animals	3. Poaching strictly forbidden.		
	(unless crawling animals)	4. Do not destroy nests if found on		
		site.		
		1.		

Environmental /	Objective	Proposed Mitigation Measure	Monitoring Indicator	Responsibili
Social Impact				ty
Land degradation	To prevent soil	Movement of vehicles / trucks	Physical observation	Contractor
Uncontrolled	disturbance / erosion	must be well coordinated to	of tracks outside	
movement of drill rig		ensure minimal soil disturbance	designated areas	
at the project site				
may cause land				
degradation.				
Water pollution	To prevent surface and	1. Fuelling of heavy vehicle on site	Physical observation	Contractor
Heavy vehicle and	groundwater pollution	must be well coordinated at	of drip trays, oil marks	
machinery may		designated places.	etc	
pollute water		2. Stationary vehicles must be	• Vehicles service	
sources from		provided with drip tray to capture	report / service books	
leakages of oils,		oil, lubricants, and hydraulic fluids	• Training report on	
hydraulic fluids,		leakages.	emergency response	
lubricants, and		3. All vehicle and machinery must be	Reports of disposal of	
greases.		well service to avoid leakages.	contaminated soils	
		4. Provide and train employees on oil		
		spill emergency response.		
		5. Soils contaminated with grease,		
		oils and hydrocarbons must be		
		collected and disposed of at an		

Environmental /	Objective	Proposed Mitigation Measure	Monitoring Indicator	Responsibili
Social Impact				ty
		approved site;		
General waste	To manage solid waste To prevent littering, pollution, contamination of water and general environmental health hazards	 Maintain good housekeeping on site. Designate a storage area for building rubbles. Provide skip bins for construction waste. Provide labelled household waste drums for household solid waste. Used oil, grease and lubricants cans must be collected in appropriate drums and disposed of at an approved site Provide well labelled waste drums. No onsite burying / dumping or burning of waste material is 	 Physical verification of waste drums Report of waste disposal at approved sites 	Contractor

Environmental /	Objective	Proposed Mitigation Measure	Monitoring Indicator	Responsibili
Social Impact				ty
		permitted.		
		8. Ensure appropriate waste		
		collection and removal from		
		the site and dispose at		
		appropriate waste disposal site.		
Dust pollution	Land clearing, digging,	1. Movement of heavy vehicles must	•	
	and the movement of	strictly be restricted on site.		
	vehicles and heavy	2. Adhere to the minimum speed limit		
	machinery on project	of 30 or 40km/hour.		
	sites, along with concrete	3. Do not excavate and/or offload		
	work, transportation of	sand during heavy winds.		
	sand and concrete	4. Trucks carrying sand must be		
	stones, and cement	covered.		
	mixing, can generate	5. Sand stock piles must be covered		
	fugitive dust. Additionally,	or regularly water sprayed with		
	uncoordinated or	water.		
	reckless driving on gravel	6. On site where soil is loosened by		
	roads may reduce	vehicle movement, apply dust a		
		suppression method such as water		

Environmental /	Objective	Proposed Mitigation Measure	Monitoring Indicator	Responsibili
Social Impact				ty
	visibility for other road	spraying.		
	users	7. Cement and concrete must be		
		mixed with concrete mixers and		
		not manually in the open.		
		8. Cement bags must be stored and		
		disposed of properly and may not		
		be shaken in the open.		

2.1.5 Heritage Resources

Heritage	Objectives	Proposed Mitigation Measures	Monitoring Indicator	Responsibility
Resource				
Heritage	The proposed area does	1. Employee must be trained on the possible	• Training records	Contractor
and	not have known Heritage	find of heritage and archaeological	and attendance	
Archaeology	site or archaeological	material in the area.	registers	
	material. Regardless and	2. Implement a chance find and steps to be		
	as standard practise, a	taken for heritage and archaeological		
	chance find is	material finding (Heritage (rock painting		
	developed.	and drawings), human remains or		
	to ensure protection of	artefacts) are unearthed by;		
	artefacts, heritage and	i. Stopping the activity immediately		
	archaeological materials.	ii. Informing the operational manager		
		or supervisor		
		iii. Cordoned of the area with a		
		danger tape and manager to take		
		appropriated pictures.		
		3. Manager/supervisor must report the finding		
		to the following competent authorities,		
		National Heritage Council of Namibia (061		
		244 375) National Museum (+264 61 276800)		

Heritage	Objectives	Proposed Mitigation Measures	Monitoring Indicator	Responsibility
Resource				
		or the National Forensic Laboratory (+264		
		61 240461).		

2.1 Part B: Operational Phase

2.1.1 Part III: Aquifer Conservation

Aquifer conservation refers to the sustainable management and protection of underground water resources to ensure their long-term viability. This aspect is critical part of this EMP owing to the low yield fractured aquifers and known overabstraction which led to degraded water quality especially increase in salinity in the area. Therefore, this EMP put strong emphasis on monitoring to ensure the aquifer healthy.

Environmental /	Objective	Action Required	Monitoring Indicator	Party
Social Aspect				responsible
Water	To conserve	1.Do not abstract more than what is	Abstraction reports	Proponent
abstraction	the aquifer	allocated by the permit.	• Ground water	
		2. Develop and implement a ground water	monitoring plan	
		monitoring plan.	• Report of test	
		3.Install automatic measuring gauge to	pumping	
		monitor abstraction.	Physical verification	
			of vegetation	
		4. Carry out periodic pumping yield to	Water quality	
		assess aquifer sustainability.		

Environmental /	Objective	Action Required	Monitoring Indicator	Party
Social Aspect				responsible
		5. Monitor local vegetation and report their		
		unusual health status.		
		6. Undertake systematic water quality		
		assessment.		
Ecology	Rangeland	1. Monitor the vegetation health condition	Vegetation	Proponent
	Management	during abstraction and vice versa.	monitoring	
Skill and	To build local	1. Identify and train competent people	Training report	Proponent
Knowledge	capacity	(Preferable youth) to do basic		
transfer		maintenance of the borehole and its		
		supporting infrastructure.		
Risk of water	To prevent	1. Build high and thick enough that will	• Elephant incident	Proponent
infrastructure	infrastructure	prevent elephants access to the water	report	
destruction buy	destruction by	tank and solar infrastructures.		
elephant	elephant			
Conflict of water	To prevent	Raise awareness of the indented	Community	Proponent
use buy the	conflict	purpose of the borehole.	consultation and	
communities	among		awareness raising	
			report	

Environmental /	Objective	Action Required	Monitoring Indicator	Party
Social Aspect				responsible
	communities of	2. Ensure no one is made to be entitled		
	the borehole	to owning or have controlling power		
		on who should use the borehole		
Corrosion of	To ensure the	1. Use non-corrosive casing.	• Corrosion	Proponent
borehole metal	casing are not		monitoring reports	
casing	corroded that			
	could affect			
	pump yields			
	and water			
	quality			

2.1.2 Part V. Ground Water Monitoring Plan

The purpose of the groundwater monitoring plan is to ensure that appropriate procedures are in place to monitor and evaluate the response of the aquifer and the surrounding environment to the abstraction process. Additionally, the plan aims to manage the impacts of groundwater abstraction and contaminant loads, while also monitoring aquifer response and water quality. The proposed procedures will serve as an early warning system for potential over-abstraction.

2.1.2.1 Groundwater Quality

It is essential to monitor the quality of abstracted groundwater on a regular and realistic basis. This ongoing assessment will serve as an early warning system for any changes in water quality that may arise due to the abstraction process, natural factors, or pollution. Regular monitoring will help identify potential issues before they become significant problems, allowing for timely interventions.

To effectively achieve this, it is recommended to conduct intermittent water quality testing. This testing should include a comprehensive analysis of various parameters, such as chemical composition, microbial presence, and overall water quality indicators. By implementing a systematic approach to water quality testing, the project can ensure the sustainability of groundwater resources and protect both human health and the surrounding environment.

2.1.2.2 Groundwater Level Measurements

The level of groundwater in the aquifer plays a crucial role in assessing the relationship between water quantity and the rate of abstraction. This information is particularly important given the limited recharge rates due to low

rainfall in the area. To facilitate this monitoring, a provision has been included in the monitoring sheet for water meter readings provided by the Ministry of Agriculture, Water and Land Reform (MAWLR) to the borehole operator.

It is essential that baseline hydrological data on water levels is recorded to ensure consistent and time-variant data collection. This systematic approach to monitoring will not only help in managing water resources effectively but will also serve as compelling evidence of any discrepancies or errors when the MAWLR conducts periodic inspections. Establishing a robust framework for tracking groundwater levels, will result in a better understanding of the general groundwater resource in the area that will inform necessary actions to mitigate potential impacts.

3 DECOMMISSIONING AND REHABILITATION PLAN

Decommissioning is typically the reverse process of construction, involving the removal of all installed equipment and structures. In the context of groundwater supply, the aim is to maintain this resource over an indefinite timeframe. Unless there is an urgent national issue—such as significantly degraded water quality—that necessitates decommissioning, the borehole is intended to serve future generations.

As the equipment ages, it will require replacement and maintenance to ensure the continued smooth operation of the borehole. It is essential that maintenance is carried out by qualified Namibians, who possess the necessary skills and knowledge associated with borehole management.

Borehole casing are prone to corrosion, which can pose risks to the longevity and efficiency of the borehole. Therefore, it is critical to undertake periodic rehabilitation to ensure that the borehole's yield and water quality remains unaffected over time.

4 CONCLUSION AND RECOMMENDATIONS

4.1 Conclusions

The Northwest landscape, the Erongo and Kunene Regions, are some of the driest areas in Namibia. The Ozohere campsite, in particular, receives an average of less than 60mm of rainfall annually, making water a scarce resource. Surface water is only available in ephemeral rivers during periods of substantial rainfall inland. In general, the rocky formation of the area has low water storage capacity, hence, coupled with erratic recharge rates, there is concerns about the potential for over-abstraction of the aquifer.

While the campsite itself is not severely impacted by human-wildlife conflict, the broader conservancy does face challenges, such as the destruction of water points by elephants. Addressing these issues is crucial for improving the livelihoods within the Ohungu Conservancy.

The proposed drilling site is devoid of vegetation and will not necessitate the construction of access roads, which minimizes environmental disturbance.

Mostly, this study was conducted with a high degree of certainty, and most potential impacts have been assessed and can be mitigated to insignificant levels. Based on the risk assessment outcomes and the proposed mitigation strategies, the project is not anticipated to have significant adverse effects on the environment. However, adequate monitoring of the borehole's performance is critical for assessing both the level and quality of groundwater.

4.2 Recommendations

It is recommended that the approving authority approves the issuance of the Environmental Clearance Certificate (ECC). A strong emphasis should be placed on safeguarding water quality and the health of the aquifer throughout the project's duration.

Ensuring high standards of water quality is crucial not only for the well-being of local communities but also for the preservation of the surrounding ecosystems that rely on these water resources. Monitoring plans should be established to regularly assess water quality and aquifer conditions.

Additionally, the implementation of best practices in water management and conservation will be essential in maintaining the sustainability of the aquifer to foster a responsible and environmentally-freindly approach that supports both human needs and ecological sustainability.